INCH-POUND

MIL-C-28754/38D
23 March 1994
SUPERSEDING
MIL-C-28754/38C
7 August 1984

MILITARY SPECIFICATION SHEET


CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR, TYPE III, CONTACT, GROUNDING, WRAPPOST

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-28754.

AMSC N/A
FSC 5935
DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:41Z
Check the source to verify that this is the current version before use.

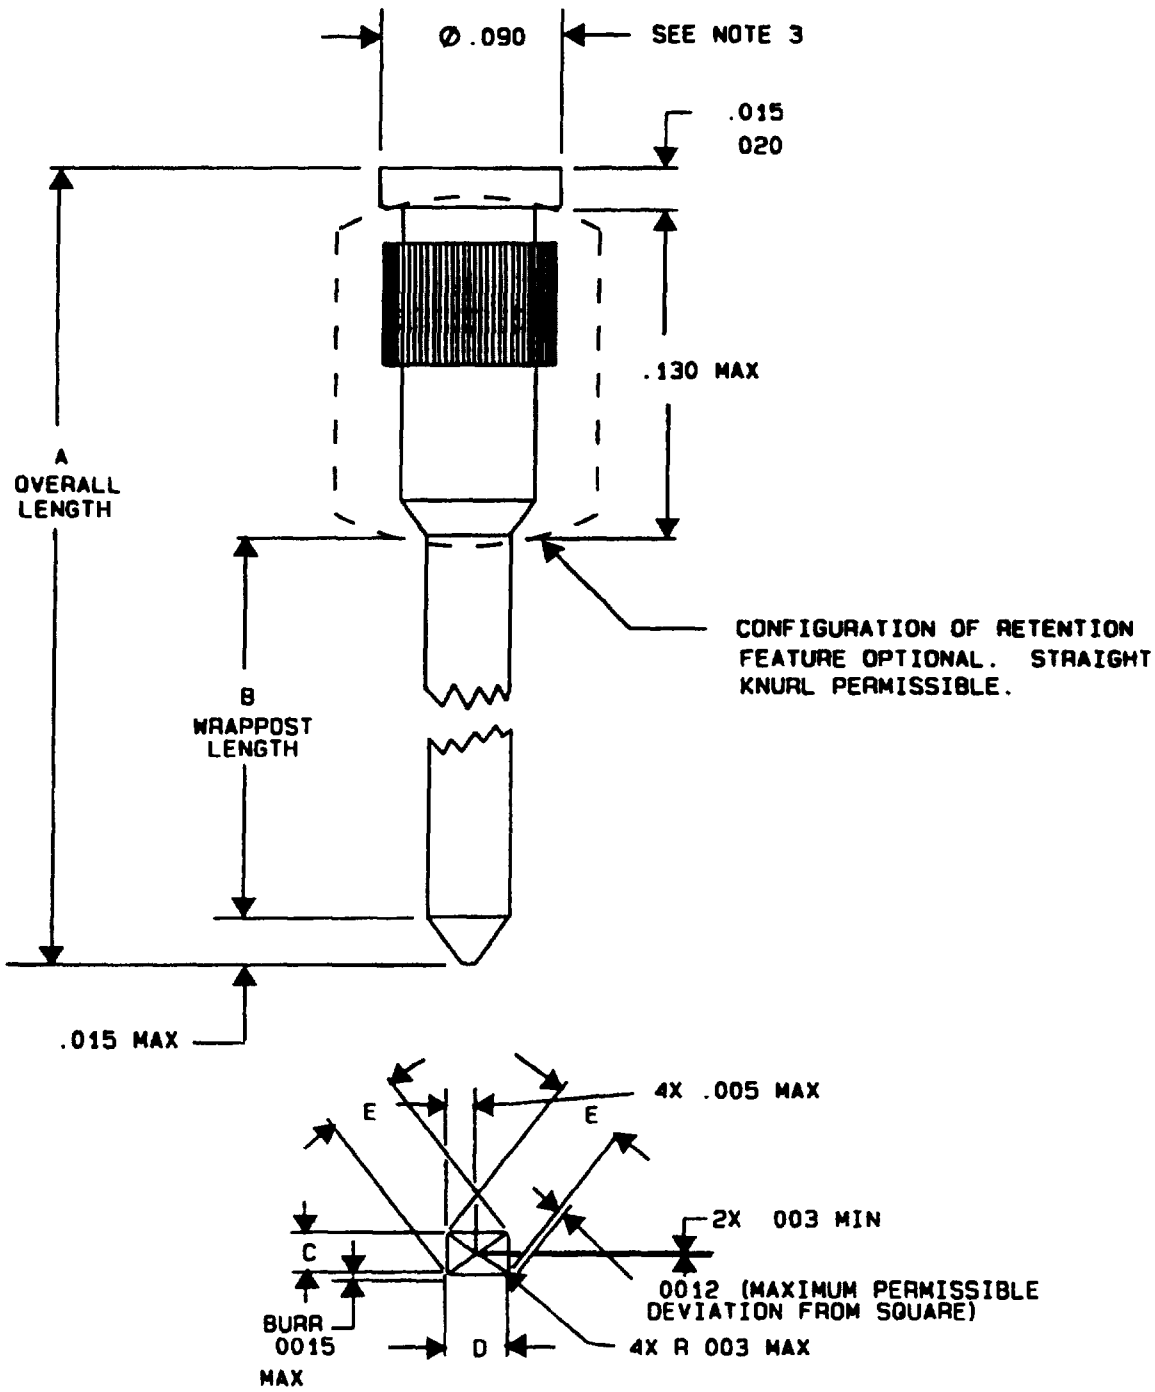

* FIGURE 1. Contact, grounding wrappost.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:41Z
Check the source to verify that this is the current version before use.

Inches	MM	Inches	MM
.002	.05	.020	.51
.003	.08	.025	.64
.005	.13	.090	2.29
.015	.38	.130	3.30

Wrappost Geometry				
C	D	E	Parallelism	Straightness
.025 (Nom) .022 (Min)	.025 (Nom) .022 (Min)	.0355 (Max) .0325 (Min)	.002	.005 in/in

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. .090 plus or minus .005 square permissible.
4. See table I for dimensions A and B.
5. .003 minimum diameter permissible.

* FIGURE 1. Contact, grounding wrappost - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:41Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See table I and figure 1.

Material:

*Contacts: Contacts shall be beryllium copper in accordance with ASTM B196, alloy UNS No. C17200, minimum hardness of TD04.

Contact plating: In accordance with MIL-C-28754.

TABLE I. Dash numbers and dimensions.

Dash no	Overall length "A" ± 0.010	Wrappost length "B" (Ref)
01	0.320	0.175
02	0.395	0.250
03	0.495	0.350
04	0.645	0.500
05	0.770	0.625
06	0.895	0.750

Performance:

Mounting plate to contact resistance: Voltage drop shall not exceed 20 millivolts.

Current rating: 3 amperes.

Temperature rating: -55°C to +105°C.

Military part number M28754/38- (dash number from table I).

Marking: In accordance with MIL-C-28754 and figure 1.

Shipping: Bulk shipment shall be in unassembled condition.

Supersession data: This specification includes the requirements of weapons specification number WS6157/5, code identification 10001.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:41Z
Check the source to verify that this is the current version before use.

*QUALIFICATIONS: See appendix.

Changes from previous issue: The margins of this specification sheet are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

*Custodians:
Army - CR
Navy - NW
Air Force - 85

Review activities:
Navy - MC
Air Force - 11, 99
DLA - ES

User activities:
Army - AR, MI
Navy - AS, YD

Preparing activity:
Navy - NW

(Project 5935-3838-05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:41Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1 The preparing activity must complete blocks 1, 2, 3, and 8 In block 1, both the document number and revision letter should be given.

2 The submitter of this form must complete blocks 4, 5, 6, and 7

3 The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-C-28754/38D	1994 March 23

3 DOCUMENT TITLE
Connectors, Electrical, Modular, Connector, Type III, Contact, Grounding, Wrappost

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a NAME	b TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
Technical Point of Contact (TPOC): Mr. Joseph P. Toy (Code 603A) PLEASE ADDRESS ALL CORRESPONDENCE AS FOLLOWS	TPOC: 812-854-5993	88-482-5993
c ADDRESS (Include Zip Code) Commander ATTN: Joseph P. Toy, Code 603A, Bldg. 2917 NAVSURFWARCENDIV, 300 Highway 361 Crane, IN 47522-5001	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT. Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:41Z
Check the source to verify that this is the current version before use.