
# MILITARY SPECIFICATION SHEET

## CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR, TYPE III, KEYING PEGS


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-28754.

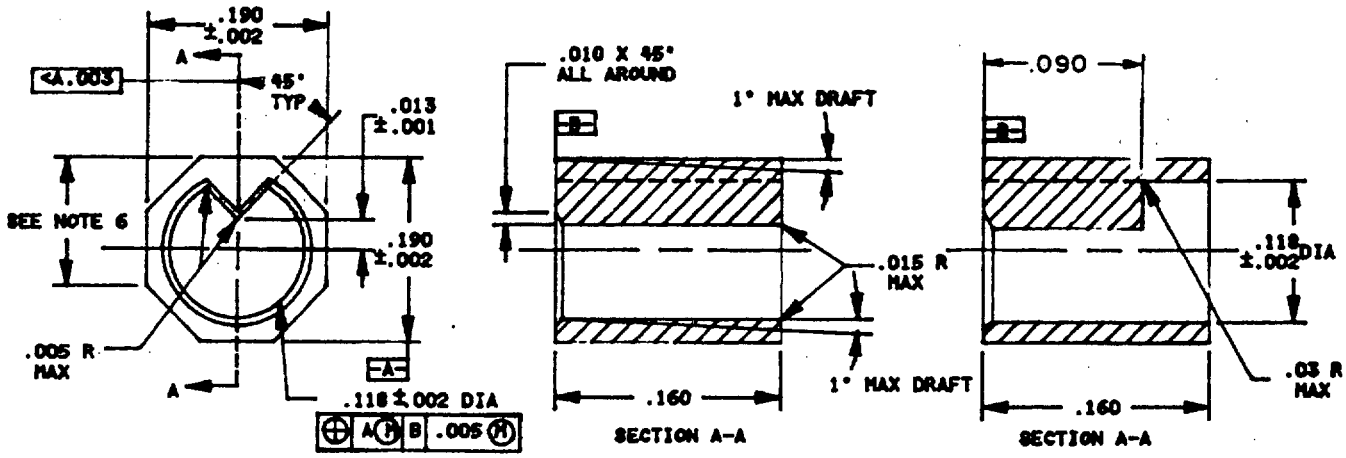


CONFIGURATION A (-01 and -04)

OPTIONAL CONFIGURATION

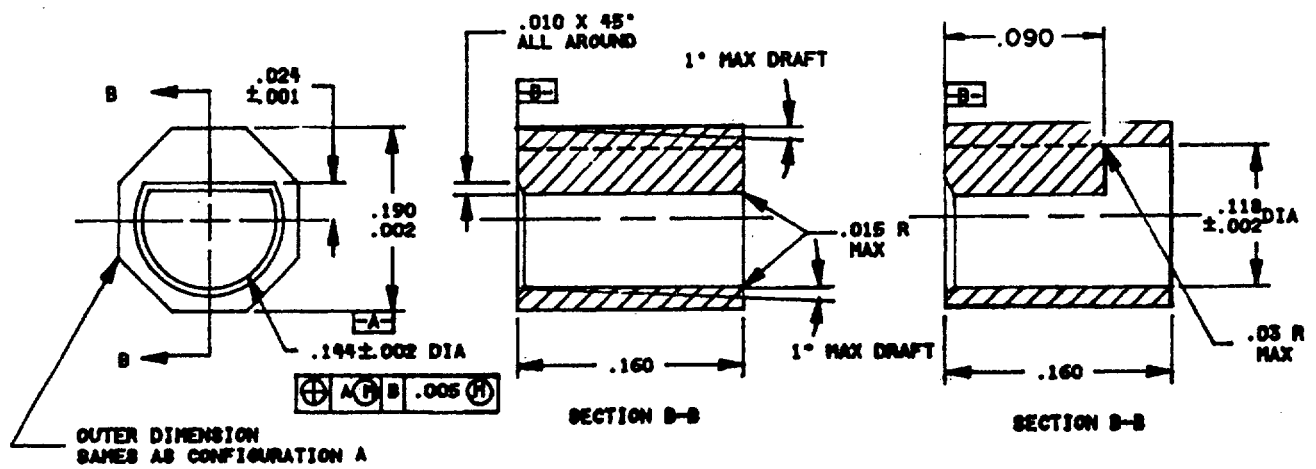


CONFIGURATION B (-02 and -05)


OPTIONAL CONFIGURATION

FIGURE 1. Dimensions and configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:42Z
Check the source to verify that this is the current version before use.



FSC 5935

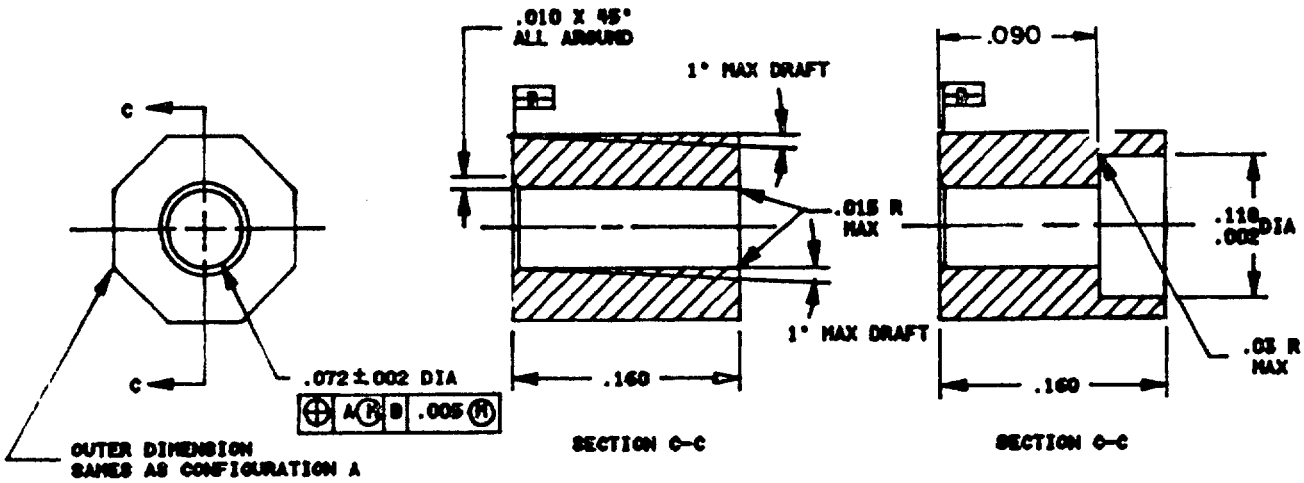


CONFIGURATION C (-03 and -06)

OPTIONAL CONFIGURATION

| INCHES | MM |
|---|---|
| .001 | 0.03 |
| .002 | 0.05 |
| .003 | 0.08 |
| .005 | 0.13 |
| .010 | 0.25 |
| .015 | 0.38 |
| .024 | 0.61 |
| .030 | 0.76 |
| .072 | 1.83 |
| .090 | 2.29 |
| .118 | 3.00 |
| .144 | 3.66 |
| .160 | 4.06 |
| .190 | 4.83 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Inside corners .005 R maximum, unless otherwise specified.
4. Dimensions shown do not include draft. Maximum draft of one degree will be permitted.
5. Unless otherwise specified, tolerences are ±.005 (0.13 mm) for three place decimals ±.01 (0.3 mm) for two place decimals and ±2° for angles.
6. The geometric configuration in an octagon consisting of eight equal sides.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:42Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See table I and figure 1.

Material: Polycarbonate per L-P-393, or sintered metal.

Keying pegs: These keying pegs are inserted into the female polarizing bushing covered by outline "C" of MIL-C-28754/37, and mate up with keying pins per MIL-C-28754/24.

Military part number M28754/39- (dash number from table I).

TABLE I. Dash numbers and characteristics.

| Dash number | Figure number | Material | Supersedes NAVORD part number | MIL-C-28754/24 mating keying pin |
|---|---|---|---|---|
| 001 | 1A | Polycarbonate | 2300799-1 | M28754/24-03 |
| 002 | 1B | | 2300799-2 | M28754/24-01 or 02 |
| 003 | 1C | | 2300799-3 | Not applicable |
| 004 | 1A | Sintered metal | | M28754/24-03 |
| 005 | 1B | | | M28754/24-01 or 02 |
| 006 | 1C | | | Not applicable |

Marking: In accordance with MIL-C-28754.

Supersession data: This specification sheet supersedes the requirements of NAVORD Drawing No. 2300799.

QUALIFICATION:

Qualification testing: Ten of each keying peg (see table I) to be qualified shall be submitted as loose parts. The loose parts shall be subjected to group A inspection.

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Navy - MC, TD
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, MI
Navy - AS, YD

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5935-3406-26)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:42Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

*(See Instructions – Reverse Side)*

| 1. DOCUMENT NUMBER | 2. DOCUMENT TITLE |
|---|---|
| MIL-C-28754/39B | CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR, TYPE |

| 3a. NAME OF SUBMITTING ORGANIZATION | 4. TYPE OF ORGANIZATION *(Mark one)* |
|---|---|
| | ☐ VENDOR |
| | ☐ USER |
| b. ADDRESS *(Street, City, State, ZIP Code)* | ☐ MANUFACTURER |
| | ☐ OTHER *(Specify)*: |

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

| 7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional | b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional |
|---|---|
| c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional | 8. DATE OF SUBMISSION *(YYMMDD)* |

*(TO DETACH THIS FORM, CUT ALONG THIS LINE.)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:42Z
Check the source to verify that this is the current version before use.

**INSTRUCTIONS:** In a continuing effort to make our standardization documents better, the DoD provides this form for submitting comments and suggestions for improvements. All users of military standardization documents are invited to p suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE* mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretatic too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate th problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are beinj considered.

*NOTE:* This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification o specification requirements on current contracts. Comments submitted on this form do not constitute or imply authoriza to waive any portion of the referenced document*(s)* or to amend contractual requirements.

*(Fold along this line)*

*(Fold along this line)*

DEPARTMENT OF THE NAVY
Naval Electronic Systems Command
Washington, DC 20363

NO PO
NECE
IF MA
IN T
UNITED

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20363
ATTN: ELEX 8111

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:42Z
Check the source to verify that this is the current version before use.