INCH-POUND

MIL-C-28754/39C
23 March 1994
SUPERSEDING
MIL-C-28754/39B
7 August 1984

MILITARY SPECIFICATION SHEET


CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR, TYPE III, KEYING PEGS

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.


The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-28754.

AMSC N/A
FSC 5935
DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:41Z
Check the source to verify that this is the current version before use.

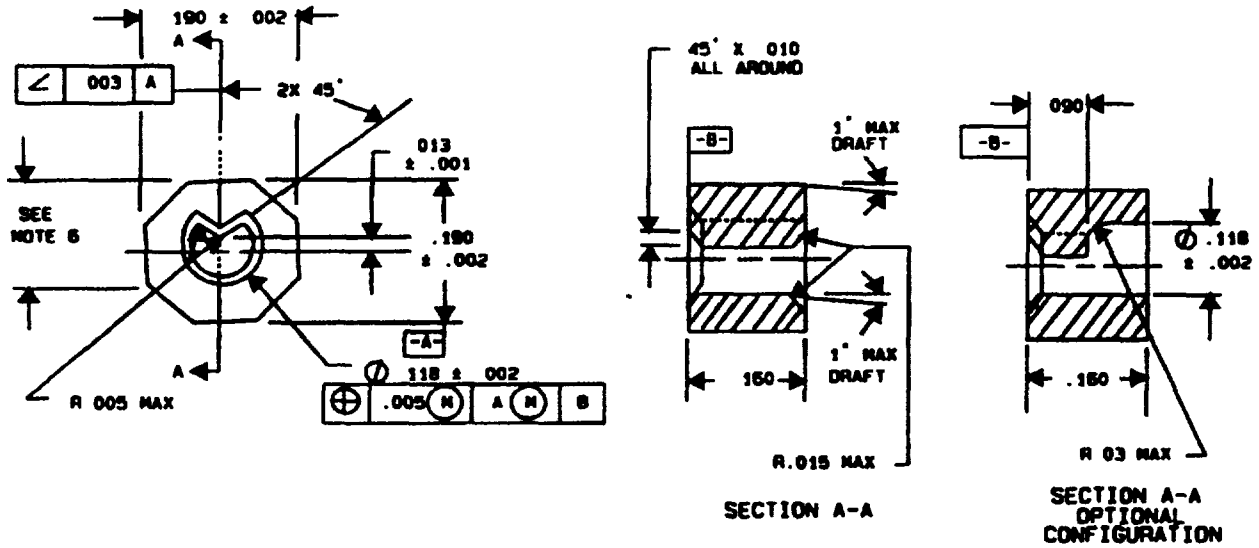


CONFIGURATION A (-01 AND -04)

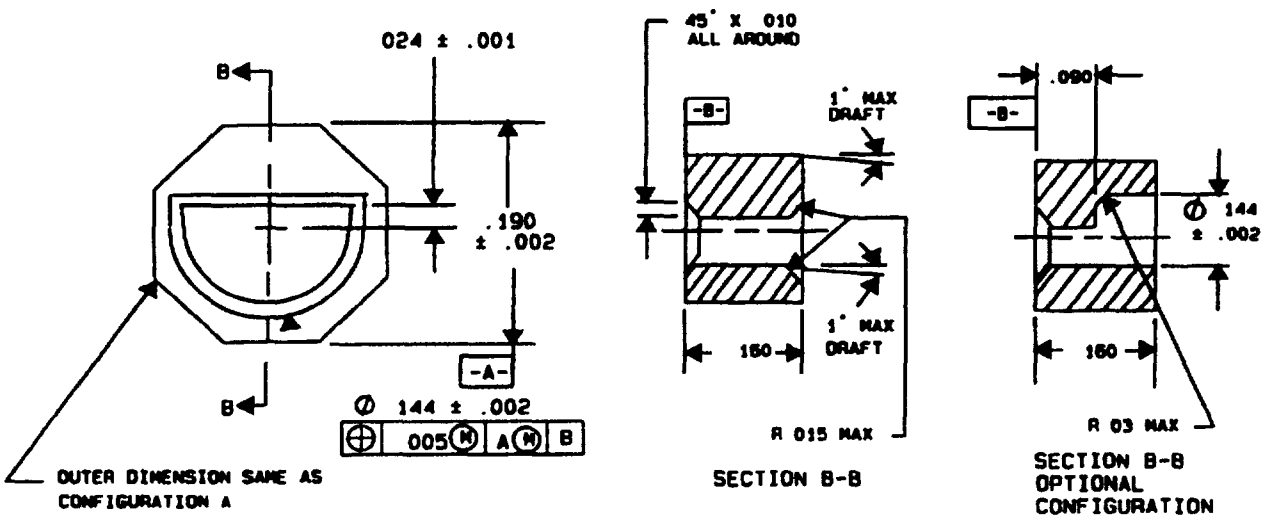

CONFIGURATION B (-02 AND -05)

* FIGURE 1. Dimensions and configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:41Z
Check the source to verify that this is the current version before use.

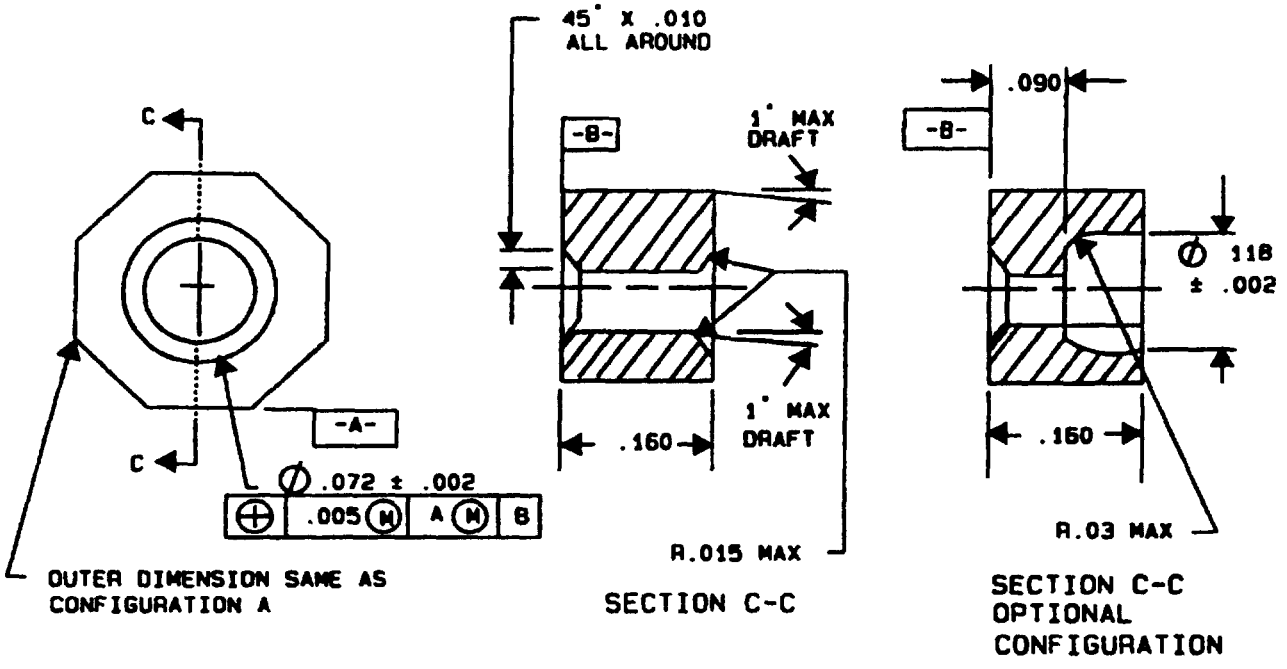

CONFIGURATION C (-03 AND -06)

Inches	MM	Inches	MM	Inches	MM	Inches	MM
.001	.03	.010	.25	.072	1.83	.160	4.06
.002	.05	.015	.38	.090	2.29	.190	4.83
.003	.08	.024	.61	.118	3.00		
.005	.13	.030	.76	.144	3.66		

* FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:41Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, inside corners .005 R maximum.
4. Dimensions shown do not include draft. Maximum draft of one degree will be permitted.
5. Unless otherwise specified, tolerances are plus or minus .005 inch (.13 mm) on three place decimals, plus or minus .01 inch (.3 mm) on two place decimals and plus or minus 2° on angles.
6. The geometric configuration is an octagon consisting of eight equal sides.

* FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:41Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See table I and figure 1.

*Material: Polycarbonate in accordance with ASTM D3935, PC110B30720E01F02, or ASTM B525, grade II, type 1.

*Keying pegs: These keying pegs are inserted into the female polarizing bushing covered by outline "C" of MIL-C-28754/37, and mate up with keying pins per MIL-C-28754/24. Method of retention in the female polarizing bushing shall be specified in the backplane assembly drawing.

Marking: In accordance with MIL-C-28754.

Supersession data: This specification sheet supersedes the requirements of NAVORD Drawing Number 2300799.

Military part number: M28754/39- (dash number from table I).

TABLE I. Dash numbers and characteristics.

Dash no	Figure no	Material	Supersedes NAVORD part number	MIL-C-28754/24 mating keying pin
001	1A	Polycarbonate	2300799-1	M28754/24-03
002	1B		2300799-2	M28754/24-01 or 02
003	1C		2300799-3	Not applicable
004	1A	Sintered metal		M28754/24-03
005	1B			M28754/24-01 or 02
006	1C			Not applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:41Z
Check the source to verify that this is the current version before use.

QUALIFICATIONS:

*Qualification testing: Ten of each keying peg (see table I) to be qualified shall be submitted as loose parts. The loose parts shall be subjected to group A inspection, and dash numbers 004, 005 and 006 shall be subjected to salt spray (corrosion) in accordance with 4.10.2.3.

Changes from previous issue: The margins of this specification sheet are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

*Custodians:
Army - CR
Navy - NW
Air Force - 85

Review activities:
Navy - MC
Air Force - 11, 99
DLA - ES

User activities:
Army - AR, MI
Navy - AS, YD

Preparing activity:
Navy - NW

(Project 5935-3838-06)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:41Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-C-28754/39C	1994 March 23

3. DOCUMENT TITLE
Connectors, Electrical, Modular, Connector, Type III, Keying Pegs

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a NAME	b TELEPHONE (Include Area Code)
Technical Point of Contact (TPOC): Mr. Joseph P. Toy (Code 603A) PLEASE ADDRESS ALL CORRESPONDENCE AS FOLLOWS:	(1) Commercial: TPOC: 812-854-5993 (2) AUTOVON: 88-482-5993
c ADDRESS (Include Zip Code) Commander ATTN: Joseph P. Toy, Code 603A, Bldg. 2917 NAVSURFWARCENDIV, 300 Highway 361 Crane, IN 47522-5001	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:41Z
Check the source to verify that this is the current version before use.