INCH-POUND

MIL-DTL-28754/39D
14 May 2015
SUPERSEDING
MIL-C-28754/39C
23 March 1994

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR, TYPE III, KEYING PEGS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-C-28754.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:41Z
Check the source to verify that this is the current version before use.


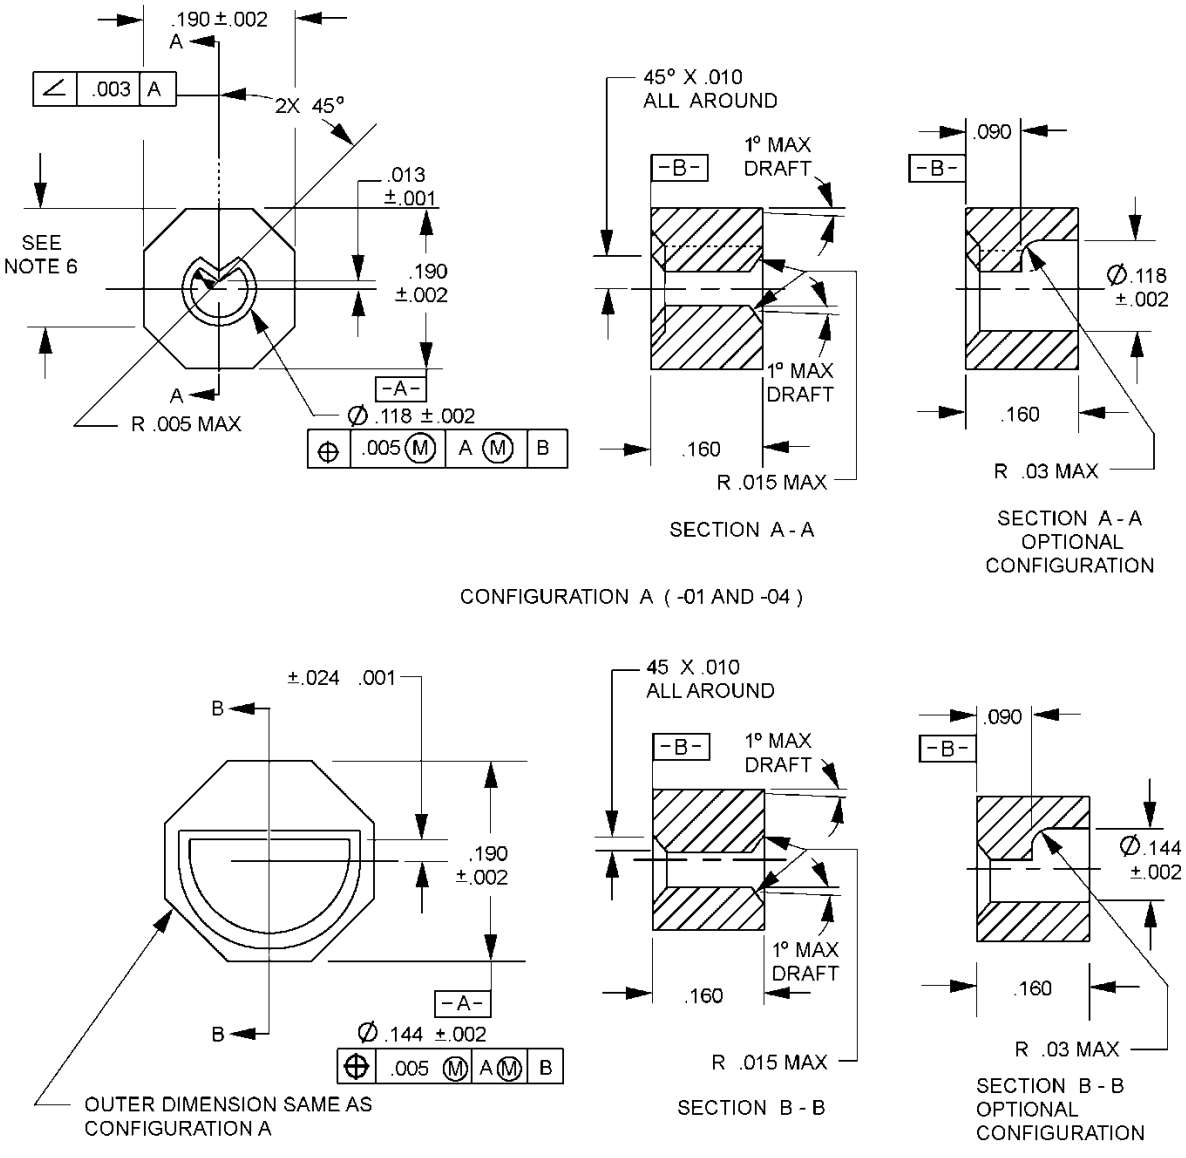


FIGURE 1. Dimensions and configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:41Z
Check the source to verify that this is the current version before use.

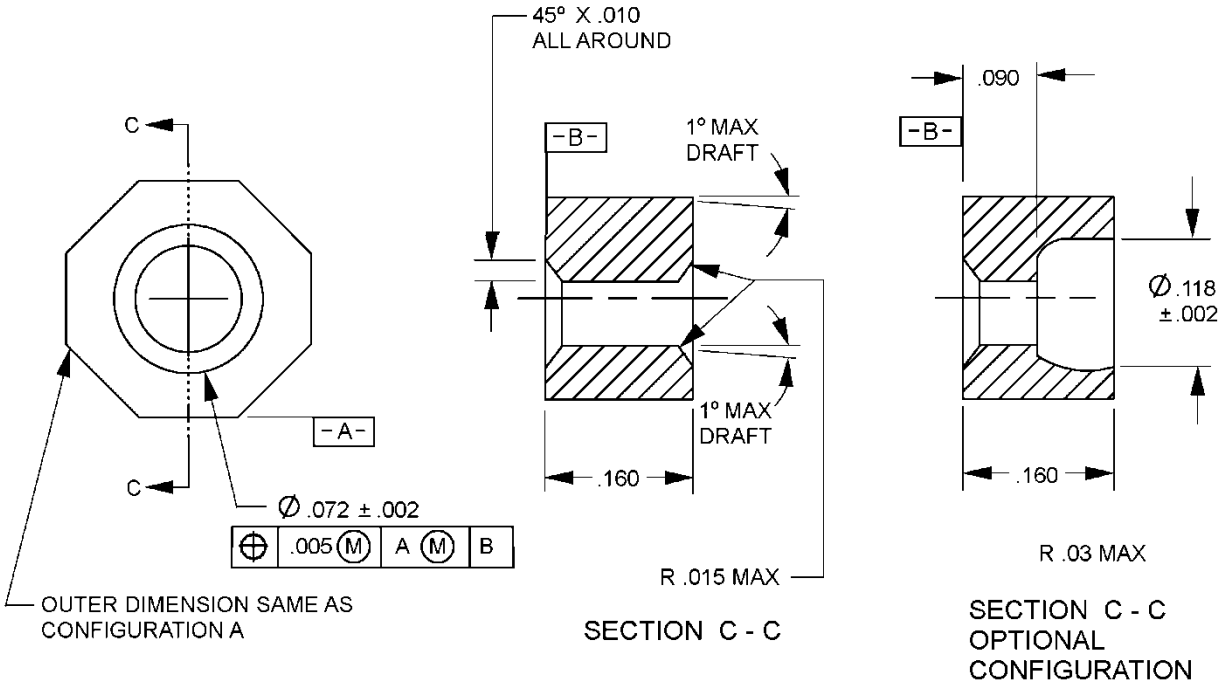

CONFIGURATION C (-03 AND -06)

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.001	.03	.010	.25	.072	1.83	.160	4.06
.002	.05	.015	.38	.090	2.29	.190	4.83
.003	.08	.024	.61	.118	3.00		
.005	.13	.030	.76	.144	3.66		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, inside corners .005 R maximum.
4. Dimensions shown do not include draft. Maximum draft of one degree will be permitted.
5. Unless otherwise specified, tolerances are ±.005 inch (.13 mm) on three place decimals, ± .01 inch (.3 mm) on two place decimals and ± 2° on angles.
6. The geometric configuration is an octagon consisting of eight equal sides.

FIGURE 1. Dimensions and configurations – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:41Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See table I and figure 1.

Material: Polycarbonate in accordance with ASTM D3935, PC110B30720E01F02, or ASTM B525, grade II, type 1.

Keying pegs: These keying pegs are inserted into the female polarizing bushing covering by outline “C” of MIL-DTL-28754/37, and mate up with keying pins per MIL-DTL-28754/24. Method of retention in the female polarizing bushing shall be specified in the backplane assembly drawing.

Marking: In accordance with MIL-C-28754.

Part or Identifying Number (PIN): M28754/39- (dash number from table I).

TABLE I. Dash numbers and characteristics.

Dash no.	Figure no.	Material	MIL-DTL-28754/24 mating keying pin
001	1A	Polycarbonate	M28754/24-03
002	1B		M28754/24-01 or 02
003	1C		Not applicable
004	1A	Sintered metal	M28754/24-03
005	1B		M28754/24-01 or 02
006	1C		Not applicable

First article testing: Perform the applicable tests as specified in MIL-C-28754 and the appendix thereto.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Referenced documents. In addition to MIL-C-28754, this document references the following:

MIL-DTL-28754/24
MIL-DTL-28754/37
ASTM D3935
ASTM B525

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:41Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – AS
Air Force – 85
DLA - CC

Review activities:
Army – AR, MI
Navy – MC, YD
Air Force – 99

Preparing activity:
DLA - CC

(Project 5935-2015-128)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:41Z
Check the source to verify that this is the current version before use.