GGG–C–313a
APRIL 25, 1956
SUPERSEDING
Fed. Spec. GGG–C–313
August 8, 1951

FEDERAL SPECIFICATION

CHISELS, HAND; CAPE, DIAMOND POINT, FULLER, COLD, RIVET BUSTER, ROUND NOSE, SIDE CUTTING, SPLITTING AND BUTT

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. — This specification covers hand chisels used for cutting or shaping metals.

1.1.1 *Federal specification coverage.* — Federal specifications do not include all types, classes, and styles of the commodities indicated by the titles of the specifications, but are intended to cover only those most generally used by the Federal Government.

1.2 Classification.

1.2.1 *Types, classes, and styles.*—Hand chisels (metal working) covered by this specification shall be of the following types, classes, and styles, as specified (see 6.2):

Type I.—Cape.
  Style A.—Normal duty.
  Style B.—Heavy duty.
Type II.—Diamond point.
  Style A.—Normal duty.
  Style B.—Heavy duty.
Type III.—Fuller.
  Class 1.—Bent.
  Class 2.—Straight.
Type IV.—Cold.
  Class 1.—Regular length.
  Class 2.—Long.
Type V.—Rivet (rivet buster).
Type VI.—Round nose.
  Class 1.—Half.
    Style A.—Normal duty.
    Style B.—Heavy duty.
  Class 2.—Full.
Type VII.—Side-cutting.
Type VIII.—Splitting.
  Class 1.—Bent.
  Class 2.—Straight.
  Class 3.—Concave.
Type IX.—Butt tool.

1.2.2 *Sizes.*—Chisels covered by this specification shall be the sizes (width of cutting end) shown in the respective tables, as specified (see 6.2).

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 Specifications.—There are no other specifications applicable to this specification except those referenced in section 7 by the individual departments.

(Activities outside the Federal Government may obtain copies of Federal Specifications and Standards as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, Seattle, and Washington, D. C.

(Federal Government activities may obtain copies of Federal Specifications and Standards and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

162249—56—No. 263

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

2.2 Standards.—The following standard, of the issue in effect on date of invitation for bids, forms a part of this specification:

Military Standard:

MIL–STD–105—Sampling Procedures and Tables for Inspection by Attributes.

(Copies of Military specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

2.3 Specifications applicable only to individual *departments* are listed in section 7.

3. REQUIREMENTS

3.1 Illustrations. — The illustrations shown herein are for the convenience of identification and are not intended to preclude purchase of chisels which are otherwise in accordance with the requirements of this specification.

3.2 Material. — The chisels covered by this specification shall be hot-forged of an alloy steel having wear- and shock-resisting properties and the heat-treatment employed shall be such as to produce chisels that shall withstand the tests specified in 4.5.

3.3 Hardness.

3.3.1 *Work end.*—The work end of the chisels shall be hardened to not less than 53 nor more than 59 on a Rockwell C scale when tested as specified in 4.5.1.

3.3.2 *Striking end.*—The striking end of the chisels shall be heat-treated to show not less than 32 nor more than 45 on a Rockwell C scale when tested as specified in 4.5.1.

3.4 Finish.—The chisels shall be free from burrs, roughness and excessive oxide scale. The work end of all chisels including the taper shall be smoothly ground to produce a surface finish not coarser than that produced by an 80 grit abrasive. The striking end of all chisels shall be neatly and uniformly chamfered and shall be ground at right angles with the longitudinal axis of the tool. The body of the chisel shall be provided with a coat of paint, shall be enameled or oil coated.

3.5 Body shape. — The bodies of all hand chisels shall be either square, hexagonal, or octagonal in cross section. Chisels with a square body shall be either quarter octagon or have the corners suitably rounded.

3.6 Marking. — Each hand chisel shall be plainly and permanently marked with the manufacturer's name or with a trade-mark of such known character that the source of manufacture may be readily determined.

3.7 Type I, cape.—Type I chisels shall have a double-beveled cutting edge ground on both sides to an included angle of 60 degrees having a tolerance of plus or minus 3 degrees.

3.7.1 *Style A, normal duty.*—Style A chisels shall conform to table I and be similar to figure 1.

TABLE I.—*Type I, style A, cape, normal duty*

Size (Width of cutting edge) A	Distance across flats B	Widest section of blade C	Thickness at work end D	Length E	Thinnest section of blade F	Length overall L
± 1/32	Minimum	Minimum	± 1/64	Minimum	± 1/64	Minimum
Inch	*Inch*	*Inches*	*Inch*	*Inches*	*Inch*	*Inches*
1/8	5/16	1/2	1/32	1 1/2	1/32	4 1/2
5/32	11/32	1/2	1/32	1 1/4	1/16	5
1/4	3/8	9/16	1/32	2 1/4	1/64	5
5/16	1/2	5/8	1/64	2 3/4	1/32	6
3/8	5/8	3/4	1/64	3	1 1/64	6 1/2
1/2	3/4	7/8	1/64	3 1/4	2 1/64	7
5/8	3/4	1 1/16	1/8	3 1/2	2 5/64	7
3/4	7/8	1 1/16	1/8	4	1/2	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

TABLE II.—*Type I, style B, cape, heavy duty*

Size (Width of cutting edge) A	Distance across flats B	Widest section of blade C	Thickness at work end D	Length E	Thinnest section of blade F	Length overall L
± 1/32	Minimum	Minimum	± 1/64	Minimum	± 1/64	Minimum
Inch	*Inch*	*Inches*	*Inch*	*Inches*	*Inch*	*Inches*
1/8	9/32	5/32	1/32	2	1/16	6 3/4
1/4	11/32	5/32	1/32	2 1/4	1/32	6 3/4
5/16	13/32	1 1/32	1/16	2 1/16	1/32	7 1/4

3.7.2 *Style B, heavy duty.*—Style B chisels shall conform to table II and be similar to figure 1.

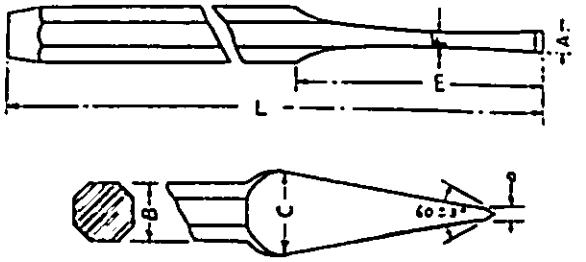


FIGURE 1.—Type I, styles A and B, cape, normal duty and heavy duty.

3.8 **Type II, diamond point.**—Type II chisels shall have the work end tapered and square in cross section. The work end shall be provided with a single bevel having a diamond-shaped surface.

TABLE III.—*Type II, style A, diamond point, normal duty*

Size (width of cutting edge) A	Distance across flats B	Thickness at work end D	Length of taper E	Length over-all L
± 1/32	Minimum	± 1/32	Minimum	Minimum
Inch	*Inch*	*Inch*	*Inches*	*Inches*
1/8	5/32	1/16	1 1/2	4 1/2
5/32	5/32	5/32	1 3/4	5
1/4	3/16	1/4	2	5 1/2
5/16	1/2	5/32	2 1/4	6
3/8	5/8	3/8	2 3/4	6 1/2
1/2	3/4	1/2	2 7/8	7
5/8	3/4	5/8	3	7 1/2
3/4	7/8	3/4	3 1/4	8

3.8.1 *Style A, normal duty.*—Style A chisels shall conform to table III and be similar to figure 2.

3.8.2 *Style B, heavy duty.*—Style B chisels shall conform to table IV and be similar to figure 2.

TABLE IV.—*Type II, style B, diamond point, heavy duty*

Size (width of cutting edge) A	Distance across flats B	Thickness at work end D	Length of taper E	Length over-all L
± 1/32	Minimum	± 1/32	Minimum	Minimum
Inch	*Inch*	*Inch*	*Inches*	*Inches*
1/8	5/16	1/32	2	6 1/2
11/32	3/4	11/32	2 1/4	7

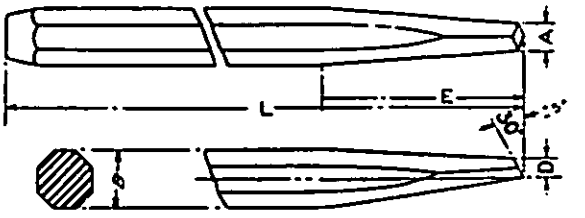


FIGURE 2.—Type II, styles A and B, diamond point, normal and heavy duty.

3.9 **Type III, fuller.**—Type III chisels shall be for use as a hand swaging and calking tool.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

TABLE V.—*Type III, fuller chisel, class 1, bent, and class 2, straight*

Size (Width of working edge) A	Distance across flats B	Thickness of work end D	Length of taper E	Offset (class A only) F	Over-all length L	Radius R
± 1/32	Minimum	± 1/64	Minimum	Maximum	Minimum	± 1/64
Inch	*Inch*	*Inch*	*Inches*	*Inch*	*Inches*	*Inch*
1/2	3/4	1/4	2 3/4	1/2	6 3/4	1/8

3.9.1 *Class 1, bent.* — Class 1 chisels shall have the work end tapered and the entire tapered portion shall be uniformly bent. Class 1 chisels shall conform to table V, and be similar to figure 3.

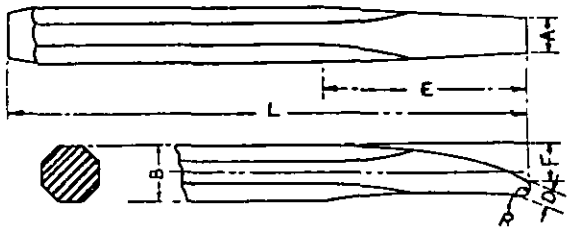


FIGURE 3.—Type III, class 1, bent fuller chisel.

3.9.2 *Class 2, straight.*—Class 2 chisels shall have a straight tapered work end, conform to the applicable requirements of table V and be similar to figure 4.

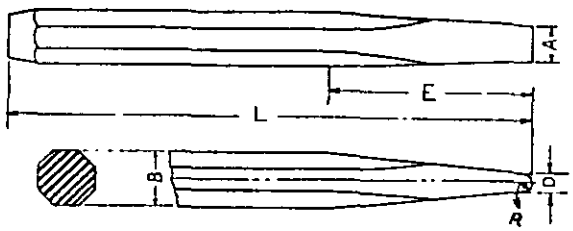


FIGURE 4.—Type III, class 2, straight fuller chisel.

3.10 Type IV, cold chisel.—Type IV chisel shall have a double-beveled cutting edge ground on both sides to an included angle of 60 degrees having a tolerance of plus or minus 3 degrees. The cutting edge shall be straight and shall be 90 degrees to the longitudinal axis of the chisel plus or minus 2 degrees.

3.10.1 *Class 1, regular length.*—Class 1 chisels shall conform to table IV and be similar to figure 5.

TABLE VI.—*Type IV, class 1, regular length cold chisels*

Size (width of cutting edge) A	Distance across flats B	Thickness of cutting edge D	Nominal length of taper E	Over-all length L
± 1/32	Minimum	± 1/64	Minimum	Minimum
Inches	*Inch*	*Inch*	*Inches*	*Inch*
1/4	5/16	1/16	1 15/32	4
5/16	1/4	1/16	1 1/2	4
3/8	5/16	1/16	1 3/4	5
7/16	3/8	1/16	2	5 1/2
1/2	1/16	3/32	2	5 3/4
5/8	1/2	3/32	2 1/4	6
3/4	5/8	3/32	2 1/4	6 1/2
7/8	3/4	1/8	2 3/4	7 1/2
1	7/8	1/8	3	8
1 1/8	1	1/8	3 1/4	8 1/2

3.10.2 *Class 2, long.* — Class 2 chisel shall conform to table VII and be similar to figure 5.

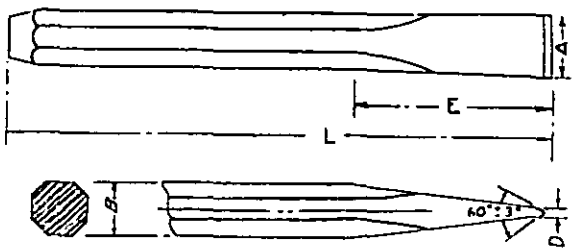


FIGURE 5.—Type IV, cold chisel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

TABLE VII.—*Type IV, class 2, long, cold chisels*

Size (width of cutting edge) A	Distance across flats B	Thickness of cutting edge D	Length of taper E	Over-all length L
± 1/32	Minimum	± 1/64	Minimum	± 1/4
Inches	*Inches*	*Inch*	*Inches*	*Inches*
1/2	11/32	1/32	1 3/4	8, 10, 12
5/8	7/16	1/32	2	8, 10, 12
3/4	5/8	1/16	2 1/4	12, 14, 16, 18
7/8	3/4	1/16	2 1/2	12, 14, 16, 18
1	7/8	1/16	2 3/4	12, 16, 18, 24
1 1/4	1 1/16	1/32	3 1/4	18, 24, 36
1 1/2	1 5/16	1/32	3 1/2	24, 36

3.11 Type V, rivet (rivet buster).—Type V chisel shall be for use in cutting hardened heads or burred ends from installed rivets. The work end shall have a single bevel and shall be uniformly bent so that the cutting edge is directly aligned with the longitudinal axis of the chisel body. Type V chisel shall conform to table VIII and be similar to figure 6.

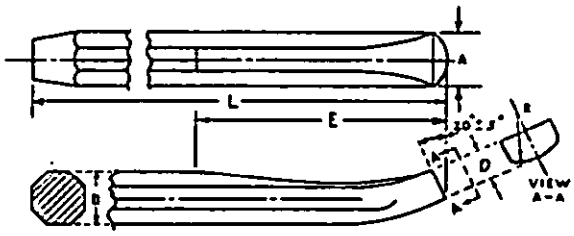


FIGURE 6.—Type V, rivet (rivet buster).

3.12 Type VI, round nose.

3.12.1 *Class 1, half.* — Class 1 chisels shall have a semicircular cutting edge with a single bevel.

3.12.1.1 *Style A, normal duty.* — Style A chisel shall conform to table IX and be similar to figure 7.

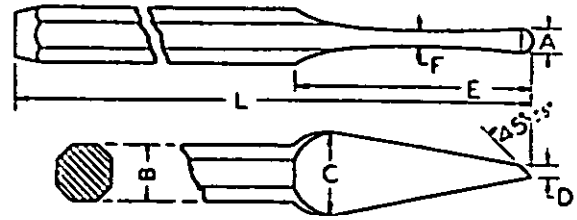


FIGURE 7.—Type VI, class 1, styles A and B, half, round nose chisel, normal and heavy duty.

TABLE VIII.—*Type V, rivet (rivet buster)*

Size (width of cutting edge) A	Distance across flats B	Thickness at work end D	Length of taper E	Over-all length L	Radius R
± 1/32	Minimum	± 1/32	Minimum	Minimum	Minimum
Inch	*Inch*	*Inch*	*Inches*	*Inches*	*Inch*
1/2	3/8	3/8	2 1/2	8 1/2	1/2
5/8	1/2	1/2	2 3/4	11 1/2	5/8
3/4	1/2	1/2	3 1/4	17 1/2	3/4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

TABLE IX.—*Type VI, class 1, style A, normal duty, half round nose chisel*

Size (Width of cutting edge) A	Distance across flats B	Widest section of blade C	Thickness at work end D	Length E	Thinnest section of blade F	Length overall L
± 1/32	Minimum	Minimum	± 1/64	Minimum	Minimum	Minimum
Inch	*Inch*	*Inches*	*Inch*	*Inches*	*Inch*	*Inches*
3/16	5/16	7/16	1/8	1 3/4	1/8	5
1/4	3/8	23/32	1/8	2 1/4	3/16	5 1/2
5/16	1/2	7/8	5/32	2 1/2	1/4	6
3/8	5/8	7/8	5/32	2 3/4	13/64	6
1/2	3/4	15/16	1/4	3	21/64	7
5/8	3/4	1	5/32	3 1/4	29/64	7 1/2
3/4	7/8	1 1/16	5/32	3 1/2	15/32	8

TABLE X.—*Type VI, class 1, style B, heavy duty, half-round nose chisel*

Size (Width of cutting edge) A	Distance across flats B	Widest section of blade C	Thickness at work end D	Length E	Thinnest section of blade F	Length overall L
± 1/32	Minimum	Minimum	± 1/64	Minimum	± 1/64	Minimum
Inch	*Inch*	*Inches*	*Inch*	*Inches*	*Inch*	*Inches*
1/4	5/8	3/4	1/8	2 1/4	5/32	6 3/4
5/16	3/4	1 1/8	5/32	2 1/2	1/4	7 1/4

3.12.1.2 *Style B, heavy duty.*—Style B chisels shall conform to table X and be similar to figure 7.

3.12.2 *Class 2, full.* — Class 2 chisels shall have the work end eccentrically tapered with respect to the longitudinal axis of the chisel body. The cutting edge shall be single-bevel ground so that the cutting edge has the shortest radius of the resulting flat, measured from the longitudinal axis of the chisel body. Class 2 chisels shall conform to table XI and shall be similar to figure 8.

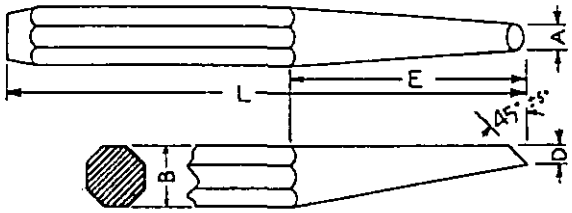


FIGURE 8.—Type VI, class 2, full, round nose chisel.

TABLE XI.—*Type VI, class 2, full-round nose chisel*

Size (width (dia.) of cutting edge) A	Distance across flats B	Thickness of work end D	Length of taper E	Over-all length L
± 1/32	Minimum	± 1/32	Minimum	Minimum
Inch	*Inch*	*Inch*	*Inches*	*Inch*
1/8	1/4	5/32	1 3/4	4 1/2
3/16	3/8	7/32	2	5
1/4	3/8	9/32	2 1/4	5 1/2
5/16	1/2	11/32	2 1/2	6
3/8	5/8	13/32	2 3/4	6
1/2	3/4	17/32	3	7
5/8	3/4	21/32	3 1/4	8
3/4	7/8	25/32	3 1/2	8 1/2
7/8	1	29/32	3 3/4	9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

3.13 Type VII, side-cutting. — Type VII chisels shall have a single beveled cutting edge. The work end shall be tapered so that the cutting edge is directly in line with the longitudinal axis of the chisel body. Type VII chisels shall conform to table XII and be similar to figure 9.

TABLE XII.—*Type VII, side-cutting chisel*

Size (width of cutting edge) A	Distance across flats B	Thickness at work end D	Length of taper E	Over-all length L
± 1/32	Minimum	± 1/64	Minimum	Minimum
Inch	*Inch*	*Inch*	*Inches*	*Inches*
1/16.....	5/32	1/16	2 1/4	7

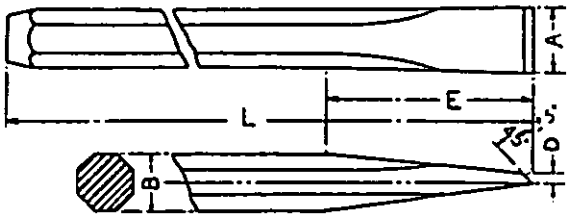


FIGURE 9.—Type VII, side-cutting chisel.

3.14 Type VIII, splitting.

3.14.1 *Class 1, bent.*—Class 1 chisels shall have a single beveled cutting edge. The work end shall be tapered and the tapered portion shall be uniformly bent. Class 1 chisel shall conform to table XIII and be similar to figure 10.

3.14.2 *Class 2, straight.*—Class 2 chisels shall have a single beveled cutting edge, and the work end shall be straight and uniformly tapered. Class 3 chisels shall conform to table XIV and be similar to figure 11.

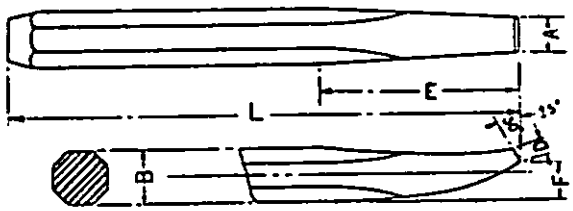


FIGURE 10.—Type VIII, class 1, bent splitting chisel.

TABLE XIV.—*Type VIII, class 2, straight splitting chisel*

Size (width of cutting edge) A	Distance across flats B	Thickness at work end D	Length of taper E	Over-all length L
± 1/32	Minimum	± 1/32	Minimum	Minimum
Inch	*Inch*	*Inch*	*Inches*	*Inches*
1/2.....	5/32	1/4	2 1/2	6 1/2

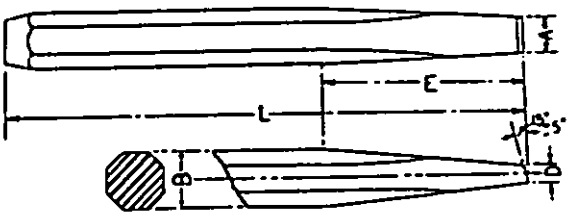


FIGURE 11.—Type VIII, class 2, straight splitting chisel.

TABLE XIII.—*Type VIII, class 1, splitting, bent*

Size (width of cutting edge) A	Distance across flats B	Thickness at work ends D	Length of taper E	Offset F	Length over-all L
± 1/32	Minimum	± 1/32	Minimum	Minimum	Minimum
Inch	*Inch*	*Inch*	*Inches*	*Inch*	*Inches*
1/2	5/32	1/16	2 1/2	1/32	6 1/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

3.14.3 *Class 3, concave.* — Class 3 splitting tool shall have a concave cutting end suitable for splitting bushings, mufflers, and tail pipes. Class 3 chisels shall conform to table XV and be similar to figure 12.

TABLE XV.—*Type VIII, class 3, concave splitting chisel*

Size (width of cutting edge) A	Distance across flats B	Thickness of work end C	Length of flat D	Over-all length L
± 1/32	Minimum	± 1/32	± 1/8	± 1/8
Inch	*Inch*	*Inch*	*Inches*	*Inches*
1/8.....	11/32	11/64	2 3/8	7 3/8

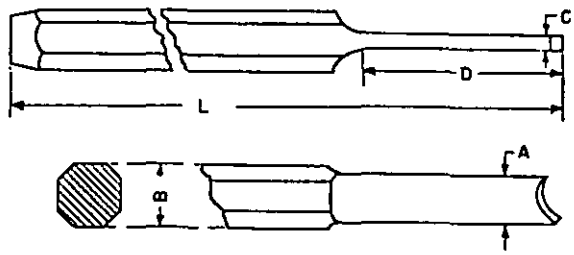


FIGURE 12.—Type VIII, class 3, concave splitting chisel.

3.15 Type IX, butt tool.—Butt tools shall conform to table XVI and be similar to figure 13.

TABLE XVI.—*Type IX, butt tool*

Size (width of work end) A	Distance across flats B	Thickness at work end D	Length of taper E	Over-all length L
± 1/32	*Minimum*	± 1/32	*Minimum*	*Minimum*
Inch	*Inch*	*Inch*	*Inches*	*Inches*
1/2.....	3/32	1/4	2 1/2	6 1/2

3.16 Workmanship.—Workmanship shall be of the highest grade throughout and equal in every respect to good commercial practice. Chisels shall be free from any imperfections that may affect their durability or serviceability.

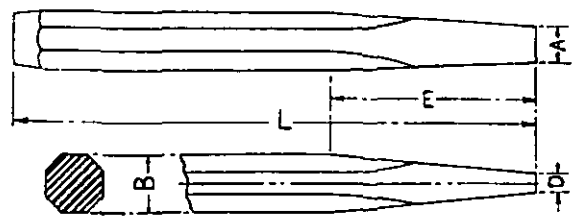


FIGURE 13.—Type IX, butt tool.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Inspection lot.—All chisels of the same size, type, class, and style presented at one time shall be considered a lot for purposes of acceptance, inspection, and test.

4.2 Sampling for inspection.

4.2.1 *Sampling for visual and dimensional inspection.*—A random sample of chisels shall be taken from each inspection lot of material offered for Government inspection of visual and dimensional characteristics with lot acceptance based on table XVII in accordance with Military Standard MIL–STD–105.

TABLE XVII.—*Sampling for visual and dimensional inspection A.Q.L. (approx.) = 1.5 percent defective*

Number of chisels in inspection lot	Number of chisels in sample	Acceptance number (defectives)	Rejection number (defectives)
15 and under..	7	0	1
16 to 40.....	10	0	1
41 to 110.....	15	0	1
111 to 300....	25	1	2
301 to 500....	35	1	2
501 to 800....	50	2	3
801 to 1300...	75	3	4
1301 and over.	110	4	5

NOTE.—The Government inspector may institute tightened or reduced inspection in accordance with Section 9 of Military Standard MIL-STD-105.

4.2.2 *Sampling for lot acceptance tests.*—A random sample of chisels shall be taken from each inspection lot in accordance with table XVIII and shall be subjected to the hardness and performance tests specified in 4.5.1 and 4.5.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

TABLE XVIII.—*Sampling for lot acceptance tests*

Number of chisels in an inspection lot	Number of chisels in sample	Acceptance number (number of items nonconforming on any lot acceptance test)	Rejection number
15 and under..	3	0	1
16 to 40.....	5	0	1
41 to 110.....	8	0	1
111 to 300....	12	0	1
301 to 500....	17	1	2
501 to 800....	25	1	2
801 and over..	35	2	3

4.3 Inspection.

4.3.1 *Visual and dimensional inspection.*— Each of the sample chisels taken in accordance with 4.2.1 shall be visually and dimensionally inspected to verify compliance with the requirements of this specification. Any chisels in the sample containing one or more visual or dimensional defects shall be rejected, and if the number of defective chisels in any sample exceeds the acceptance number for that sample, the lot represented by the sample shall be rejected.

4.4 Lot acceptance tests.

4.4.1 *Testing of sample chisels for lot acceptance.*—Each of the sample chisels taken in accordance with table XIX shall be tested in accordance with 4.5.1 and 4.5.2 to verify compliance with the requirements of this specification. Any sample chisel which does not meet the requirements for any of these characteristics shall be rejected, and if the number of nonconforming chisels in any sample exceeds the acceptance number for that sample, the lot represented by the sample shall be rejected.

4.5 Test procedures.

4.5.1 *Hardness test.*—Chisels shall be subjected to a hardness test to determine conformance with 3.3.1 and 3.3.2. The hardness requirements as specified shall be tested on a hardness testing machine utilizing the Rockwell C scale. In conducting the Rockwell hardness test, care shall be exercised to assure that the flat and tapered surfaces of the chisels under test shall be free from any case hardness, decarbonization or paint and be at right angles to the axis of the penetrator of the testing machine.

4.5.1.1 *Work end.*—Hardness impressions on the work end of the chisels shall be taken within ¼ to ½ inch from the cutting edge.

4.5.1.2 *Striking end.*—Hardness impressions on the striking end of the chisels shall be taken ½ inch from the striking end.

4.5.2 *Performance test.*

4.5.2.1 *Specimen for performance test.*— A steel bar, square or rectangle, of not less than ¾-inch thickness and of sufficient length shall be used in subjecting the chisel to the performance test. The bar shall be secured in a rigid manner on a solid foundation such as an anvil or steel block of not less than 20 pounds. For type I, cape; type IV, cold; and type VII, side-cutting chisels, the bar shall show a hardness of not less than 35 nor more than 40 on a Rockwell C scale. For type II diamond, type VI round nose, and type VIII splitting, the bar shall show a hardness of not less than 30 nor more than 35 on a Rockwell C scale.

4.5.2.2 *Method of test.*—The chisels shall be held firmly in as near a vertical position as possible with the work end resting on the flat surface of the test bar.

4.5.2.2.1 *Types I, IV, and VII chisels.*— Types I, IV and VII chisels shall be struck with a 2-pound machinist's hammer as squarely as possible a sufficient number of blows to produce an indentation in the test bar as specified in table XIX. At least ten indentations shall be made in the test bar by a chisel having 45 and 60 degree angles.

TABLE XIX.—*Types I, IV and VII*

Width of cutting edge	Depth of indentation + 1/64 − 0.000
Inch	*Inch*
Up to 1/8.....	1/8
1/8 to 5/16.....	3/16
Over 5/16.....	1/4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

4.5.2.2.2 *Types II, VI, and VIII chisels.*—Types II, VI, and VIII chisels shall be struck with a 2-pound machinist's hammer as squarely as possible to produce indentations in the bar. At least 25 indentations shall be made in the test bar by each sample chisel. The size of the hammer used for the various sizes shall be as specified in table XX.

TABLE XX.—*Types II, VI and VIII*

Width of cutting edge	Hammer	
	Weight	Handle length
Inch	*Pounds*	*Inches*
Up to 3/16	1	14
1/2 to 5/8	1 1/2	15
Over 5/8	2	16

4.5.2.2.3 Any failure by chipping, spalling, cracking, excessive dulling or turning of the cutting edge and mushrooming or chipping of the striking end during the test shall be cause for rejection.

4.6 Rejected lots.—Rejected lots may be offered again for Government inspection provided the contractor has repaired or removed all nonconforming chisels. The Government inspector shall again take samples from such resubmitted lots to verify compliance with the requirements of this specification.

5. PREPARATION FOR DELIVERY

5.1 Preservation. — Cleaning and preservation shall be in accordance with the manufacturer's standard practice.

5.2 Packaging.—Commercial packages will be acceptable.

5.3 Packing.—The equipment shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose in such manner as to insure acceptance and safe delivery to the designated point by common or other carrier at the lowest rate of the carrier.

5.4 Marking.

5.4.1 *Interior containers.*—Packages and interior containers shall be marked with the name of the material and the name or trade-mark of the contractor, of such known character that the source of supply may be readily determined.

5.4.2 *Exterior containers.*—Shipping containers shall be marked with the name of the item, the type and class, and the quantity contained therein, as defined by the contract or order, under which shipment is made, the name of the contractor and the number of the contract or order.

6. NOTES

6.1 Intended use.—Types I, II, IV, V, VI, and VII chisels are intended for cutting or chipping metals. Type III, classes 1 and 2, and type IX chisels are intended for shaping metals. Type VIII chisels are intended for splitting metal.

6.2 Ordering data.—Procurement documents should specify the following:

(a) Title, number and date of this specification.

(b) Type, class and style of chisel required (see 1.2.1).

(c) Size of chisel (width cutting end) required (see 1.2.2 and applicable tables).

(d) Specify length required for type IV, class 2 chisels (see 3.10.2).

(e) Whether preparation for immediate use, domestic storage, or overseas shipment is required (see section 7).

6.3 Supersession.

Type I, class A of Federal Specification GGG–C–313 dated 8 August 1951 shall be known in this specification as type I.

Type I, class B of Federal Specification GGG–C–313 dated 8 August 1951 shall be known in this specification as type VI, class 1.

6.4 Illustrations. — The illustrations herein are descriptive and not restrictive, and are not intended to preclude the purchase of hand chisels otherwise conforming to the requirements of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

6.5 **Transportation description.**—The applicable transportation description is:

Tools, not otherwise indexed by name.
Carload minimum weight 30,000 pounds.

Mechanics' hand tools, not otherwise indexed.
Truckload minimum weight 30,000 pounds.

Patent notice.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

7. DEPARTMENTAL REQUIREMENTS

7.1 The following specification, of the issue in effect on date of invitation for bids, forms a part of this specification for purchases made under this specification by the respective departments.

7.2 **Army, Navy, and Air Force.**

7.2.1 *Applicable specification:*

Military Specification:

MIL–P–15424—Packaging of Hand Tools for Domestic and Oversea Shipment and Storage.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

7.2.2 *Preparation for delivery.*—Chisels shall be cleaned, preserved, packaged, packed, and marked in accordance with Military Specification MIL–P–15424.

MILITARY INTEREST:
Army—O E Q Sig T
Navy—Sh A MC Or Y
Air Force.

U. S. GOVERNMENT PRINTING OFFICE: 1956

Copies of this specification may be purchased for 15 cents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.