GGG-F-00340(GSA-FSS)
AMENDMENT-2
October 6, 1970
SUPERSEDING
Interim Amendment-1
February 9, 1970

AMENDMENT

TO

INTERIM FEDERAL SPECIFICATION

FILES, ROTARY

This amendment was developed by the General Services Administration, Federal Supply Service, Standardization Division, Washington, D. C., 20406, based upon currently available technical information. The General Services Administration has authorized this amendment as a part of Interim Federal Specification GGG-F-00340(GSA-FSS), dated November 8, 1965.

PAGE 2

Paragraph 3.5: Delete and add:

3.5 Teeth. The teeth of the files shall be machine cut with right-hand spiral and ground after hardening. The depth of the teeth shall be uniform. The helix angle of the teeth shall be as specified in table I. The number of teeth shall be 25, plus or minus 2 teeth, and shall be counted at the largest diameter of the cutting head at right angle to the helix.

TABLE I. Helix angle of teeth

Type of file	Angle	
	Min.	Max.
I	12°	32°
II	15°	33°
III	18°	33°
IV	10°	33°
V	8°	28°
VI	14°	32°
VII	15°	33°
VIII	20°	36°

Add new paragraph 3.5.1 as follows:

3.5.1 Types I, II, III, V, VI, and VII. The teeth of the types I, II, III, V, VI, and VII files shall be similar to those shown in figure 9. The number of basic teeth shall be 6, plus or minus 2 teeth, and shall extend from the base to the nose of the cutting head. The intermediate teeth, located between the basic teeth, shall extend from the base of the cutting head and terminate at the basic teeth.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

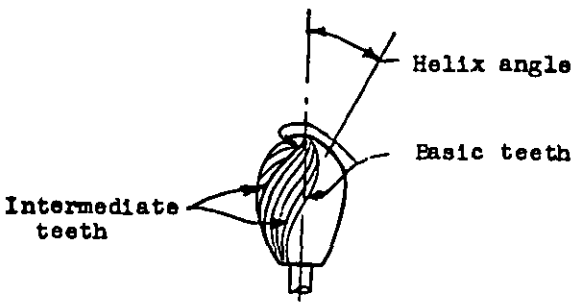

FIGURE 9 Tooth Design

Add new paragraph 3.5.2 as follows:

3.5.2 Types IV and VIII. The teeth of the types IV and VIII files shall be similar to those shown in figures 4 and 8 respectively. All teeth shall extend the full length of the cutting head.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.