GGG-P-00335a(GSA-FSS)
April 24, 1970
SUPERSEDING
Int. Fed. Spec. GGG-P-00335(GSA-FSS)
July 8, 1964

INTERIM FEDERAL SPECIFICATION

# PIKE POLE

This Interim Federal Specification was developed by the Standardization Division, Federal Supply Service, General Services Administration, Washington, D. C. 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

## 1. SCOPE AND CLASSIFICATION

1.1 Scope. The pike poles covered by this specification are for use in erecting utility poles.

1.1.1 Federal specification coverage. Federal specifications do not include all varieties of the commodity as indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

1.2 Classification.

1.2.1 Types, classes, and styles. Pike poles shall be of the following types, classes, and styles as specified (see 6.1):

Type I - Fixed pike.
  Class 1 - Wood pole.
    Style A - Without guard.
    Style B - With guard.

  Class 2 - Fiberglass pole.
    Style A - Without guard.
    Style B - With guard.

Type II - Reversible pike.
  Class 1 - Wood pole.
  Class 2 - Fiberglass pole.

1.2.2 Dimensions. Pike poles shall be of the dimensions specified in table I, and the length specified (see 6.1).

Table I. Pole dimensions

| Length | Diameters of tapered wood pole | | Diameter of straight wood or fiberglass pole, minimum |
|---|---|---|---|
| | Each end of pole, minimum | Center of pole, minimum | |
| Feet | Inches | Inches | Inches |
| 10 | 2 | 2-1/4 | 2 |
| 12 | 2 | 2-1/4 | 2 |
| 14 | 2 | 2-1/4 | 2 |
| 16 | 2 | 2-1/4 | 2 |
| 18 1/ | 2 | 2-1/4 | 2 |
| 20 1/ | 2 | 2-1/4 | 2 |

1/ It is recommended that fiberglass poles of these lengths not be procured since the "buckling" load may be too great.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 *The following documents of the issues in effect on the date of invitation for bids or* request for proposal, form a part of this specification to the extent specified herein:

Federal Specification:

PPP-P-40 - Packaging and Packing of Hand Tools.

Federal Standard:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

*MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.*
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specification procurement functions should be obtained from the procuring activity or as directed by the contracting officer.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

National Classification Board:

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Associations, Inc., Attention: Tariff Order Section, 1616 P Street, N. W., Washington, D. C.20036.

Uniform Classification Committee:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, 202 Union Station, 516 West Jackson Boulevard, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Illustrations. The illustrations shown herein are for the convenience of identification and are not intended to preclude the purchase of pike poles which are otherwise in accordance with the requirements of this specification.



Source: https://assist.dla.mil -- Downloaded: 202640-26T12:39Z
Check the source to verify that this is the currentversion before use.

3.2 Components. The pike pole shall consist of a pole with a steel; aluminum alloy; bronze; or malleable iron ferrule and spike-shaped steel pike on one end.

3.3 Type I, fixed pike.

3.3.1 Type I pike shall be of tempered forged steel, one-piece construction, with spike-shaped tip. As specified (see 6.1), the tip shall be plain or screw-type. A shoulder shall rest against the end of the pole, and a tang of suitable length shall be securely embedded in the pole, or otherwise securely fixed in a ferrule-type holder to form a sturdy connection with the pole. Pike point shall be similar to, and of the length specified on figure 1.

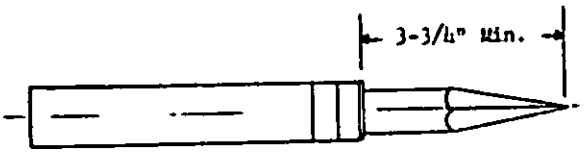



Figure 1. - Type I, fixed pike - plain tip.
(See fig. 2 for screw-type tip.)

3.3.2 Ferrule. A steel; aluminum alloy; bronze; or malleable iron ferrule shall be tightly fitted on the pike end of the pole and secured by means of a headed rivet or expanding pin.

3.3.3 Class 1, wood pole. Class 1 wood pole shall be of Douglas fir or white ash. Fir shall be virgin growth with straight, close grain, having not less than 8 nor more than 22 growth rings per inch. Defects shall be limited to small burls, tight knots less than 1/4-inch diameter, and not loose or projecting through to the opposite surface. Ash, when used, shall be white, second growth, straight grained, with not more than 17 growth rings per inch. Poles shall have adequate density to provide good serviceability. The number of permissible defects shall be not more than 2 for each 18 inches of pole length, with permitted defects at least 6 inches apart. Pole shall be properly formed and shaped to fit the pike, and have sufficient rigidity and strength for pole erection. Moisture content shall not exceed 18 percent.

3.3.3.1 Style A, without guard. Style A pike shall be furnished without a guard for the sharp, projecting point.

3.3.3.2 Style B, with guard. Style B pike shall be furnished with a guard such as a sleeve, sheath, or other device to provide protection from the sharp, projecting point when the tool is not in use.

3.3.4 Class 2, fiberglass pole. Class 2, fiberglass pole shall be of rigid, high-impact resistance, fiberglass-reinforced thermosetting plastic material. The pole shall be straight; of uniform diameter; and free from any defects that might impair serviceability. It shall not crack or split when subjected to the deflection test specified in 4.4.2 and table IV.

3.3.4.1 Style A, without guard. Style A fiberglass poles shall be furnished without a guard.

3.3.4.2 Style B, with guard. Style B fiberglass poles shall be furnished with a guard as specified in 3.3.3.2.

3.4 Type II, reversible pike.

3.4.1 Type II, reversible pike shall be of tempered steel with spike-shaped tip. It shall securely lock into operating position in a ferrule-type holder, and shall be reversible in the holder to provide protection from the tip when not in use. Locking of pike and holder shall be accomplished by means of a spring-loaded-type, steel plunger permanently staked in place in the pike to mate in a hole in the ferrule extension. Unless otherwise specified (see 6.1), the tip of the pike shall be screw-type. The pike shall be similar to, and of the length specified in figure 2.



Source: https://assist.dla.mil -- Downloaded: 202610-26T12:39Z
Check the source to verify that this is the current version before use.

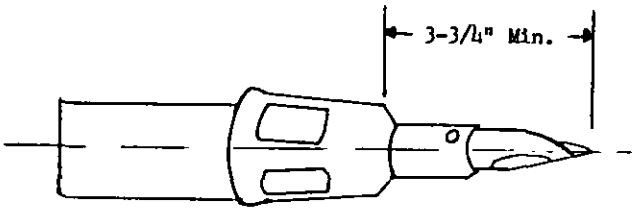



Figure 2. Type II, reversible pike - screw-type tip.

3.4.2 Ferrule. A steel; aluminum alloy; bronze; or malleable iron ferrule shall be securely fitted on the pike end of the pole and held in place by means of a headed rivet(s). It shall be extension-type ferrule for holding reversible pike.

3.4.3 Class 1, wood pole. Class 1, wood poles shall be furnished as specified in 3.3.3.

3.4.3 Class 2, fiberglass pole. Class 2 fiberglass poles shall be furnished as specified in 3.3.4.

3.5 Finish. The pole shall be smoothly finished and free from cracks or splinters. Wood poles and all metal parts shall be treated, painted, or lacquered, as applicable, in accordance with the manufacturer's standard practice.

3.6 Identification marking. The pike poles shall be marked in a plain and permanent manner with the manufacturer's name, or with a trademark of such known character that the source of manufacture may be readily determined.

3.7 Workmanship. Workmanship shall be of the highest grade throughout in accordance with good commercial practice, and free from defects that may affect the serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Inspection of materials and components. In accordance with 4.1, the supplier is responsible for insuring that materials and components used were manufactured, tested and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified herein, or, if none, in accordance with this specification.

4.2 Sampling procedures. Sampling procedures shall be in accordance with MIL-STD-105. Data for sampling shall be as stated in table II.

Table II. Sampling data

| Category | Sample unit | Inspection level | Acceptable quality level | AQL expressed in terms of | Reference |
|---|---|---|---|---|---|
| Visual examination | 1 ea. | II | 4.0 | Defects per hundred units | 4.3.1 |
| Dimensional examination | 1 ea. | S-3 | 2.5 | Defects per hundred units | 4.3.2 |
| Testing | 1 ea. | S-3 | 2.5 | Defects per hundred units | 4.4 |



Source: https://assist.dla.mil -- Downloaded: 202640-26T12:39Z
Check the source to verify that this is the currenversion before use.

4.3 Examination.

4.3.1 Visual examination. Each sample unit shall be examined for any nonconformance in design, material, finish, marking, and workmanship. Defects are listed in table III.

Table III. Classification of defects

| Examine | Defect | Major | Minor |
|---|---|---|---|
| Design and construction | Type, class, and style not as specified. | X | |
| | Not of dimensions specified. | X | |
| | Components missing, or defective. | X | |
| | Tangs and ferrules not securely affixed. | X | |
| | Not of material specified. | X | |
| | Not furnished with guard when specified. | | X |
| Marking | Manufacturer's name or trademark missing, illegible, incorrect, not permanently marked. | | X |
| Finish | Not finished as specified. | | X |
| Workmanship | Not in accordance with good commercial practice. | X | |

4.3.2 Dimensional examination. Each sample unit shall be examined for any nonconformance with dimensional requirements.

4.4 Testing.

4.4.1 Moisture content of wood poles. Each sample pike with wood pole shall be tested to verify compliance with the moisture content requirement of 3.3.3. An electrical moisture meter or other equally suitable method shall be used to determine moisture content.

4.4.2 Deflection test for fiberglass poles. Fiberglass poles shall be subjected to the deflection test specified in table IV, and illustrated by figure 3. (This is not intended to be a destructive test, but to determine that pole will not "buckle" excessively, crack, or split.)

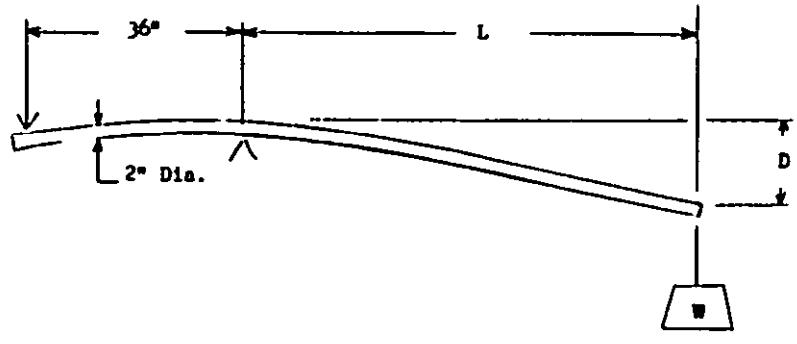



Figure 3. Deflection test.

Table IV. Deflection test.

| Pole length | Load W | Arm L | Moment Inch-Pound | Deflection D |
|---|---|---|---|---|
| Feet | Pounds | Inches | | Inches |
| 10 | 50 | 72 | 3600 | 5-1/2 |
| 12 | 37-1/2 | 96 | 3600 | 8-3/4 |
| 14 | 30 | 120 | 3600 | 12-5/8 |
| 16 | 25 | 144 | 3600 | 17-1/4 |

4.5 Inspection of preparation for delivery. Preservation, packing, and marking shall be inspected in accordance with PPP-P-40 to verify compliance with the requirements of section 5.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging, and packing. Unless otherwise specified (see 6.1), the pike poles shall be preserved, packaged, and packed in accordance with PPP-P-40.

5.2 Marking.

5.2.1 Civil agencies. In addition to any special markings required by the contract or order, the unit packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.2.2 Military activities. In addition to any special markings required by the contract or order, the unit packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number and date of this specification.
(b) Type, class, and style required (see 1.2.1).
(c) Length of pole required (see 1.2.2 and table I).
(d) Specify whether plain or screw-type pike tip required (see 3.3.1).
(e) Specify if screw-type pike tip is not desired (see 3.4.1).
(f) Specify preservation, packaging, and packing, if different (see 5.1).



GSA DC 70-12553

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.

GENERAL SERVICES ADMINISTRATION - FEDERAL SUPPLY SERVICE

# SPECIFICATION COMMENT SHEET

BUDGET BUREAU NO. 29-R0175

## INSTRUCTIONS

This form provides a way for users of this specification to inform the originator of problems encountered in its use. It is not to be used to request changes to accommodate proprietary features. All comments will be considered and appreciated, but please do not expect a reply. To comment: detach, complete, and mail to: GSA, FSS, Stdzn. Div. (FMSK), Wash., D.C. 20406.

NOTE: Comments on this form do not constitute or imply authorization to waive any part of the document or serve to amend contractual requirements.

1. SPECIFICATION GGG-P-00335a(GSA-FSS)
PIKE POLE

| 2. CONTRACT NO. *(If any)* | 3. QUANTITY ON CONTRACT *(Optional)* | 4. DOLLAR VALUE *(Optional)* |
|---|---|---|
| | | |

5. GENERAL NATURE OF PROBLEM *(e.g., inspection difficulties, manufacturers unable to meet tolerances, containers collapse under normal warehousing conditions, etc.)*

6. SPECIFIC REQUIREMENTS AFFECTED *(Include paragraph number and lines of wording)*

7. SPECIFIC PROBLEMS *(e.g. tests in 4.2.2 will not assure that the battery will last required time; temperature ranges in table 2 do not conform to commercially available items.)*

8. RECOMMENDATIONS

| 9. NAME OF MANUFACTURER, ASSOCIATION, GOVT., AGENCY, ETC. | 10. ADDRESS *(Number, Street, City, State and Zip Code)* |
|---|---|
| | |

| 11. NAME AND TITLE OF SUBMITTER | 12. DATE |
|---|---|
| | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:39Z
Check the source to verify that this is the current version before use.