
FED. SUP CLASS
2330

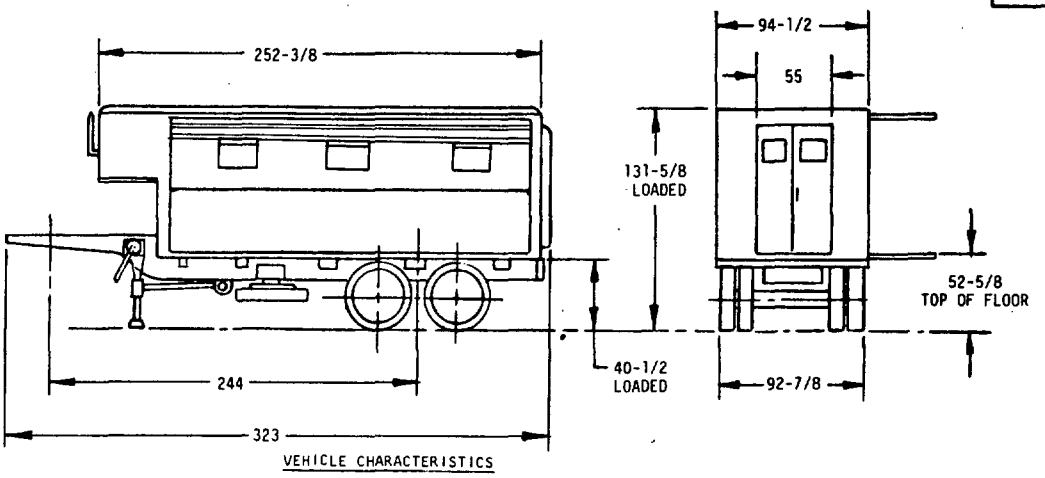

VEHICLE CHARACTERISTICS

PRIME MOVER:
TRUCK TRACTOR, 5 TON, 6 X 6 M52 OR M818

CURB WEIGHT: 13080 LBS

WEIGHT DISTRIBUTION:

KING PIN	3785 LBS
AXLE	9295 LBS
GVW	13,080 LBS

MAXIMUM WEIGHT: INCLUDING BODY AND WITH PAYLOAD EVENLY DISTRIBUTED.

	LOADED
PAYLOAD	12,000
KING PIN	7359
AXLE	17721
TOTAL	25080 LBS

(REFERENCED WEIGHTS ARE FOR INFORMATION ONLY)

GENERAL:
THE M447 SEMITRAILER IS DESIGNED TO HOUSE MAINTENANCE SHOP SETS, TOOLS, OR OTHER SUPPLIES USED TO MAINTAIN AND REPAIR MILITARY EQUIPMENT IN THE FIELD. IT HAS FOLDING SIDE VAN BODY MOUNTED ON THE M295A1 CHASSIS- MS53020. THE BODY FRAMING HAS AN INSULATED STEEL STRUCTURE WITH ALUMINUM SKINS ON THE OUTSIDE AND ALUMINUM CLAD PLYWOOD PANELS ON THE INSIDE. INTERFACE PROVISIONS ARE PROVIDED FOR TWO 60,000 BTU MULTIFUEL LOCATED IN THE FRONT BONNET WHICH EXTENDS OVER THE STORAGE COMPARTMENT. AN ALUMINUM EXTRUSION BOARD FLOOR, COVERED WITH NONSKID PAINT, PROVIDES HEAT DUCTS IN THE VAN BODY FLOOR AND LOWER SIDE DOORS. THIS CONFIGURATION PROVIDES A HOT AIR HEATING SYSTEM. PROTECTION FROM THE WEATHER IS ACHIEVED WHEN WEATHER PROOF CANVAS SIDE CURTAINS ARE ATTACHED IN THE EXPANDED PANEL POSITION. THE VAN BODY EXPANDS TO APPROXIMATELY TWICE THE VOLUME IT ENCLOSES WHEN RETRACTED. IT IS EQUIPPED WITH ELECTRIC LIGHTS AND RECEPTACLES, STABILIZING JACKS, AND ALUMINUM LADDERS.

ELECTRICAL SYSTEM: INST'N 8758754
POTENTIAL, 24 VOLTS
60,000 BTU HEATING UNIT, 2
POWER CABLE REEL ASSY. 7045796

REFLECTORS: 4, RED, MS35387-1
4, AMBER MS35387-2

VEHICLE ASSEMBLY: INST'N 8736226

CHASSIS ASSEMBLY: 8358987

PINTLE: MS51335-2

AXLE: 2, 8758911

SPRINGS: 2, MAIN 7368629
2, HELPER, 8758890

WHEELS: DUAL, MS53044-5
SIZE, 7-1/2 X 20

TIRES: 9 X 20 8 PLY, MS35388-16
TREAD, DESIGN-NDCC
TUBE, MS35392-13

BRAKES: AIR/HYDRAULIC
SIZE, 15 X 3-11/32

BRAKE ASSY L H	8336701
BRAKE ASSY R H	8336702
EMERGENCY RELAY VALVE, AIR RESERVOIR	MS53004-1 7411078

MAXIMUM TOWING SPEEDS:

LOADED	20 MPH
HIGHWAY	50 MPH

CHOCK BLOCKS: 2, 10869550

LEVELING JACKS: 2, 7534672

LANDING GEAR: 11681520
ACTUATION, 2 SPEED, MANUALLY OPERATED, STROKE FULLY EXTENDED 25 INCHES

FORDING DEPTH: 44 INCHES

KING PIN:
2 INCH DIA MS53036-1

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES OF WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48090.

(B) ENTIRE STANDARD REVISED

MS PART NO.	ENGINEERING DWG NO.
MS500033-1	8736226

APPROVED 16 FEB 66 REVISED (B) 20 MAY 85

P.A. ARMY-AT Other Cust	TITLE "SEMITRAILER, VAN, SHOP, FOLDING SIDES, 6 TON, 4 WHEEL, M447	MILITARY STANDARD MS500035(AT)
PROCUREMENT SPECIFICATION MIL-S-62049	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 87 672-1 LIMITED COORDINATION PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:45Z
Check the source to verify that this is the current version before use.