INCH-POUND

MS90577A
7 November 2005
SUPERSEDING
MS90577
22 August 1968


DETAIL SPECIFICATION SHEET

ADAPTER, CONNECTOR, SERIES UHF TO SERIES BNC, TYPE UG-273/U

Inactive for new design 15 June 1999

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-27434.

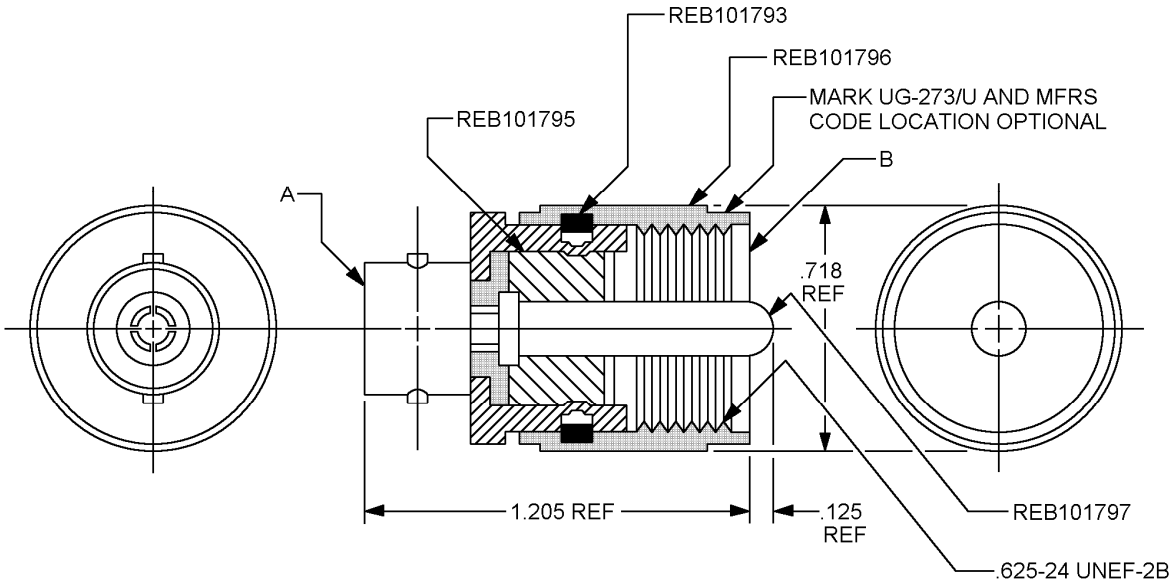

Inches	mm
.125	3.17
.718	18.24
1.205	30.61

Reference	Series	Contact
A	BNC	Socket
B	UHF	Pin

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Series BNC socket contact interface to be in accordance with MIL-STD-348.

FIGURE 1. Type UG-273/U Connector.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:40Z
Check the source to verify that this is the current version before use.

Dimensions and configuration: In accordance with Figure 1, MIL-STD-348 for BNC socket contact interface and the following drawings.

REB101792	Insulator
REB101793	Snap ring
REB101794	Body
REB101795	Insulator
REB101796	Coupling nut
REB101797	Contact

Impedance: 50 Ohms.

Frequency range: 500 MHz, maximum.

Voltage rating: 500 volts rms, maximum at 60 Hz.

Dielectric withstanding voltage: 3,000 volts, rms.

Corrosion: Method 101 of MIL-STD-202 test condition B.

Finish: Center contact. The male pin shall be plated to a minimum gold thickness of 50 micro inches (1.27μm) in accordance with ASTM B488, type II, Code C, class 1.27, over 50 micro inches (1.27μm) minimum of nickel in accordance with SAE-AMS-QQ-N-290, class 1, measured anywhere along the mating surface, for all series. The socket contact shall be plated to a minimum of 50 micro inches (1.27 μm) of gold in accordance with ASTM B488, type II, Code C, class 1.27, over 50 micro inches (1.27 μm) minimum of nickel in accordance with SAE-AMS-QQ-N-290, class 1, including the I.D., measured at a depth of .040 inch minimum. The plating on non-significant surfaces in the I.D. shall be of sufficient thickness to ensure plating continuity and uniform utility and protection. This plating may consist of an underplate only. A silver underplate shall not be permitted.

Finish: All other parts shall be silver plated to a minimum thickness of 0.0002 inches (0.005 mm) in accordance with ASTM B700.

Part or Identifying Number (PIN): MS90577-273.

Referenced documents. In addition to MIL-DTL-27434, this document references the following:

MIL-STD-202
MIL-STD-348
ASTM B488
SAE-AMS-QQ-N-290
ASTM B700
REB101792
REB101793
REB101794
REB101795
REB101796
REB101797

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:40Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy – EC
Air Force - 11
DLA – CC

Preparing activity:
DLA - CC

(Project 5935-4748-000)

Review activities:
Army – AR, MI
Navy – AS, CG, MC, OS
Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil .

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:40Z
Check the source to verify that this is the current version before use.