FED SUP CLASS
5315

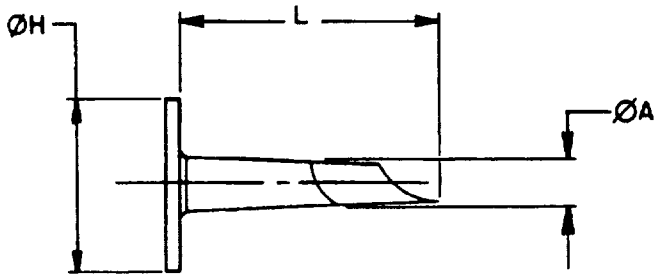


TABLE I DASH NUMBERS AND DIMENSIONS

TACK, CUT							
DASH NUMBER							
STEEL BLUED	STEEL ZINC COATED	COPPER	COMM DES	ØA	ØH (APPROX)	L ± 1/32	NO/LB (APPROX)
1			2	046	156	1/4	7390
2		13	3	049	171	3/8	2286 1/ 2820 1/
3			4	054	187	7/16	1732
4	9	14	6	058	187	1/2	1588 1/ 1760 2/ 1570 3/
5			8	062	218	9/16	1400
6	10	15	10	064	250	5/8	1178 1/ 1200 2/ 1010 3/
7	11	16	14	069	281	3/4	901 1/ 800 2/ 720 3/
8	12	17	18	078	281	7/8	665 1/ 640 2/ 560 3/
		18	22	083	.312	1	430

1/ STEEL, BLUED
2/ STEEL, ZINC COATED
3/ COPPER

REVIEWER ACTIVITIES: CIVIL AGENCIES COORDINATING ACTIVITIES
ARMY-CE,ME
NAVY-SA
AIR FORCE-82
GSA-FSS

USER ACTIVITIES
ARMY-AV,MI
NAVY-AS,MC,SH

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited
This military standard is approved for use by all Departments and Agencies of the Department of Defense
Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

AMSC N/A

APPROVED 18 DEC 62
REVISED (A) 25 JAN 88

(A) ENTIRE STANDARD REVISED

PA ARMY - AR Other Cust NAVY - YD AIR FORCE-99	INTERNATIONAL INTEREST	TITLE TACK, CUT	MILITARY STANDARD MS90722
PROCUREMENT SPECIFICATION FF-T-1813	SUPERSEDES		PAGE 1 OF 2

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5315 - 0429

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:40Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5315

REQUIREMENTS:

1 MATERIAL CUT TACK SHALL BE MANUFACTURED FROM STEEL OR COPPER IN ACCORDANCE WITH PROCUREMENT SPECIFICATION

2 CHARACTERISTICS CUT TACK SHALL HAVE FLAT HEAD AND SIDE POINT, IN ACCORDANCE WITH PROCUREMENT SPECIFICATION

3 PROTECTIVE COATING AND SURFACE TREATMENT CUT TACK SHALL BE BLUED IN ACCORDANCE WITH PROCUREMENT SPECIFICATION OR ZINC COATED IN ACCORDANCE WITH ASTM B633, TYPE II, CLASS FE/ZN13, LUSTER BRIGHT

4 PART NUMBER THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I

EXAMPLE MS90722-10
- DASH NUMBER
- BASIC MS NUMBER

MS90722-10 INDICATES- TACK, COMM. DES 10, 5/8 LONG, STEEL, ZINC COATED

NOTES

1 ALL DIMENSIONS ARE IN INCHES

2 IN THE EVENT OF CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE

3 REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN

APPROVED 18 DEC 62 REVISED (A) FOR CHANGES SEE PAGES 1 AND 2

REVIEWER ACTIVITIES (MIL-AGENCIES COORDINATING ACTIVITIES) ARMY-CE,ME GSA-FSS NAVY-SA AIR FORCE-82

LSER ACTIVITIES ARMY-AV, MI NAVY-AS,MC,SN

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

PA	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
ARMY-AR		TACK, CUT	MS90722
Other Cust NAVY - YD AIR FORCE-99			
PROCUREMENT SPECIFICATION FF-T-1813	SUPERSEDES		PAGE 2 OF 2

DD FORM 672-1 COORDINATED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5315-0429

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:40Z
Check the source to verify that this is the current version before use.