


FED. SUP CLASS
5975

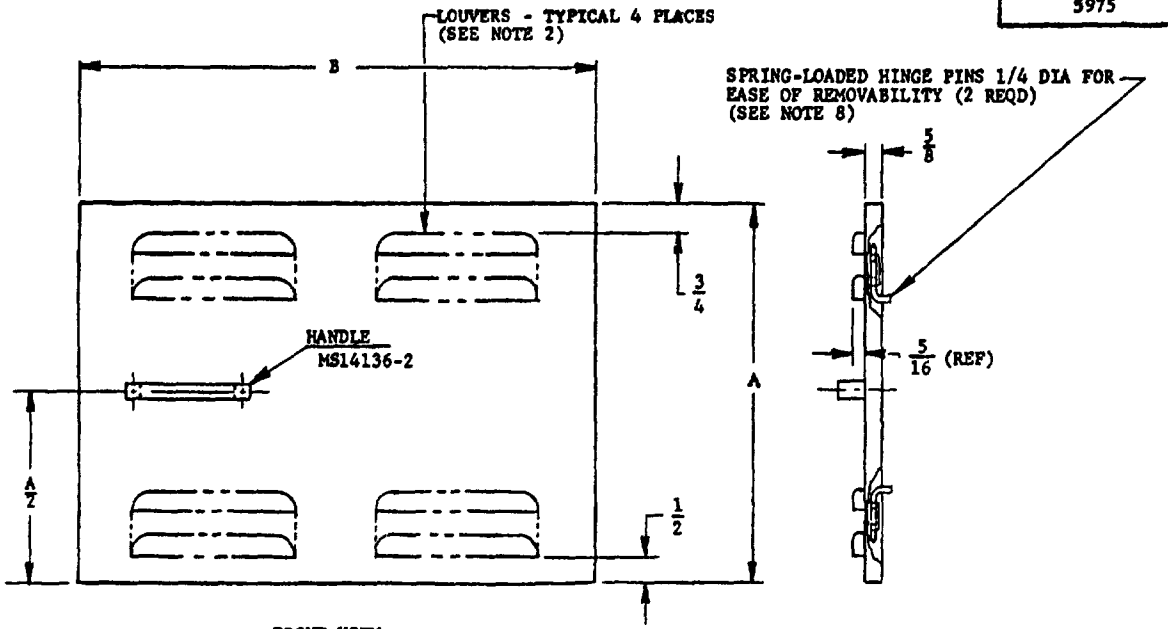


FRONT VIEW

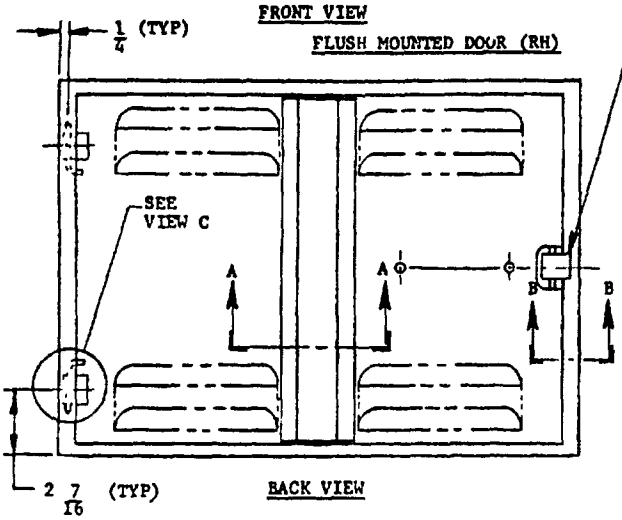


BACK VIEW



SECTION B-B (TYP)



VIEW C

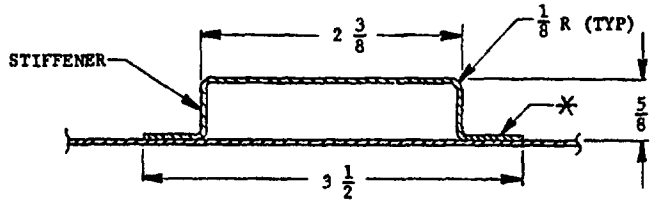

SECTION A-A

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR PID.

(F) REVISED

22 AUG 1972 REVISED (A) 8 SEP 1972 (B) 30 Nov 1973 (C) 17 JUNE 1974 (D) 31 JANUARY 1975 (E) 9 DEC 1975 (F) 18 FEB 77

P.A. NAVY - AS Other Cust	TITLE DOOR, FLUSH MOUNTED	MILITARY STANDARD MS14128(AS)
PROCUREMENT SPECIFICATION	SUPERSEDES	SHEET 1 OF 2

DD FORM 1 MAR 72 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PROJECT NO 5975-N533 PLATE NO 23071

This military standard is approved by NAVAL AIR SYSTEMS COMMAND, Department of the Navy and shall be used by that activity. All other military activities are required to employ this standard where suitable

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:35Z
Check the source to verify that this is the current version before use.

DASH NO.	PLAIN		LOUVERED	
	A	B	A	B
-1 L/R	——	——	14	19
-2 L/R	8 3/4	19	——	——
-3 L/R	——	——	14	24
-4 L/R	——	——	28	19
-5 L/R	——	——	28	24
-6 L/R	——	——	24 1/2	19
-7 L/R	——	——	70	19
-8 L/R	——	——	21	19
(F) -9 L/R	——	——	21	24

NOTES:

1. MATERIAL: 16 GAUGE STEEL.
2. DOOR WITH LOUVERS SHALL HAVE 2 DOUBLE ROWS OF LOUVERS, 6 INCHES WIDE, 3/4 INCH HIGH WITH 1 INCH SPACE BETWEEN LOUVERS. EACH LOUVER SHALL HAVE APPROXIMATELY 1 3/4 SQUARE INCHES OF OPENING.
3. FINISH: SHALL BE IN ACCORDANCE WITH MIL-STD-808 AND FED-STD-595 GREEN COLOR #24300. HARDWARE SHALL BE IN ACCORDANCE WITH QQ-P-416, TYPE II, CLASS 1, CADMIUM PLATE.
4. REMOVE ALL BURRS AND BREAK ALL SHARP EDGES.
5. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS; ±1/32.
6. EXAMPLE OF PART NUMBER:

MS14128 -1 L
- L — LEFT HAND HINGED DOOR
- -1 — SIZE DASH NUMBER
- MS14128 — BASIC PART NUMBER

7. DOOR SHALL BE OF WELDED CONSTRUCTION. ALL WELDING SHALL BE IN ACCORDANCE WITH MIL-W-8611.
8. DOOR SHALL BE SUPPLIED COMPLETELY ASSEMBLED WITH HANDLE, MS14136-2, LOCK, LATCH, LATCH PLATE, HINGE PINS, HINGE PIN BRACKETS AND ALL NECESSARY HARDWARE TO INSTALL ON VERTICAL AND TURRET PROJECTED TOP RACKS.

This military standard is approved by NAVAL AIR SYSTEMS COMMAND, Department of the Navy and shall be used by that activity. All other military activities are required to employ this standard where suitable.

P.A. NAVY - AS Other Cust	TITLE DOOR, FLUSH MOUNTED	MILITARY STANDARD MS14128(AS)
PROCUREMENT SPECIFICATION	SUPERSEDES	SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:35Z
Check the source to verify that this is the current version before use.