
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

User activities:
Army - ME

* U.S. GOVERNMENT PRINTING OFFICE: 1977-703-122/155

© ENTIRE STANDARD REVISED

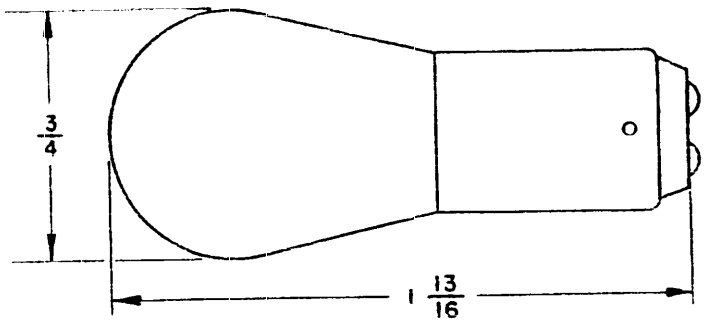

MS part number	Watts	Rated Volts	Finish	Filament type	Light Center length 1/	Hours of life (average)	Lumen output (average)	Industry No.
					Inches			
MS 15567-1	6	120	Clear	C-7A	1-1/16	1500	40	6S6DC(120)
MS 15567-2	6	130	Clear	C-7A	1-1/16	1500	40	6S6AC(130)

1/ Distance from center of light source to top of base pins.

NOTES:
1. All dimensions are in inches.
2. For design feature purposes, this standard takes precedence over procurement document referenced herein.
3. Referenced documents shall be of the issue in effect on date of invitation for bids, or request for proposal.

P.A. SHIPS
Other Cust NONE
Procurement Specification W-L-101

SUPERSEDES:

TITLE
LAMP, INCANDESCENT, S-6 BAYONET CANDELABRA, DOUBLE CONTACT

MILITARY STANDARD
MS15567

PAGE 1 OF 1

FED. SUP CLASS 6240

6240-0260

APPROVED 2 AUG. 1954 REVISED Ⓐ 27 JUN 1956 Ⓑ 14 JUL 1961 © 12 DEC 1977

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:48Z
Check the source to verify that this is the current version before use.