INCH-POUND

MS20664G
5 November 2001
SUPERSEDING
MS20664F
10 January 2001

* DETAIL SPECIFICATION SHEET

BALL END, WIRE ROPE, SWAGING, SINGLE SHANK

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification
* sheet and the issue of MIL-DTL-781 and QPL-781 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

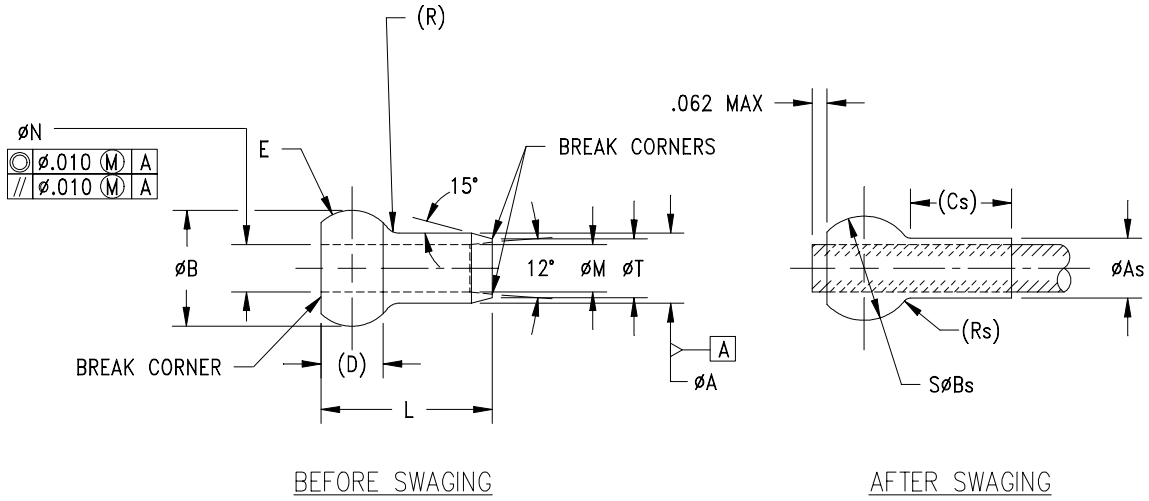


FIGURE 1. Ball end, wire rope, swaging, single shank.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:23Z
Check the source to verify that this is the current version before use.

* TABLE I. Dash numbers and dimensions.

Dash number	Wire rope diameter		Minimum breaking strength lb	∅A		∅As		∅B		$S∅B_s$ spherical		C_s reference
	Nominal	Minimum										
-2	1/16	.062	480	.132	+.000 - .004	.112	+.000 -. 003	.212	+.000 - .004	.190	+.000 - .003	.156
-3	3/32	.093	920	.168		.143		.282		.253		.234
-4	1/8	.125	2,000	.223		.190		.350		.315		.313
-5	5/32	.156	2,800	.259		.222	+.000 - .004	.424		.379	+.000 - .004	.391
-6	3/16	.187	4,200	.298	+.000 - .005	.255	+.000 -. 005	.492	+.000 - .005	.442	+.000 - .005	.469
-7	7/32	.218	5,600	.352		.302		.560		.505		.547
-8	1/4	.250	7,000	.406		.348		.629		.567		.625
-9	9/32	.281	8,000	.444		.382	+.000 -.007	.699		.632	+.000 - .007	.750
-10	5/16	.312	9,800	.480		.413		.768		.694		.813

* TABLE I. Dash numbers and dimensions - Continued.

Dash number	D reference		E radius reference	L ±.005	∅M +.010 -.000	∅N		R radius reference	Rs radius reference	∅T +.000 -.010
-2	.114	+.000 - .003	.0825	.2685	.079	.073	+.004 - .000	.028	.014	.109
-3	.152	+.000 - .004	.110	.384	.114	.104		.037	.019	.141
-4	.1895	+.000 - .005	.137	.500	.152	.139		.046	.023	.188
-5	.2275		.165	.616	.185	.169		.056	.028	.219
-6	.2645		.192	.730	.221	.201		.065	.033	.250
-7	.3025		.220	.846	1/	.233	+.005 - .000	.075	.038	.297
-8	.3395		.247	.962		.264		.084	.042	.344
-9	.3775		.275	1.078		.297		.094	.046	.375
-10	.4145		.302	1.193		.328		.103	.046	.406

1/ No tapered bellmouth on -7, -8, -9, -10.
2/ Reference dimensions are for design purposes only and are not an inspection requirement.

REQUIREMENTS:

1. Material: Material shall be in accordance with MIL-DTL-781.

2. Finish: Finish shall be in accordance with MIL-DTL-781.

3. Swage: Swage shall be in accordance with MIL-DTL-6117.


4. Tolerances: Unless otherwise specified, tolerances: decimals ± .010, angles ± 3°.

NOTES:

* 1. The part or identifying number (PIN) consists of the letters MS, the specification sheet
* number, the letter "C" for corrosion resistant steel (CRES), and a dash number taken from table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:23Z
Check the source to verify that this is the current version before use.

* EXAMPLE: MS 20664 C 2

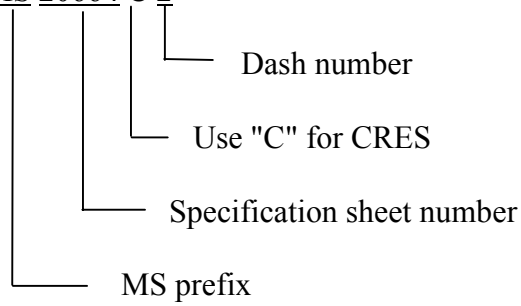

2. Dimensions are in inches.

* 3. Remove burrs and sharp edges. (See MIL-DTL-781.)

4. Interpret drawing in accordance with ASME Y14.5M.

5. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence.

6. Unless otherwise specified, issues of referenced documents are those in effect at the time of solicitation.

7. MS20664 and AN664 parts identified by the same dash numbers are universally, functionally and dimensionally interchangeable.

8. Corrosion resistant steel parts shall be used for new design and can be universally substituted for carbon and alloy steel parts as shown in table II. Carbon and alloy steel parts cannot be substituted for corrosion resistant steel parts.

9. Carbon and alloy steel parts are inactive for new design.

TABLE II. Substitution table.

MS PART NUMBERS	
Corrosion resistant steel	Carbon steel, cadmium plate
MS20664C2	MS20664-2
MS20664C3	MS20664-3
MS20664C4	MS20664-4
MS20664C5	MS20664-5
MS20664C6	MS20664-6
MS20664C7	MS20664-7
MS20664C8	MS20664-8
MS20664C9	MS20664-9
MS20664C10	MS20664-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:23Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification sheet are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
Army - CR4
Navy - AS
Air Force - 99

Reviewers:
Army - MI
Air Force - 71

Preparing activity:
DLA - GS5

(Project 1560-0014)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:23Z
Check the source to verify that this is the current version before use.