
USER SYMBOLS:
REVIEWER SYMBOLS:
"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."
This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

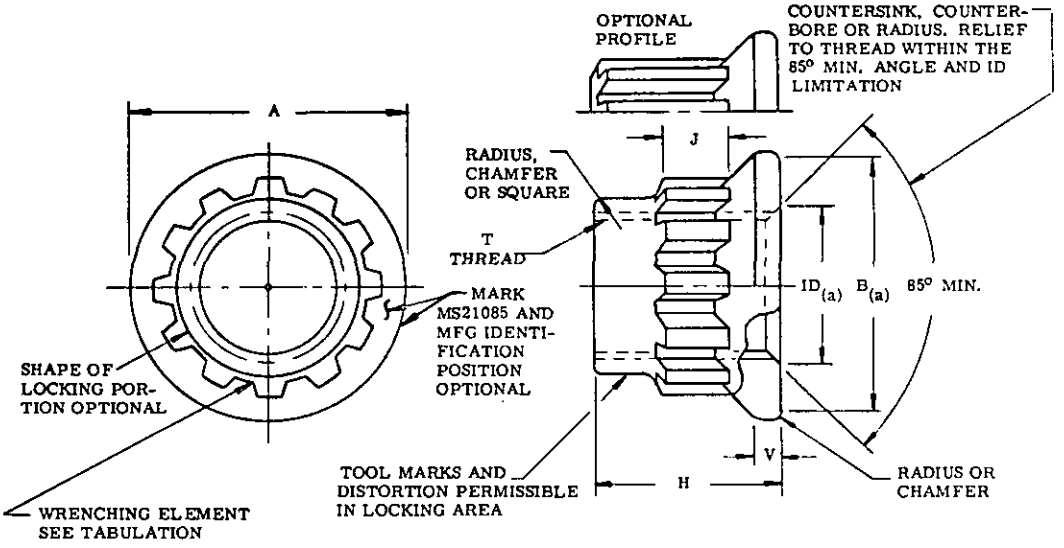

NOTES:

1. MATERIAL: ALLOY STEEL, AMS 6304, AMS6485 AND AMS6487.
2. HARDNESS: ROCKWELL C48 MAX
3. SURFACE TEXTURE: BEARING SURFACE 125 IN ACCORDANCE WITH ANSI (ASA) B46.1-1962.
4. PLATING: CADMIUM PLATE IN ACCORDANCE WITH QQ-P-416, TYPE II, CLASS 2, DRY FILM LUBRICATED NUTS IN ACCORDANCE WITH QQ-P-416, TYPE AND CLASS OPTIONAL, IF THE NUTS MEET THE SALT SPRAY REQUIREMENTS OF QQ-P-416, TYPE II.
5. (A) LUBRICANT: LUBRICANT APPROVED IN ACCORDANCE WITH PROCUREMENT SPECIFICATION. LUBRICANTS, EXCEPT DRY FILM LUBRICANTS, SHALL BE SOLUBLE IN THE CLEANER SPECIFIED IN THE PROCUREMENT SPECIFICATION. ~~FOR USAF APPLICATIONS, NUTS TREATED WITH DRY FILM LUBRICANTS SHALL NOT BE UTILIZED IN INTEGRAL FUEL TANKS.~~
6. THREADS: MIL-S-8879 BEFORE LUBRICATION.
7. WRENCHING ELEMENT: PER MS33787. DRIVERS PER MIL-W-8982.
8. PERPENDICULARITY: BEARING SURFACE SHALL BE NORMAL WITH PITCH DIAMETER OF THREAD WITHIN X WHEN CHECKED IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.
9. DIMENSIONS IN INCHES: DIMENSIONS APPLY BEFORE LUBRICATION
10. DESIGN USAGE INFORMATION: THESE NUTS ARE DESIGNED TO BE USED WITH MS21296 BOLTS AND MS21299 WASHERS.

EXAMPLE OF PART NUMBERS:

MS21085-04 = .2500-28 NUT, CADMIUM PLATED, SOLUBLE LUBRICANT.
MS21085L04 = .2500-28 NUT, CADMIUM PLATED, DRY FILM LUBRICATED.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCE DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

(A) DENOTES CHANGES

APPROVED 28 JAN 1972 REVISED (A) 15 MARCH 1978

P.A. NAVY - AS Other Cust USAF - 11 ARMY - AV	TITLE NUT, SELF-LOCKING, STEEL, 260 KSI Ftu, 450°F., FLANGED, MS33787 WRENCHING ELEMENT	MILITARY STANDARD MS21085
PROCUREMENT SPECIFICATION MIL-N-8984	SUPERSEDES:	SHEET 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:26Z
Check the source to verify that this is the current version before use.

DASH NUMBER		NOMINAL SIZE	"T" THREAD	MS33787 ELEMENT NUMBER	A	$B_{(a)}$	$ID_{(a)}$	
NON-DRY LUB	DRY LUB				MAX	MIN	MAX	MIN
03	L03	NO. 10	.1900-32UNJF-3B	8	.377	.337	.220	.190
04	L04	1/4	.2500-28UNJF-3B	10	.481	.441	.280	.250
05	L05	5/16	.3125-24UNJF-3B	12	.588	.548	.342	.312
06	L06	3/8	.3750-24UNJF-3B	16	.701	.661	.405	.375
07	L07	7/16	.4375-20UNJF-3B	18	.821	.771	.473	.438
08	L08	1/2	.5000-20UNJF-3B	20	.933	.883	.535	.500
09	L09	9/16	.5625-18UNJF-3B	24	1.041	.991	.597	.562
10	L10	5/8	.6250-18UNJF-3B	26	1.154	1.104	.660	.625
12	L12	3/4	.7500-16UNJF-3B	30	1.375	1.325	.785	.750
14	L14	7/8	.8750-14UNJF-3B	36	1.592	1.542	.910	.875
16	L16	1	1.0000-12UNJF-3B	40	1.810	1.760	1.035	1.000

DASH NUMBER		H	V	J	X	ULTIMATE AXIAL STRENGTH LB MIN (b)	APPROX WEIGHT LB/100
NON-DRY LUB	DRY LUB	MAX	MIN	MIN			
03	L03	.250	.025	.095	.003	5,640	.30
04	L04	.315	.033	.125	.003	10,100	.59
05	L05	.405	.041	.156	.003	16,000	1.00
06	L06	.490	.049	.188	.003	24,700	1.90
07	L07	.570	.057	.219	.003	33,500	2.70
08	L08	.650	.065	.250	.003	44,600	4.40
09	L09	.730	.073	.281	.004	56,600	6.20
10	L10	.810	.081	.313	.004	70,800	8.70
12	L12	.980	.098	.375	.004	103,000	14.00
14	L14	1.140	.114	.438	.005	140,000	23.00
16	L16	1.300	.130	.500	.006	183,000	33.00

(a) MINIMUM BEARING AREA BASED ON A BEARING STRESS OF 115 KSI.

(b) AXIAL STRENGTH DETERMINED FROM FORMULA Wa = FtuA WHERE A IS THE CROSS SECTIONAL AREA, IN SQUARE INCHES, BASED ON THE MAXIMUM PITCH DIAMETER OF BOLT THREAD, Ftu IS 260 KSI AND Wa IS THE AXIAL STRENGTH IN POUNDS.

USER SYMBOLS:
REVIEWER SYMBOLS:
"Review/user interpolation is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."
This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 28 JAN 1972 REVISED A FOR CHANGES SEE SHEETS 1

P.A. NAVY - AS Other Cust USAF - 11 ARMY - AV	TITLE NUT, SELF-LOCKING, STEEL, 260 KSI Ftu, 450°F., FLANGED, MS33787 WRENCHING ELEMENT	MILITARY STANDARD MS21085
PROCUREMENT SPECIFICATION MIL-N-8984	SUPERSEDES:	SHEET 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:26Z
Check the source to verify that this is the current version before use.