
FED. SUP CLASS
4730

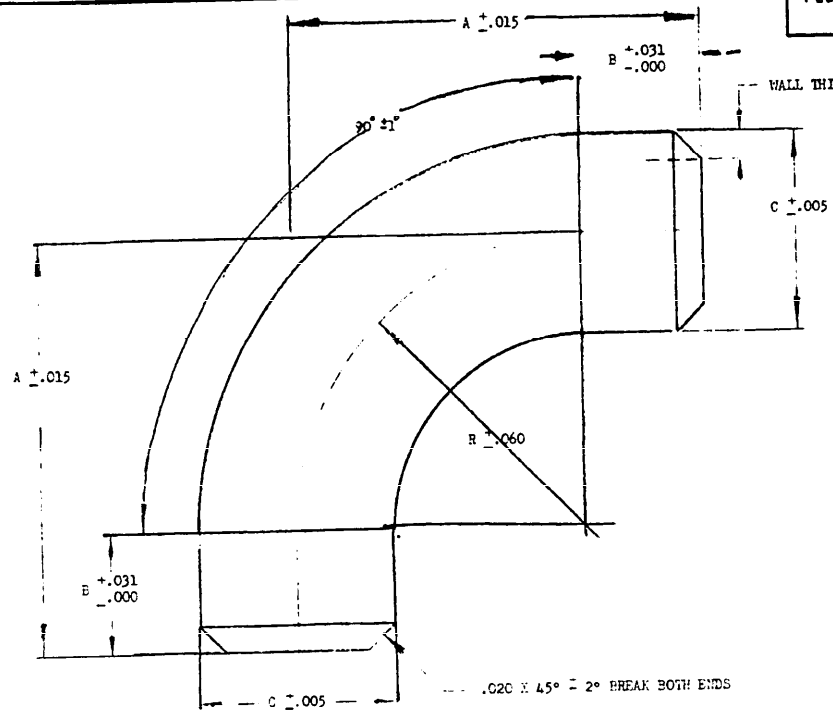

PART NUMBER MS27234	A	B	C	R	T	X(a)
-4	.531	.156	.245	.375	.035	.010
-5	.594	.156	.307	.438	.049	.012
-6	.656	.156	.370	.500	.049	.014
-8	.656	.156	.495	.500	.065	.016
-10	.781	.156	.620	.625	.065	.018
-12	1.094	.250	.745	.844	.065	.020
-16	1.219	.250	.995	.969	.065	.022
-20	1.438	.250	1.245	1.188	.065	.024
-24	1.625	.250	1.495	1.375	.083	.026
-32	2.000	.250	1.995	1.750	.083	.028
-40	2.312	.250	2.370	2.062	.095	.030
-48	2.562	.250	2.995	2.312	.095	.030

(a) FACE OF TUBE MUST BE PERPENDICULAR TO CENTERLINE OF TUBE WITHIN "X" TIR.

(A) MATERIAL:
SIZE 4 THRU 6 - STEEL, 1010 COLD DRAWN, AMS 5050 OR AMS 5053.
SIZE 8 THRU .48 - ALUMINUM ALLOY 6061, T6, TYPE 1, MIL-T-7081/6.

FINISH: NONE

MINIMUM WALL THICKNESS AT BEND SHALL BE 80% OF ORIGINAL THICKNESS.

OVALITY SHALL NOT EXCEED 5% OF NOMINAL TUBING OUTSIDE DIAMETER.

REMOVE ALL BURRS AND SLIVERS.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, RADIUS OR BREAK ALL CORNERS $\frac{.010}{.005}$

THIS ITEM SHALL NOT BE PROCURED FOR STOCKING PURPOSES.

FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID

APPROVED 6 Aug 1964 REVISED (A) 16 Jun 69

User activities: Army - ME

Review activities: USAF - 82, Army - AV, MI, Navy - AS

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. USAF - 82	TITLE	MILITARY STANDARD
Other Cust: Army - AV, Navy - AS	ELBOW TUBE, 90° (USED ON MS27224 AND MS27228 HOSE TO TUBE ADAPTERS)	MS27234
PROCUREMENT SPECIFICATION: MIL-A-5070	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:19Z
Check the source to verify that this is the current version before use.