



FED. SUP CLASS
1670



SECTION A-A

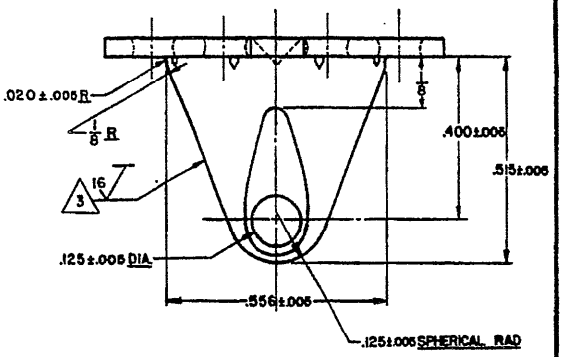

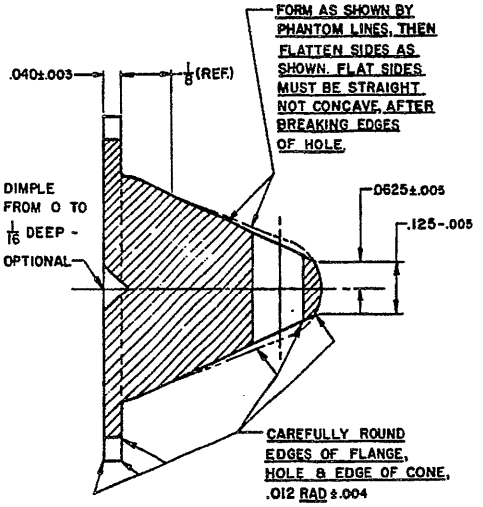

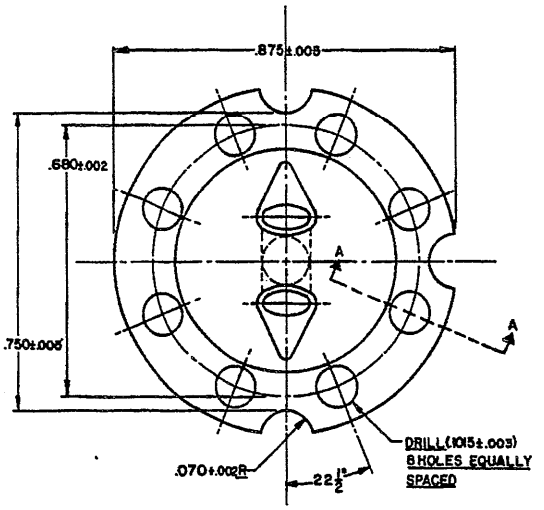

DASH NO.	MATERIAL
-1	SEE NOTE 1
-2	SEE NOTE 2

MS27763-2 IS FOR AIRCRAFT DECELERATION PARACHUTE APPLICATIONS

NOTES:

1. MATERIAL: BRASS, COMP 360, 1/2 HARD, QQ-B-626.
2. MATERIAL: STEEL BAR, CORROSION RESISTING, TYPE 303SE QQ-S-764.
3. SURFACE ROUGHNESS IN ACCORDANCE WITH ANS 46.1.
4. DIMENSIONS SHALL BE IN INCHES UNLESS OTHERWISE SPECIFIED. TOLERANCES: FRACTIONS ± 1/64, ANGLES ± 1°.
5. FINISH: MS27763-1 ONLY. ALL OVER WITH CHROMIUM PLATE, TYPE II, CLASS 2, QQ-C-320, EXCEPT THAT TOTAL THICKNESS OF NICKEL AND CHROME OR COPPER, NICKEL AND CHROME PLATE SHALL BE .00025 MINIMUM.
6. FOR DESIGN PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
7. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID

User activities: AS

Review activities:
USAF - 82
ARMY - GL, AV
NAVY - AS

APPROVED 24 JULY 1970 REVISED

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. USAF-82 Other Cust Army - GL Navy - AS	TITLE CONE - RELEASING, PARACHUTE PACK	MILITARY STANDARD MS 27763
PROCUREMENT SPECIFICATION MIL-H-7195	SUPERSEDES: USAF DWG. 5086152	SHEET 1 OF 1

DD FORM 1 SEP 63 672-1 (Coordinated)

EDITION OF 1 SEP 57 MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 202610-23T16:51Z
Check the source to verify that this is the current version before use.