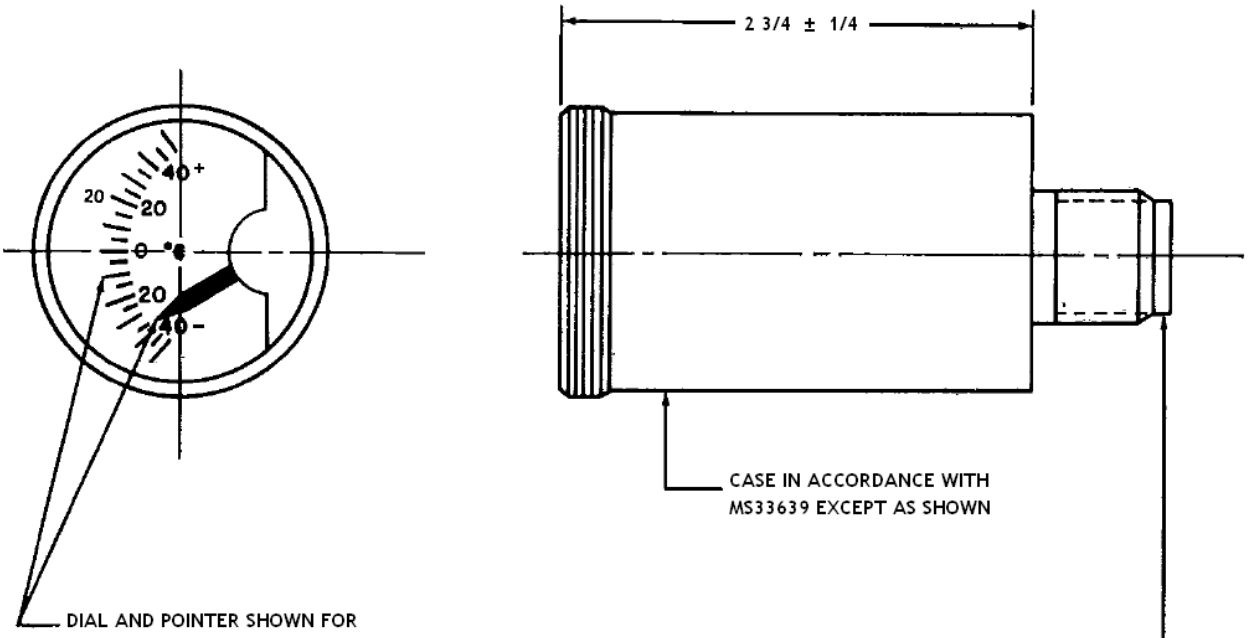


MS PART NO.	DIAL MARKINGS
MS28008-1	FLUORESCENT
MS28008-2	LUSTERLESS WHITE

B NOTES:

1. DIMENSIONS IN INCHES.
2. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENT REFERENCED HEREIN
3. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 8 JAN 1951 REVISED (A) 1 JUNE 1965 (B) 20 AUG 71

User activities: ARMY – EL, SM
Review activities: AF – 82, 11; NAVY – AS; ARMY – AV, MI, GL
This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. AIR FORCE – 82 Other Cust. NAVY – AS ARMY - EL	TITLE **INDICATOR – TEMPERATURE, MULTI-FUNCTION, ELECTRICAL RESISTANCE, SINGLE, CLAMP-MOUNTED, -50 TO +50 DEG C, 2-INCH SIZE**	**MILITARY STANDARD** **MS28008**
PROCUREMENT SPECIFICATION MIL-I-7075	SUPERSEDES AN5791	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-25T16:55Z
Check the source to verify that this is the current version before use.