This standar. . . been approved , the
Department of the Navy and is mandatory for use by that activity.
All other military activities are required to employ this standard
where suitable.

Source: https://assist.dla.mil -- Downloaded: 20260-23T13:00Z
Check the source to verify that this is the current version before use.

DD FORM 10 APR 84 672

P.A. NAVY-AS | Procurement Specification | Other Cust | International Interest

TITLE: ADAPTER FOR REAR MOUNTING, JAM NUT, MIL-C-26482 ELECTRIC CONNECTORS

SUPERSEDES:

MILITARY STANDARD

MS3184 (NAVY)


SHEET 1 OF 1


PROJECT NO. 5935-N203-03

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Ⓑ DENOTES CHANGES

Ⓑ INACTIVE FOR DESIGN AFTER 1 JULY 1982. DOCUMENT WILL BE CANCELLED AFTER 1 JULY 1984, USE MIL-C-85049/34.



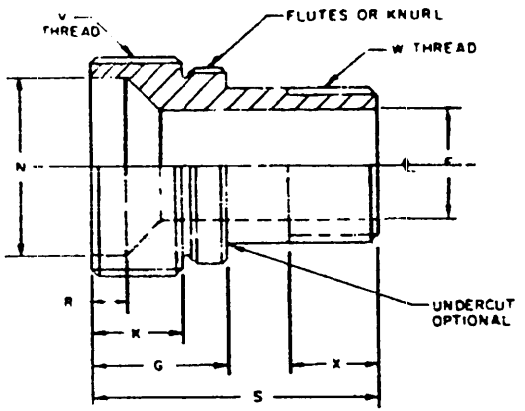


| SHELL SIZE | F +.005 -.001 DIA | G +.001 -.016 | K +.015 -.000 | N +.010 -.011 DIA | R +.016 | S MAX | V THREAD UNEF CLASS 2A | W THREAD UNEF CLASS 2A | X MIN FULL THREAD |
|---|---|---|---|---|---|---|---|---|---|
| 8 | .322 | .391 | .256 | .500 | .094 | .812 | 5/8 - 24 | 7/16 - 28 | .250 |
| 10 | .439 | | | .609 | | | 3/4 - 20 | 9/16 - 24 | |
| 12 | .564 | | | .734 | | | 7/8 - 20 | 11/16 - 24 | |
| 14 | .668 | | | .859 | | | 1 - 20 | 13/16 - 20 | |
| 16 | .793 | | | .969 | | | 1 1/8 - 18 | 15/16 - 20 | |
| 18 | .910 | | | 1.109 | | | 1 1/4 - 18 | 1 1/16 - 18 | |
| 20 | 1.025 | .422 | .302 | 1.219 | .125 | .906 | 1 3/8 - 18 | 1 3/16 - 18 | .312 |
| 22 | 1.150 | | | 1.344 | | | 1 1/2 - 18 | 1 5/16 - 18 | |
| 24 | 1.275 | | | 1.469 | | .937 | 1 5/8 - 18 | 1 7/16 - 18 | |

NOTES
1. DIMENSIONS IN INCHES
2. MATERIAL - ALUMINUM ALLOY
3. PLATING - CADMIUM PLATE, SPECIFICATION QQ-P-416, TYPE II, CLASS 2
4. REMOVE ALL BURRS AND SHARP EDGES
5. FOR USE WITH MS3114, MS3124 & MS3474 RECEPTACLES.

EXAMPLE OF PART NUMBER

MS3184 -12

MS NUMBER — SIZE

FED. SUP CLASS 5935

APPROVED 25 OCT 1966 REVISED Ⓐ 1 Apr 1971 Ⓑ 10 May 1982