... Department
... for ...
... are the

... information is current as of the date of this document
... future coordination of changes to this document, draft circulation
should be based on the information in the current DODISS

REVIEWER SYMBOLS: USER SYMBOLS:

IREMENTS ARE BASED UPON THE SEAT
E POINT AT THE CENTERLINE OF THE SEAT
TRAL POSITION.
E SPECIFICATION MIL-B-8584 FOR BRAKE
LES AND DIMENSIONS
AND THROTTLE REFERENCE POINT IS
S THE POINT AT WHICH THE PILOT'S
NGER IS IN CONTACT WITH THE FORWARD
HE CONTROL.
EDAL ADJUSTMENT SHALL BE IN INCRE-
1 INCH OR LESS.
OF CATAPULT GRIP REQUIREMENT, MAX.
THROTTLE MOVEMENT FOR AIRCRAFT
FOR CATAPULTING SHALL BE 20 INCHES
TRAL SEAT REFERENCE POINT. MAX.
THROTTLE MOVEMENT FOR NONCATAPULT
SHALL CORRESPOND TO THAT OF STICK.
BACK ANGLE AND SEAT ADJUSTMENT RE-
TS FOR EJECTION SEATS IN U.S. NAVY
MIL-S-18471 AND NAVAIR 65A136H1

S IN INCHES.

STANDARD, NOT USED AS A PART NUMBER.

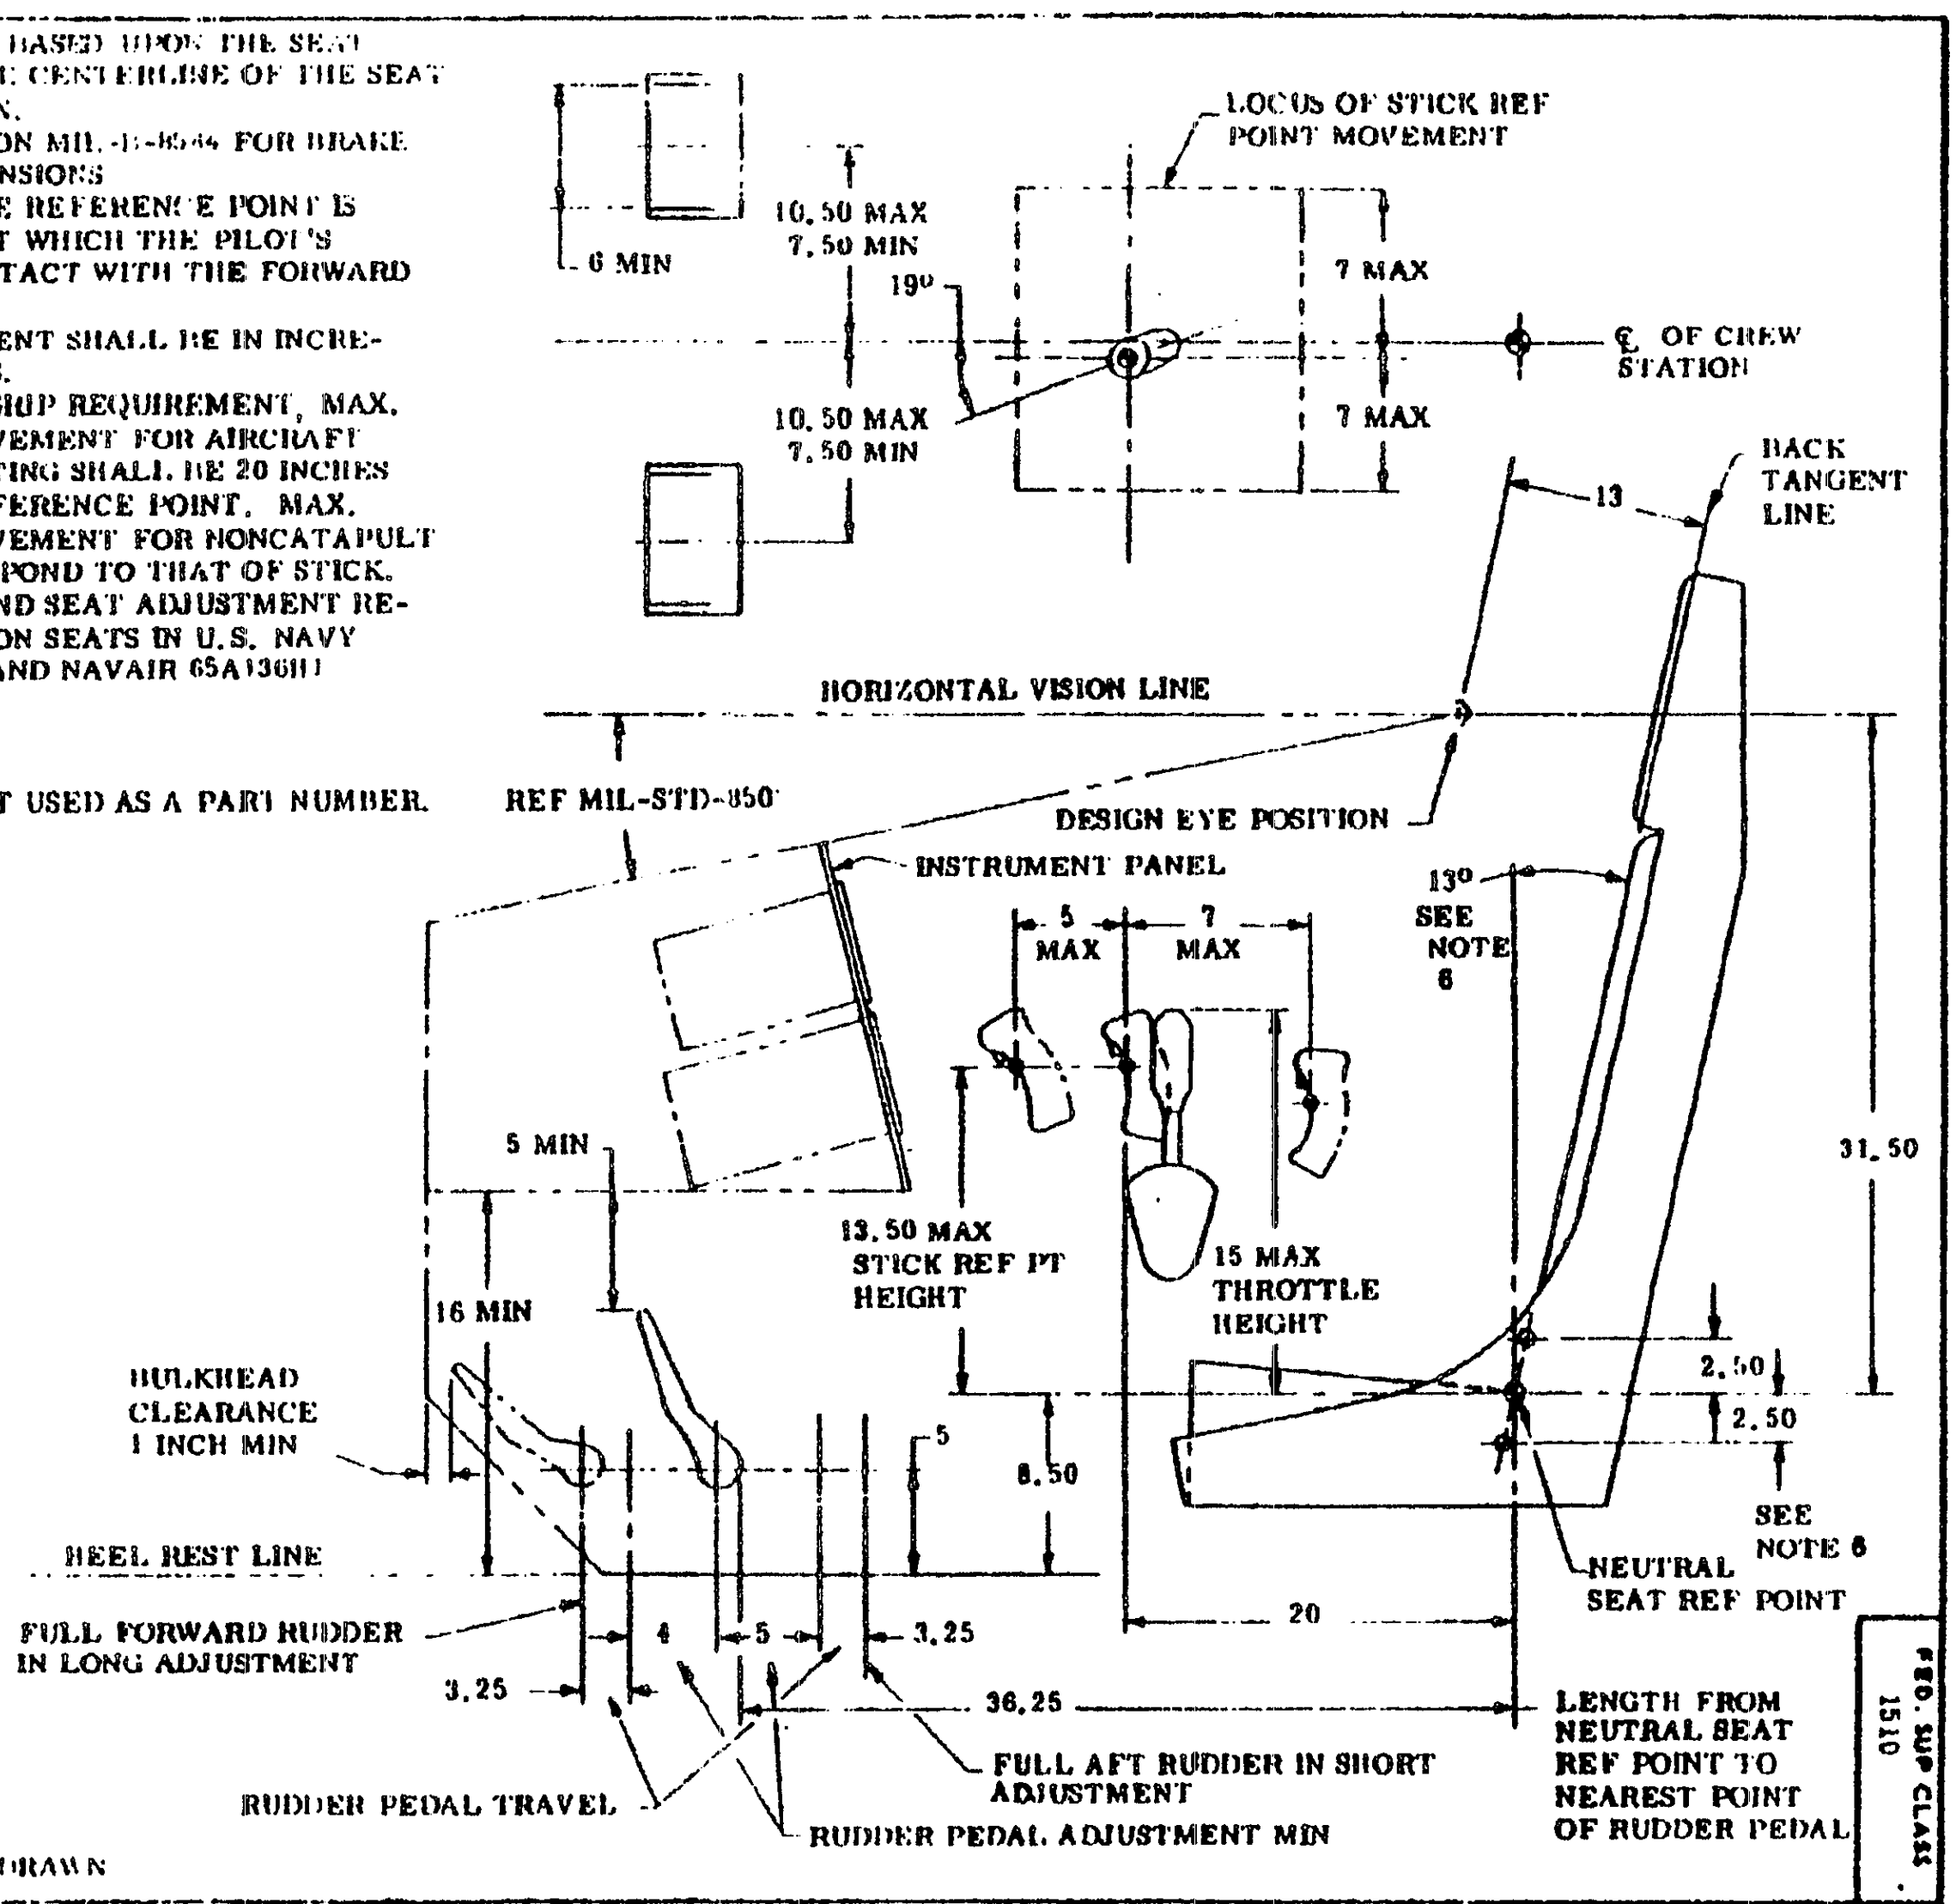

FED. SUP CLASS
1510

EVISED AND REDRAWN

REVISED (A) 5 JUN 67 (B) 2 JUN 69

Source: https://assist.dla.mil -- Downloaded: 202640-23T17:05Z
Check the source to verify that this is the current version before use.