
FED. SUP CLASS
6640

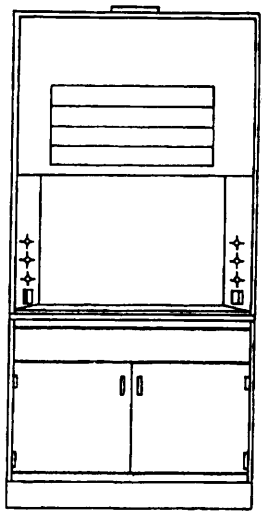

PART NUMBER	DIMENSIONS (cm) WIDTH	DEPTH	HEIGHT	NO. OF LIGHTS
MS36232-1	119.1	87.6	243.8	1
MS36232-2	149.9	87.6	243.8	2
MS36232-3	177.8	87.6	243.8	2

MATERIAL: Hood shall be made of stainless steel, including work surface and trough sink, and washdown pipe, in accordance with ASTM Specification A167, UNS designation S31600.

DESIGN: Hood shall be constructed of one-piece seamless stainless steel with covered interior corners. Hood shall include a safety washdown system, a counterbalanced safety glass sash with stainless steel frame, and 100 watt explosion-proof lights with shatter-proof globes. Light and motor switches are mounted in base panel, one 230V and two 115V outlets mounted in base panel, 2 air/gas/vacuum cocks with panel handles and collar for connection to exhaust duct.

Hood is complete with integral work surface, steel base unit and service fixtures.

Add suffix letter M to part number (MS36232-1M) for hood with integral 0.5 hp, 115V AC, 60Hz motorblower.

All electrical components shall conform to the standards of Underwriters Laboratories, Incorporated.

NOTE: Items differing from this Military Standard by minor variations in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements specified herein.

USER ACTIVITIES:

REVIEWER ACTIVITIES:

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 22 JUN 1983 REVISED

P.A. EA	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust MS 99		HOOD, FUME, LABORATORY, STAINLESS STEEL MODELS	MS36232
Procurement Specifications NONE	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NUMBER 6640-1186
STANDARD DATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:36Z
Check the source to verify that this is the current version before use.