
FED. SUP CLASS
2540

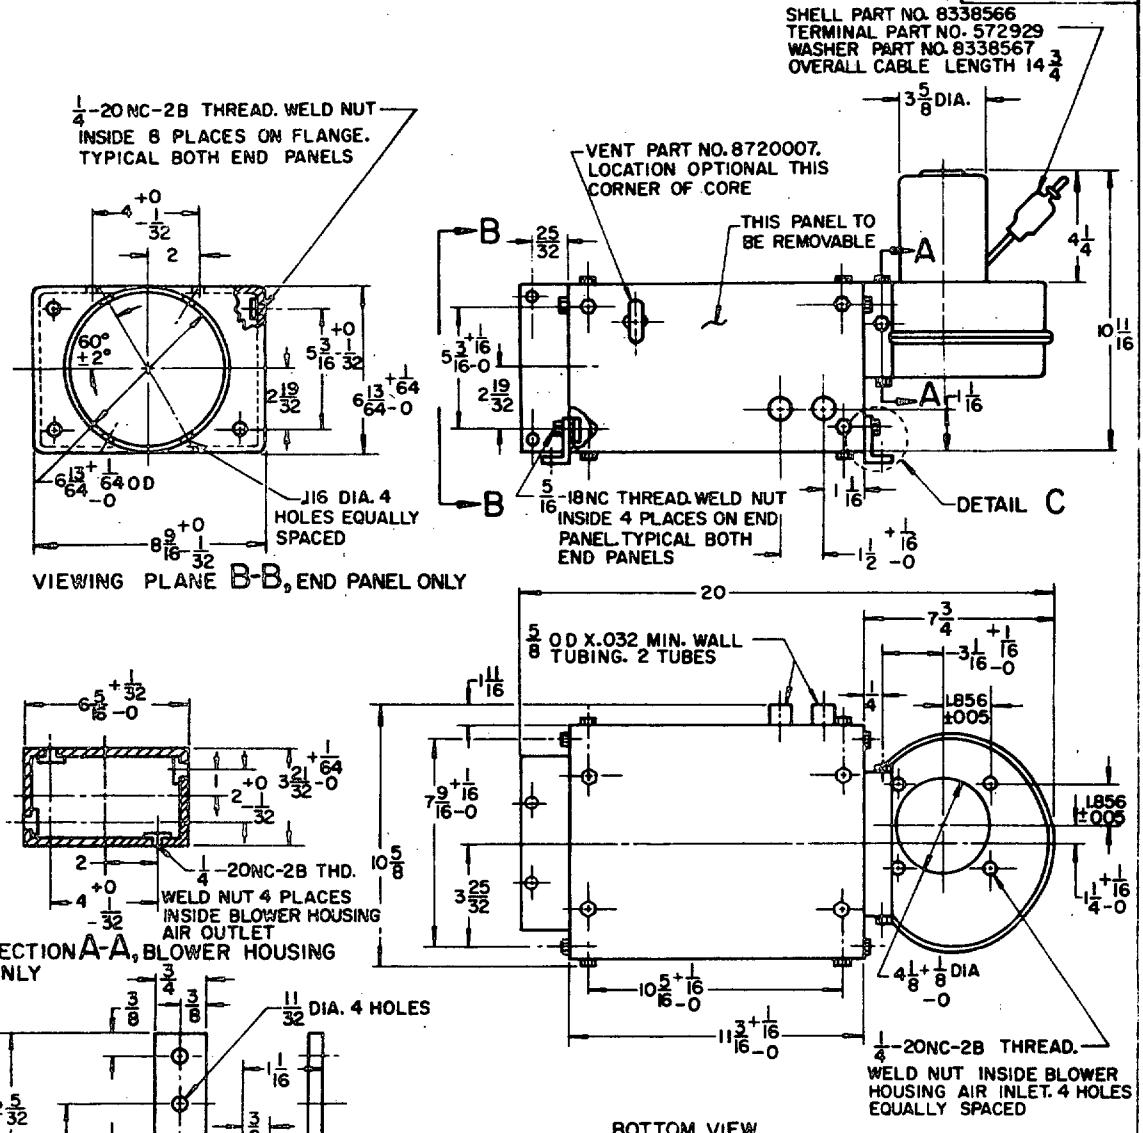

NOTES:

1. THIS HEATER SHALL CONFORM TO TYPE II, CAPACITY B OF MIL-H-3199
2. BASIC ASSEMBLY IS SHOWN. HEATER MAY BE ADAPTED TO VARIOUS CONFIGURATIONS BY REARRANGING OR INTERCHANGING END PANELS OR BLOWER HOUSING ATTACHMENT.
3. INTERNALLY MOUNTED WELD NUTS ARE TO BE USED FOR ALL FASTENERS. SIZE IS OPTIONAL UNLESS OTHERWISE SPECIFIED.
4. DIMENSIONS ARE IN INCHES, MAXIMUM, UNLESS OTHERWISE SPECIFIED.
5. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.
6. FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
7. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION AS TO FEATURES, OTHER THAN SHOWN HEREON, BY DIMENSIONS, NOTATIONS, OR REFERENCED DOCUMENTS.
8. MARKING SHALL CONSIST OF THE MS PART NUMBER AND THE MANUFACTURER'S IDENTIFICATION AND SHALL BE IN ACCORDANCE WITH MIL-STD-130.

Ⓐ ENTIRE STANDARD REVISED

MS PART NO.	FORMER DWG. NO.
MS 51326-1	8380650

P.A. ARMY-AT
Other Cust

TITLE

HEATER, VEHICULAR COMPARTMENT: LIQUID COOLANT, 30,000 BTU/HR

MILITARY STANDARD

MS51326 (AT)

PROCUREMENT SPECIFICATION: MIL-H-3199

SUPERSEDES:

SHEET 1 OF 1

DD FORM 1 SEP 57 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

APPROVED 16 MARCH 1960 REVISED Ⓐ 15 AUGUST 1966

REVIEW ACTIVITY: ARMY-ME

This standard has been approved by the U. S. Army Tank-Automotive Command, Department of the Army, and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:59Z
Check the source to verify that this is the current version before use.