NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

DD FORM 1 NOV 68 233

CUSTODIAN Navy-AS Air Force-11

PROCUREMENT SPECIFICATION NONE

MS9017(ASG)


MILITARY STANDARD


BUSHING - SCREW, SLOTTED


MS 9017(ASG)

SHEET 1 OF 1

MARK OVERSIZE IDENTIFICATION ON THIS END AS SHOWN IN TABLE



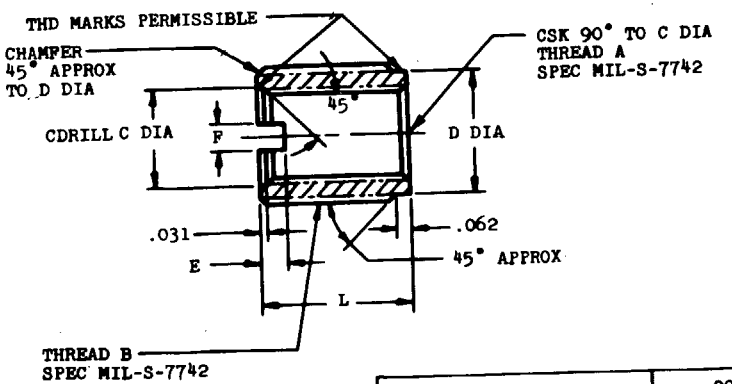



SECTION THRU THD B PROFILE

(3) .6875-16NS
MAJOR DIA = .6875 MIN
PITCH DIA = .6469-.6515
MINOR DIA = .6198-.6287

THREAD A	L	C +.010 -.000	D +.000 -.020	E	F	(4) THREAD B SIZE	MAJOR DIA	MINOR DIA MAX	STANDARD NO MARKS PD THD B	STANDARD NO MARKS PART NO.	+.003 OVERSIZE ONE MARK PD THD B	+.003 OVERSIZE ONE MARK PART NO.	+.006 OVERSIZE TWO MARKS PD THD B	+.006 OVERSIZE TWO MARKS PART NO.
.190-32NF-3B	.375	.203	.259	.090	.090	.3125-24NS	.3053-.3125	.2647	.2876-.2888	MS9017-10	.2906-.2918	MS9017-11	.2936-.2948	MS9017-12
.250-28UNF-3B	.500	.266	.373	.090	.090	.4375-20NS	.4294-.4375	.3797	.4073-.4086	MS9017-13	.4103-.4116	MS9017-14	.4133-.4146	MS9017-15
.3125-24UNF-3B	.562	.328	.436	.120	.120	.500-20NS	.4919-.5000	.4422	.4698-.4711	MS9017-16	.4728-.4741	MS9017-17	.4758-.4771	MS9017-18
.375-24UNF-3B	.625	.391	.491	.120	.120	.5625-18NS	.5538-.5625	.4983	.5289-.5304	MS9017-19	.5319-.5334	MS9017-20	.5349-.5364	MS9017-21
.4375-20UNF-3B	.688	.453	.554	.120	.120	.625-18NS	.6163-.6250	.5608	.5914-.5929	MS9017-22	.5944-.5959	MS9017-23	.5974-.5989	MS9017-24
.500-20UNF-3B	.750	.516	.607	.120	.120	.6875-16NS	.6781-.6875	.6150	.6495-.6511	MS9017-25	.6525-.6541	MS9017-26	.6555-.6571	MS9017-27
.5625-18UNF-3B	.812	.578	.670	.120	.120	.750-16NS	.7406-.7500	.6775	.7120-.7136	MS9017-28	.7150-.7166	MS9017-29	.7180-.7196	MS9017-30
.625-18UNF-3B (3) .6875-16NS	.875 .938	.641 .703	.733 .795	.120 .120	.120 .120	.8125-16NS .875-16NS	.8031-.8125 .8656-.8750	.7404 .8029	.7747-.7765 .8372-.8390	MS9017-31 MS9017-34	.7777-.7795 .8402-.8420	MS9017-32 MS9017-35	.7807-.7825 .8432-.8450	MS9017-33 MS9017-36

NOTE: (1) PITCH DIAMETERS OF THREADS SHALL BE CONCENTRIC WITHIN .005 FIR.
(2) PITCH DIAMETER TAPER FOR THD B SHALL NOT EXCEED .002 PER INCH. IF TAPERED, LARGE END SHALL BE AT CDRILL C END.
(4) MAJOR DIA IS SAME FOR STD, + .003 AND + .006 OVERSIZES; MINOR DIA INCREASES AS PER INCREMENT OF OVERSIZE.

MATERIAL: STEEL AMS 5024.

FINISH: CADMIUM PLATE AMS 2400.

SURFACE ROUGHNESS: AS 107.

BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ± 2°.

DO NOT USE UNASSIGNED PART NUMBERS.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

(A) INACTIVE FOR DESIGN AFTER 1 OCTOBER 1965. NO SUPERSEDING STANDARD.

FED. SUP CLASS 1730

APPROVED 31 Aug 54 REVISED (A) 1 Oct 65

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:09Z
Check the source to verify that this is the current version before use.