
MILITARY SPECIFICATION SHEET

BATTERY, NON-RECHARGEABLE, BA-3090/U

This specification is approved for use within Laboratory Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the battery described herein shall consist of this specification and the latest issue of MIL-B-49030(ER).

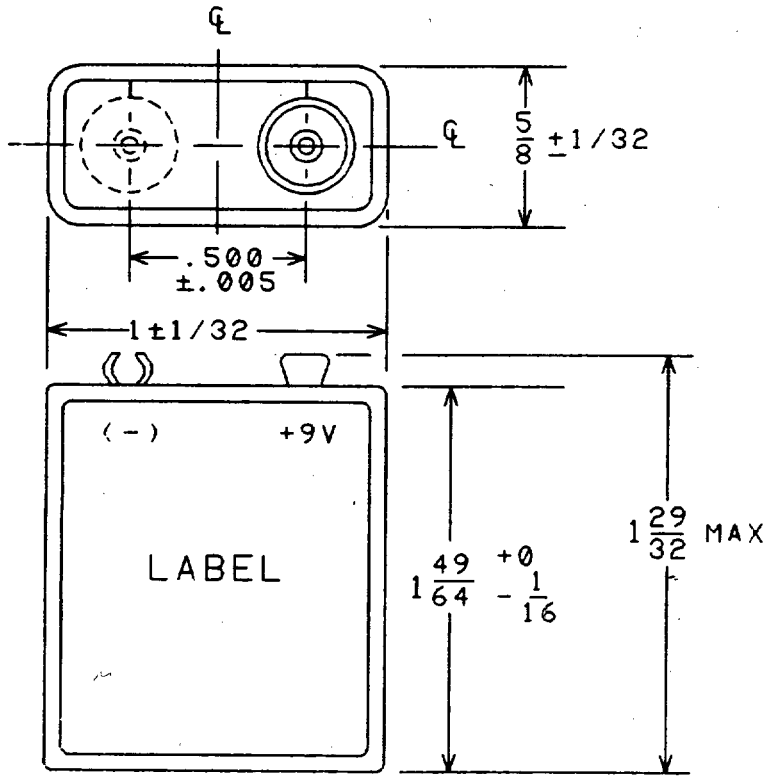

Inches	MM
.005	0.13
1/32	0.79
1/16	1.59
.500	12.70
5/8	15.88
1	25.40
1-49/64	44.85
1-29/32	48.42

Figure 1. Dimensions and configuration.

AMSC N/A

FSC 6135

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.
2. Voltage and polarity markings may be placed either on the top or front face of the battery, adjacent to the applicable terminal
3. Metric equivalents specified are for general information only.
4. Label may be placed on either face of the battery

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Nominal voltage: 9.0 volts.

Usual number and type of cells: 6 M2200 cells.

Usual cell connection: Series.

Terminal: Snap-on (miniature), ANSI XVII.

Capacity Tests: When the battery is tested with the methods of examination and tests of this specification, the minimum capacity test requirements shall be as specified herein.

METHODS OF EXAMINATION AND TEST:

Capacity Tests:

Test	Storage Period	Temperature (^{o}F)	Min Service Required (Hrs)
I	48 Hrs. Min.	70	18
LT	16 Hrs. Min	0	5.0
HT	7 Days plus	160	
	48 Hrs. Min.	70	18
T	13 weeks plus	113	
	48 Hrs. Min.	70	18
D	52 Wks.	70	18

Discharge: The battery shall be discharged through 300 ohms continuously to an end voltage of 5.4 volts.

Closed circuit voltage: Use TS-183 ()/U per special marking or, with minimum permissible voltage as specified for TS-183()/U, use a load resistance value of 544 ohms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.

Special marking on each unit package:

To Test This Battery With TS-183 ()/U

Use Jack No.	Minimum Permissible Voltage
13	7.1 Volts

Unless expressly authorized, this test information shall apply to Army and Air Force applications only.

Custodian:
Army-ER

Preparing Activity:
Army-ER

(Project 6135-A212)

☆U.S. GOVERNMENT PRINTING OFFICE: 1988 - 505-033/92517

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:44Z
Check the source to verify that this is the current version before use.