INCH-POUND

MIL-C-49285/8
19 October 1989

MILITARY SPECIFICATION SHEET

CABLE, SPECIAL PURPOSE, ELECTRICAL, ELEVEN INDIVIDUALLY SHIELDED PAIRS OF 22 AWG SOLID WIRE

NOTE: NOT FOR AEROSPACE USE.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-49285.

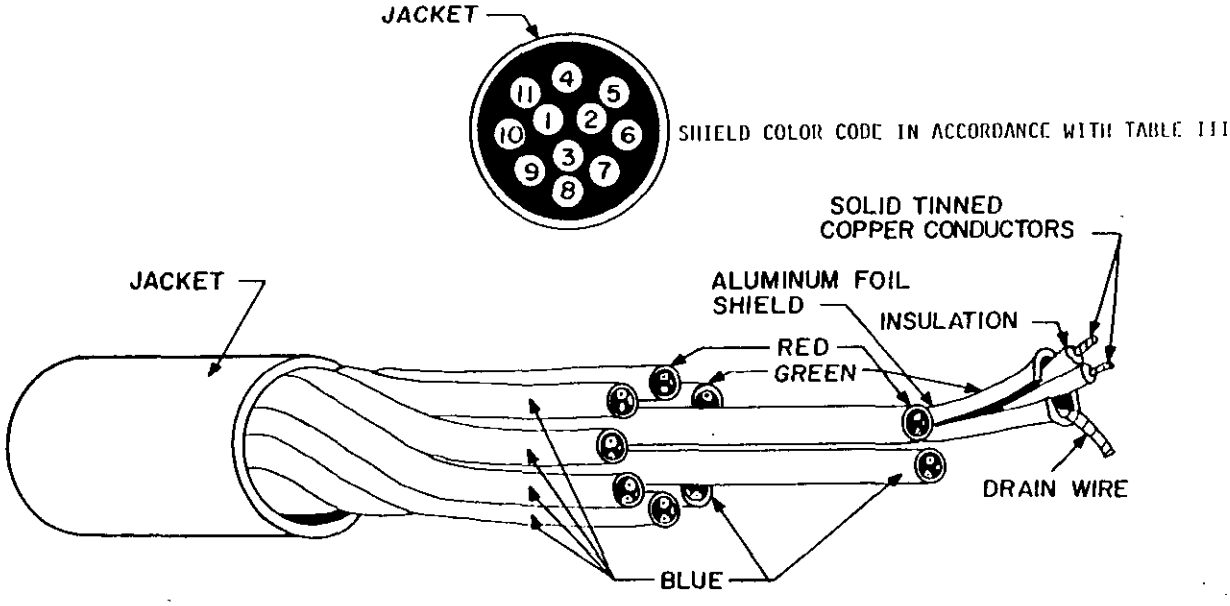



FIGURE 1. Cable illustration.


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:59Z
Check the source to verify that this is the current version before use.

Engineering information: (See table I).

TABLE I. Description, electrical.

| Electrical characteristics | Requirements |
|---|---|
| Nominal capacitance between conductors | 40 pF/ft (picofarads/foot) |
| Nominal capacitance between the conductor and the shield with one conductor tied to the shield | 77 pF/ft |
| Continuous working voltage | 300 V rms maximum between conductors |
| Nominal capacitance between adjacent shields | 150 pF/ft |
| Continuous working voltage between adjacent shields | 50 volts maximum |
| Shield dc resistance | 14 ohms/1,000 feet maximum |

TABLE II. Description, physical.

| Components | Construction details |
|---|---|
| Number of pairs | Eleven individually shielded |
| Conductor type and wire size | Solid tinned copper 22 AWG |
| Conductor insulation | Polyvinyl chloride |
| Conductor insulation thickness | 0.013 inch nominal thickness |
| Drain wire type and size | Solid tinned copper 22 AWG |
| Jacket material | Polyvinyl chloride |
| Jacket thickness | 0.040 inch |
| Finished cable diameter | 0.495 inch maximum outside diameter |
| Cable style (UL) | 2464 |
| Tensile strength (jacket) | 2,000 pounds per square inch minimum |
| Elongation (jacket) | 150 percent minimum |
| Overall cabling lay length | 1.3 twists per foot ±10 percent |

Cabled pair orientation: The position of the red and green pair shield shall determine the rotation direction for pair location (see figure 1).



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:59Z
Check the source to verify that this is the current version before use.

TABLE III. Shield color code.

| Pair numbers | Shield color |
|---|---|
| Center core | |
| 1st pair | Red |
| 2nd pair | Green |
| 3rd pair | Blue - 1 |
| Outer layer | |
| 4th pair | Red |
| 5th pair | Green |
| 6th pair | Blue - 1 |
| 7th pair | Blue - 2 |
| 8th pair | Blue - 3 |
| 9th pair | Blue - 4 |
| 10th pair | Blue - 5 |
| 11th pair | Blue - 6 |

REQUIREMENTS:

Design and construction: (See tables II and III).

Shield location and orientation. The polyester aluminum shield is to be located on the outer circumference of the pair with the aluminum foil side inward. Insulation on the exterior of the shield is to be complete with no aluminum available for contact.

Drain wire location. Each drain wire is to be spirally located beneath the shield with the insulated conductors. It is to be in continuous contact with the aluminum surface of the foil shield throughout the cable.

Cable temperature rating. The cable temperature rating shall be -20°C to +80°C.

Flammability. The cable shall pass UL 1581 VW-1 flame test requirements.

Shield integrity test.*

| Frequency | Response ** |
|---|---|
| 100 kHz | 114 dB below reference |
| 500 kHz | 105 dB below reference |
| 1 MHz | 99 dB below reference |
| 5 MHz | 85 dB below reference |
| 10 MHz | 79 dB below reference |
| 15 MHz | 74 dB below reference |
| 20 MHz | 70 dB below reference |
| 25 MHz | 65 dB below reference |
| 30 MHz | 61 dB below reference |
| 100 MHz | 42 dB below reference |

* Any two readings may deviate to a value of 0.9 times the stated limits.

** All values are a minimum numerical value.

Fixture resonance will occur between 40 and 70 MHz.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:59Z
Check the source to verify that this is the current version before use.

Crosstalk test limits. All values are minimums.

| Frequency (KHz) | Near end crosstalk (dB) | Far end crosstalk (dB) |
|---|---|---|
| 40 | 58 | 58 |
| 70 | 56 | 55 |
| 100 | 54 | 53 |
| 1,000 | 55 | 52 |

Insulation resistance between shields: 100 megohms/1,000 feet minimum.

Durometer hardness: The cable jacket shall have a "Shore A" hardness of 82 ±5.

Part or Identifying Number (PIN): The PIN shall be M49285/08.

## CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - SH
Air Force - 85

Review activities:
Army - MI
Air Force - 71
DLA - ES, IS

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 6145-1114-08)



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:59Z
Check the source to verify that this is the current version before use.