INCH-POUND

MIL-DTL-55074/1B
w/AMENDMENT 1
15 February 2019
SUPERSEDING
MIL-DTL-55074/1B
12 August 2003

DETAIL SPECIFICATION SHEET

CONNECTOR, PLUG, TELEPHONE, ELECTRICAL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-55074.

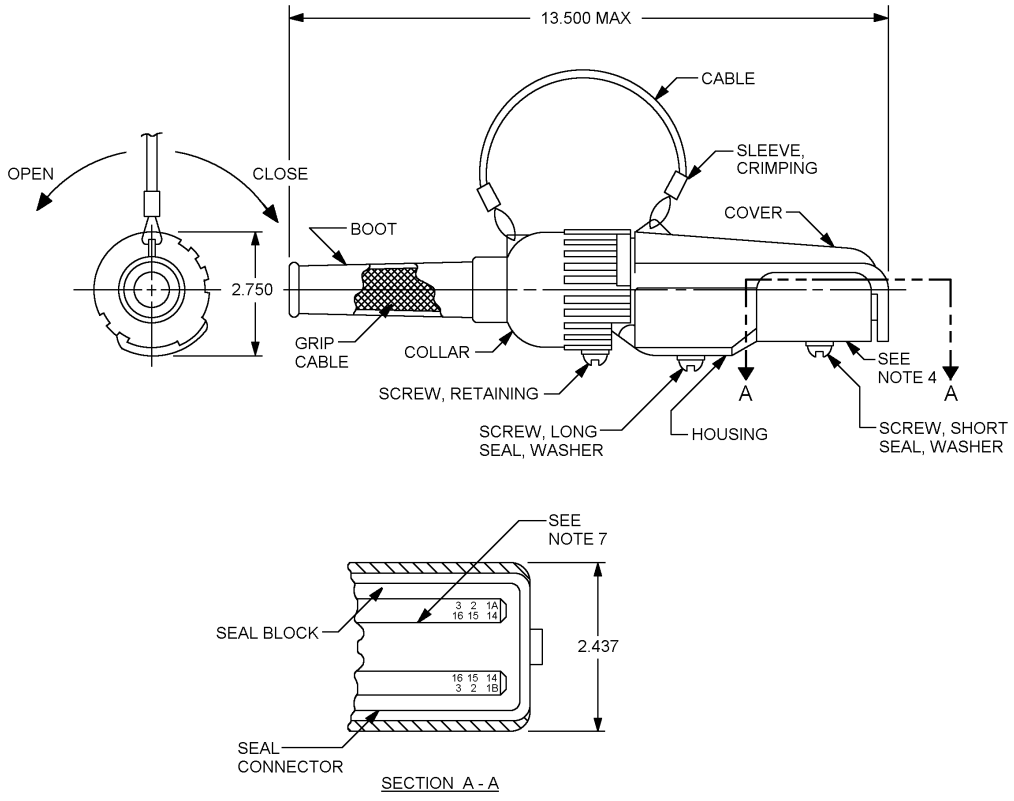


FIGURE 1. Connector plug.

Inches	mm
2.437	61.90
2.750	69.85
13.500	342.90

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:20Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± .015 (.38 mm).
4. Marking to appear in area shown. Marking to consist of manufacturer's name or CAGE code, CONN. PLUG ELEC., U-185B/G (M55074/1), molded in characters approximately .187 inch (4.75mm) high.
5. This connector will mate with itself MIL-DTL-55074/1 (U-185B/G), and connectors MIL-DTL-55074/2, (U-186C/G), and MIL-DTL-55074/3 (U-187A/G).
6. Turning cable end of connector to left unlocks cover for mating; turning to right locks cover. (See applicable end view, page 1).
7. See MIL-DTL-55074/4 for contact assembly specifications.
8. M55074/1 also represents U-185B/G where applicable in MIL-DTL-55074.
9. Connector shall be manufactured in accordance with drawing number SC-DL-173805.
10. Connector must conform to the interchangeability requirements of gage number SC-GL-57996.

FIGURE 1. Connector plug – Continued.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Material:

Housing – Aluminum, commercial alloy 380 in accordance with SAE-AMS-QQ-A-591, finish in accordance with MIL-DTL-14072.

Collar – Aluminum, commercial alloy 380 in accordance with SAE-AMS-QQ-A-591, finish in accordance with MIL-DTL -14072.

Cover – Aluminum, commercial alloy 380 in accordance with SAE-AMS-QQ-A-591, finish in accordance with MIL- DTL-14072.

Boot – Silicone rubber, class 3, grade 50 in accordance with A-A-59588.

Seal, block – Low temperature neoprene, M3BA507F19 in accordance with ASTM D2000, or equal.

Seal, connector – Silicone rubber, class 2B, grade 40, in accordance with A-A-59588.

Seal, washer – Stat-O-seal, aluminum 7375-T6 (anodized) in accordance with SAE AMS-QQ-A-250/12, rubber in accordance with MIL-PRF-6855, class 1, 2 or 3.

Grip cable – 7 wires (.010) stranded to .032 diameter in accordance with ASTM A580/A 580M (9 inch cut length).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:20Z
Check the source to verify that this is the current version before use.

Sleeve, crimping – Copper, zinc plated.

Screw – Pan head, slotted #6-32 NC x .500 lg in accordance with FF-S-92.

Screw – Slotted, retaining, #10-32NF-2A, special, E300 in accordance with MIL-DTL-14072.

Screw – Pan head, slotted #6-32 NC x .875 lg in accordance with FF-S-92.

Part or Identifying Number (PIN): M55074/1-01.

Referenced documents. In addition to MIL-DTL-55074 this document references:

MIL-DTL-14072	MIL-DTL-55074/2	SAE-AMS-QQ-A-591	SAE AMS-QQ-A-250/12
MIL-PRF-6855	MIL-DTL-55074/3	ASTM D2000	ASTM A580/A 580M
FF-S-92	MIL-DTL-55074/4	A-A-59588	SC-DL-173805
SC-GL-57996			

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

CONCLUDING MATERIAL

Custodians:
Army - CR
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2018-153)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:20Z
Check the source to verify that this is the current version before use.