INCH-POUND
MIL-C-55302/126C(USAF)
6 MAY 1993
SUPERSEDING
MIL-C-55302/125B(USAF)
21 September 1988

MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES PLUG, 80 CONTACT POSITIONS, FOR PRINTED WIRING BOARDS (050 INCH SPACING)

This specification sheet is approved for use by Rome Air Development Center, Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-C-55302


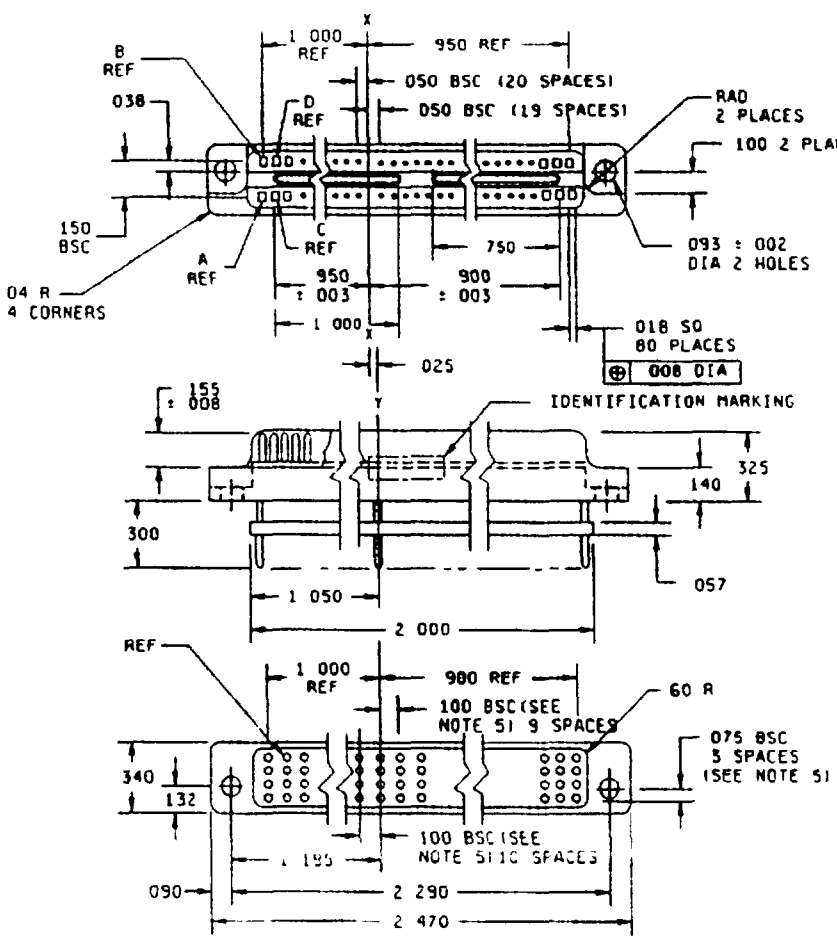


FIGURE 1 Connectors, plug, 050 (1.27 mm) spacing

© denotes change

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:51Z
Check the source to verify that this is the current version before use.

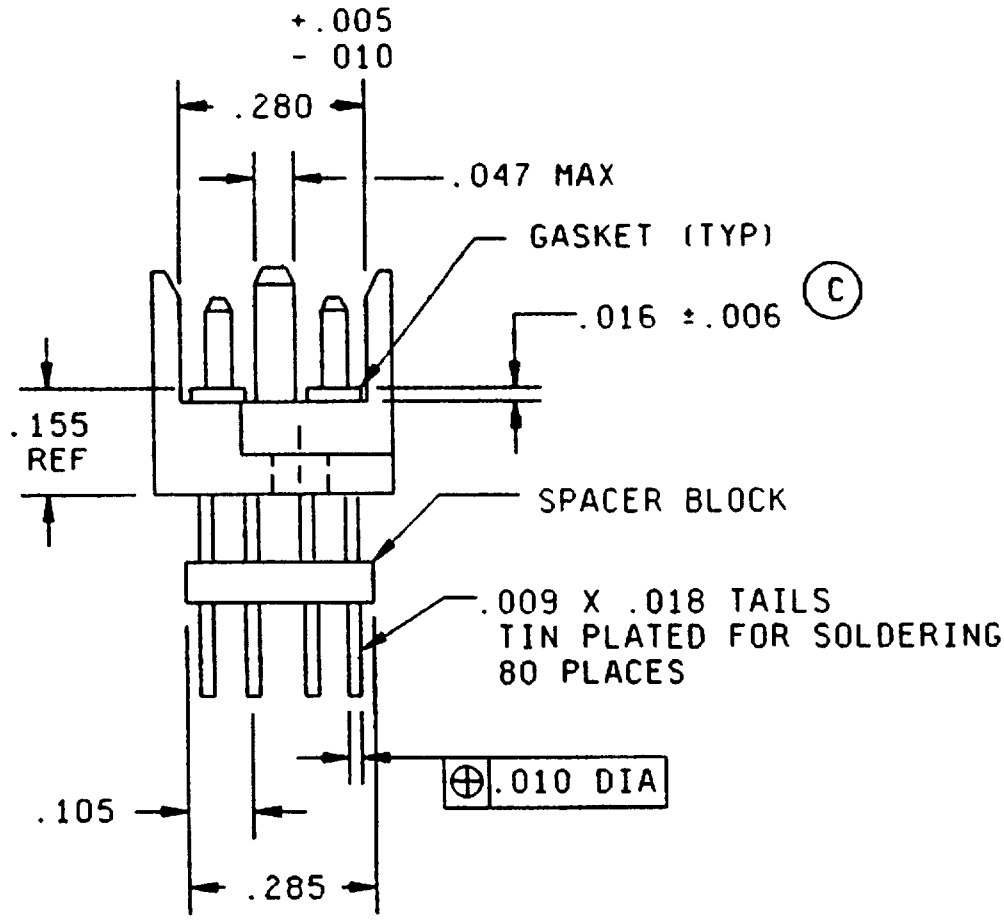

Inches	mm	Inches	mm	Inches	mm	Inches	mm
002	0 05	057	1 45	150	3 81	900	22 86
.005	0 13	060	1 52	155	3 94	950	24 13
.008	0 20	090	2 29	280	7 11	1 000	25 40
010	0 25	093	2 36	285	7.24	1.050	26.67
018	0.46	.100	2 54	300	7.62	1 195	30.35
025	0 64	105	2 67	325	8 26	2 000	50 80
.038	0 97	.132	3 35	.340	8 64	2 290	58 17
040	1 02	140	3 56	.750	19.05	2 470	62 74
050	1 27						

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only
3. Unless otherwise specified, tolerance is ± 005 (0 13 mm) and ±2° on angles
4. These connectors mate with connectors specified in MIL-C-55302/126
5. Dimension applies at point of egress from spacer block

FIGURE 1 Connectors, plug, 050 (1 27 mm) spacing - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:51Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction

Dimensions and configurations See figure 1

Material

Body In accordance with MIL-C-55302

(C) Plating Contact plating shall be gold in accordance with MIL-C-55302 over nickel in accordance with MIL-C-55302 in the contact engagement area for 100 inch minimum length The termination area plating shall be tin lead in accordance with MIL-C-55302 over nickel in accordance with MIL-C-55302 for 250 inch minimum length

Contact identification See figure 1

Contact rating 1 5 amperes per contact, maximum

Operating temperature -65°C to +125°C

Keying See MIL-C-55302/31

Mating and unmating The maximum mating force in pounds shall be the number of contacts multiplied by 30 and the withdrawal force in pounds shall be a minimum of 03 times the number of contacts and shall not exceed the measured insertion force

Contact resistance· The average contact resistance of all contacts measured shall not exceed 025 ohm, and no individual contact pair shall have resistance exceeding 030 ohm

Contact retention 75 pound, minimum

Dielectric withstanding voltage

Sea level 450 volts rms

High altitude 150 volts rms

Solderability Each connector shall be subjected to method 208 of MIL-STD-202 (solder termination only) (applicable to qualification and retention of qualification only)

Part number M55302/125-01

Patent number 3,404,367 The Government has a royalty free license under this patent for the benefit of manufacturers of the item either for the Government or for use in equipment to be delivered to the Government

CONCLUDING MATERIAL

Custodian
Air Force 17

Review activities
Air Force - 11, 85, 99
DLA ES

User activity
Air Force - 19

Preparing activity
Air Force - 17

Agent
DLA - ES

(Project 5935-F413)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:51Z
Check the source to verify that this is the current version before use.