INCH-POUND

A-A-50003F
August 18, 2025
SUPERSEDING
A-A-50003E
September 30, 2019

COMMERCIAL ITEM DESCRIPTION

DRAWERS, MEN'S (BRIEF TYPE)

The General Services Administration has authorized the use of this Commercial Item Description (CID) for all Federal agencies.

1. SCOPE. This CID covers requirements for a cotton men's brief type drawers worn by military personnel of the Department of Defense.

2. CLASSIFICATION. The men's brief type drawers shall be in the following classes and sizes:

2.1 Classes.

Class 1 - White
Class 2 - DELETED
Class 3 - DELETED
Class 4 - Tan 499

2.2.1 Sizes.

Schedule of sizes

28	38
30	40
32	42
34	44
36	

Comments, suggestions, or questions on this document should be sent to: trpsptctsandardiz@dla.mil. Since contact information can change, you may want to verify the currency of the address information using ASSIST online database https://assist.dla.mil.

AMSC N/A FSC 8420

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS.

3.1 Description. The men's drawers shall be brief type with sloped elasticized leg opening and an elastic waistband.

3.1.1 Figure. Figure 1 is furnished for information purposes only. To the extent of any inconsistencies between the written document and the figure, the written document shall govern.

3.2 Materials.

3.2.1 Basic material. The material shall be 100 percent combed cotton circular knit and constructed with a single or 2-ply yarn with a 1x1 ribbed knit for the body of the drawers and leg opening strip binding. No materials having a tendency to cause latent tendering or yellowing shall be used in any of the dyeing or finishing operations and resin finishes shall not be used. The material shall be preshrunk and shall conform to the requirements as specified in Table I.

3.2.2 Fly and leg opening strip binding material. The material shall be made of 100 percent combed cotton circular jersey knit and constructed with a single or 2-ply yarn. No materials having a tendency to cause latent tendering or yellowing shall be used in any of the dyeing or finishing operations and resin finishes shall not be used. The material shall be preshrunk and shall conform to the requirements as specified in Table I.

3.2.3 Waistband material. The waistband shall be woven or knitted from cotton or polyester yarns and shall be 1-1/4 inches minimum in width and shall have a minimum of 14 elastic strands and a commercial holding power (modulus) of 1 pound minimum, 30 percent stretch.

3.2.4 Color. The color of the Class 1 drawers shall be bleached white and for Class 4 shall be Tan 499. The finished men's drawers shall match the standard sample for shade and appearance and shall be equal to or better than the standard sample with respect to all characteristics for which the standard sample is referenced (see 7.4).

3.2.4.1 Visual shade matching. The color and appearance of the men's drawers shall match the standard sample when viewed using the AATCC EP9, Option C, (see 7.4.1) with a primary light source simulating the spectral quality of average daylight, CIE Illuminant D65, with a color temperature of 6500 (± 200) Kelvin (K) illumination of 100 (± 20) foot candles. Alternatively, the color and appearance of the men's drawers shall match the standard sample with a primary light source simulating artificial daylight, CIE Illuminant D75, with a color temperature of 7500K (± 200) illumination of 100 (± 20) foot candles in lieu of D65. (See 7.4.2). The men's drawers shall also be a good match to the standard sample with a secondary source simulating the spectral quality of incandescent lamplight, CIE Illuminant A, with a color temperature of 2856K (± 200).

3.3 Requirements. The finished drawers shall conform to the physical and colorfastness requirements specified in Table I when tested in accordance with the test methods in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

TABLE I. Physical requirements.

Characteristic	Requirement	Test Method
Basic Material		
Fiber identification	100% cotton	AATCC TM20A (see 7.5)
Weight, oz./yd.^{2}	4.0 (± 0.2)	ASTM D3776/D3776M, Opt. C
Yarns per inch (min.)		
Wales	21	ASTM D8007 1/
Courses	29	
Bursting strength, lb./in.^{2} (psi) (min.)	60	ASTM D3787 or ASTM D6797
Colorfastness (all Classes except Class 1) (min.):		
Laundering (3 cycles)	3-4	AATCC TM61, Test 3A 2/
Perspiration (acid and alkaline)	3-4	AATCC TM15 2/
Lightfastness (after 40 AFU or 170 kJ)	3-4	AATCC TM16.3, Opt. 3 3/
Crocking (wet and dry)	3-4	AATCC TM8 4/
Dimensional change, percent (5 cycles) (max.)		
Wales	10.0	AATCC TM135 (1), IV, Aiii
Courses	10.0	
pH	5.0 – 8.5	AATCC TM81
Fly and Leg Opening Strip Binding Material		
Fiber identification	100% cotton	AATCC TM20 (see 7.5)
Yarns per inch (min.)		
Wales	29	ASTM D8007 1/
Courses	35	
Colorfastness (all Classes except Class 1) (min.):		
Laundering (3 cycles)	3-4	AATCC TM61, Test 3A 2/
Perspiration (acid and alkaline)	3-4	AATCC TM15 2/
Lightfastness (after 40 AFU or 170 kJ/(m^{2}nm) @420 nm)	3-4	AATCC TM16.3, Opt. 3 3/
Crocking (wet and dry)	3-5	AATCC TM8 4/
Dimensional change, percent (5 cycles) (max.)		
Wales	10.0	AATCC TM135 (1), IV, Aiii
Courses	10.0	
pH	5.0 – 8.5	AATCC TM81

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

TABLE I. Physical requirements. - Continued

Characteristic	Requirement	Test Method
End Item		
Dimensional change, percent (5 cycles) (max.) Wales Courses	 10.0 10.0	 AATCC TM150 (1), IV, Aiii 5/

1/ Section 12 Fabric Count only.
2/ Rated using the AATCC EP1, Evaluation Procedure for Gray Scale for Color Change and AATCC EP2, Evaluation Procedure for Gray Scale for Staining. Only the stain on the cotton fibers of the color transfer cloth shall be evaluated.
3/ Rated using the AATCC EP1, Evaluation Procedure for Gray Scale for Color Change. When specified bleached whites, fluorescent materials or materials containing optically brightened fibers shall be checked for matching fluorescence against the standard sample using an ultraviolet source.
4/ Rated using the AATCC EP8, Evaluation Procedure for AATCC 9-Step Chromatic Transference Scale.
5/ Measurements shall be taken at half waist, trunk and seat width (see Table II).

3.3.1 Labile sulfur. The use of dyes and compounds containing sulfur capable of oxidation to sulfuric acid is prohibited. The cloth shall be "Free" of labile sulfur when tested as specified in 3.3.1.1.

3.3.1.1 Presence of labile sulfur test. Two (2) 1.50 (± 0.01) gram samples from each sample unit shall be tested. Each of the two (2) samples shall be cut into very small pieces and placed into separate test tubes. Prepare an acidic tin (II) chloride (stannous chloride) solution by dissolving 100 g SnCl2 (ACS grade) in 100 mL of 35% hydrochloric acid (ACS grade) and adding the mixture to 50 mL of distilled water. Prepare a lead acetate solution by dissolving 5.0g of lead acetate (CP reagent grade) in a small amount of distilled water and diluting to a total of 100 mL. If the solution is not clear, add a few drops (one at a time) of glacial acetic acid until the solution is clear. The samples shall be submersed in the acidic tin (II) chloride solution. A filter paper wet out with the lead acetate solution shall be placed over the top of the test tube. The test tube containing the textile sample, tin (II) chloride and wet filter paper shall be heated over a low flame until the solution is boiling. The solution should not be heated for more than 15 seconds. A brown to black stain on the filter paper should be evaluated as follows:

Free - The filter paper shows no discoloration or staining of any kind.
Slight - The filter paper shows a light tan to light brown discoloration stain.
Moderate - The filter paper shows a dark brown discoloration stain.
Severe - The filter paper shows a black color stain.

The rating shall be recorded. The results shall be recorded as "pass" or "fail.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

3.4 Thread (all classes). The thread shall be 100 percent cotton, Tex 30, 2 or 3-ply or Tex 60, 3-ply in accordance with A-A-52094. As an alternate, a 2-ply cotton or staple polyester-covered, polyester core thread, Tex 25-35, 2-ply in accordance with A-A-50199 or 100 percent textured stretch polyester, size Tex 18 conforming to A-A-52095, may be used as the looper/cover threads for all stitching. The thread shall approximate the shade of the basic material. The color of the thread shall be as follows:

Class 1 - White	Bleached white
Class 4 - Tan 499	Shall approximate the shade of the basic material

3.4.1 Stitches, seams and stitching. All stitches shall be 12-16 stitches per inch and conform to ASTM D6193.

3.4.2 Bartacks. Secure ends of stitching with bartacks where the body and fly cloth form crotch at leg opening strip binding. Bartacks shall measure 1/2 (± 1/8) inch long. Bartacks shall be free from thread breads and loose stitching. As an alternate, stitch type 304 with two (2) close stitching at beginning and end shall be used.

3.5 Combination size, identification and instruction label. Each men's drawer shall have a combination size, identification and instruction label in accordance with Type III, IV or VI, Class 14 of MIL-DTL-32075. The label for all classes shall be placed on the inside center back just below the waistband and shall contain the following information:

DRAWERS, MEN'S (BRIEF TYPE)
SIZE: 34 (EXAMPLE)
NSN: XXXX-XX-XXX-XXXX
CONTRACT NUMBER:
CONTRACTOR'S NAME:
100% COTTON

Machine or hand wash warm water.
Line or tumble dry low.

For Class 4, the following information shall also be included on the label:

Do not bleach.
Use of acne medication containing Benzoyl peroxide will cause discoloration.

3.5.1 Bar coded hang tag. Each men's drawer shall be individually bar-coded with a commercially acceptable pressure sensitive label. The barcoding element shall be a 13-digit National Stock Number (NSN). There shall also be a 12-digit UPC number assigned for all NSN's by the contracting activity. The initials "UPC" shall appear beneath the bar code. The bar code for the NSN and UPC type shall be a medium to high code density and shall be human-readable interpretation (HRI), located so that it is completely visible on the item when folded and/or packaged as specified causing no damage to the item.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

3.6 Patterns. The contractor is responsible for generating the patterns for the men's drawers. The commercial patterns shall conform to the men's brief type drawer's description (see 3.1) and finished measurements (see 3.7 and Table II).

3.7 Sizes and measurements. The finished measurements shall be as specified in Table II.

TABLE II. Sizes, weights and finished measurements (inches) (all classes). 1/

Size	Half Waist (relaxed) 2/ (minimum)	Trunk 3/ (minimum)	Seat Width 4/ (minimum)
28	10-3/4	12-3/4	13
30	11-1/2	13-3/4	14
32	12	13-3/4	14
34	13	14-3/4	15-1/2
36	14	14-3/4	15-1/2
38	15	15-3/4	17
40	16	15-3/4	17
42	17	16-3/4	18-1/2
44	18	16-3/4	18-1/2

1/ Unless otherwise specified the drawers shall be laid flat and smooth when the Measurements are taken.
2/ The half waist measurement shall be taken along the top edge of the waistband.
3/ The trunk of the measurement shall be taken from the top of the waistband to the fold at the bottom of the drawers midway between the leg openings.
4/ The seat width measurement shall be taken at the widest point above the leg binding.

3.8 Toxicity. Unless otherwise specified in the contract or procurement documents, the finished drawers shall not present a health hazard and shall show compatibility with prolonged, direct skin contact when tested as specified in 3.8.1.

3.8.1 Toxicity test. When the toxicity requirement (see 3.8) can be demonstrated with historical use data, on the finishing treatments used, toxicity testing may not be required (see 7.1.4 and 7.5).

3.9 Workmanship. The finished drawers shall conform to the quality of product established in this document. The drawers shall be free from defects which would affect its serviceability, appearance, uniformity, and quality assurance standards defined by the technical data in the bid package.

4. REGULATORY REQUIREMENTS. Unless otherwise specified, the offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR) or the sustainable acquisition of EO 13834; as applicable, (see 7.1.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

5. PRODUCT CONFORMANCE PROVISIONS.

5.1 Product conformance. The drawers shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product that is offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance.

5.2 Market acceptability. The drawers offered, or generic equivalent, must have been sold to the Government or the commercial market.

5.3 End item inspection procedures. Sampling for inspection shall be conducted in accordance with ASQ/ANSI Z1.4 - Sampling Procedures and Tables for Inspection of Attributes (see 7.2.2).

5.4 Visual examination. Each finished drawer shall be examined for defects listed in Table III as defined in MIL-STD-1491 and ASTM D3990. The lot size shall be expressed in units of drawers. The sample unit shall be one (1) drawer.

TABLE III. Visual examination defects.

Material defects: Any hole, cut, tear, permanent fold, mend, pleat, or crease, loose course, miss knit, slub, thin area; any spot or stain on outside, streak, discoloration or color not as specified, any outwardly visible shaded part; knitted-in waste, any serious material defects or objectionable odor.
Stitches, seams and stitching: Loose or tight stitching tension, broken or skipped stitches, needle chew, any part caught in an unrelated operation or stitching, raw edge, thread ends not removed, any seam slippage, re-stitching, pleating or puckering; open, pulled or snagged stitches, twisted, ragged or inconsistent edge.
Workmanship: Any component part omitted, twisted, not specified size, missing, misplaced or distorted parts; poorly shaped, any dimension of item not as specified; neck stretched or loose; design not as specified. Failure to meet product conformance; serviceability, reliability and quality of materials as defined by this document.
Labels: Label(s) missing, incorrect, or illegible; bar code or UPC code label omitted or not readable by scanner; human-readable interpretation (HRI) omitted or illegible; bar code not visible on folded packaged item, bar code label causes damage to the item.
Packaging: Not packaged in accordance with the contract or purchase order.

5.5 Dimensional examination. The finished drawers shall conform to the dimensions specified in Table II when measured as stated. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one (1) drawer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

5.6 Acceptance criteria. Acceptance criteria shall be as specified in the contract or purchase order (see 7.6).

6. PACKAGING. The preservation, packing and marking shall be as specified in the contract or purchase order (see 7.6).

7. NOTES.

7.1 Sources of Government documents.

7.1.1 Copies of government documents are available online at https://quicksearch.dla.mil.

7.1.2 EPA and EO 13834 information is available online at https://www.epa.gov.

7.1.3 Federal Acquisition Regulations (FAR) are available online at https://acquisition.gov.

7.1.4 Toxicity testing. If dermal toxicity testing is required, it will be conducted in accordance with Title 40, Protection of Environment, Code of Federal Regulations current edition and applicable sections, which are also consistent with the following OECD tests:

Skin Sensitization 406 and Dermal Irritation 404 (https://www.oecd-ilibrary.org/environment/oecd-guidelines-for-the-testing-of-chemicals-section-4-health-effects_20745788?page=1).

Dermal Sensitization (https://www.law.cornell.edu/cfr/text/40/798.4100).
Dermal Toxicity (https://www.law.cornell.edu/cfr/text/40/798.2250).

7.2 Source of non-Government documents.

7.2.1 AATCC Test Methods are available for purchase online at https://aatcc.org.

7.2.2 ASQ/ANSI Z1.4 – Sampling Procedures are available online at https://asq.org.

7.2.3 ASTM Standards are available for purchase online at https://www.astm.org.

7.3 Intended use. The item is intended to be used as men's brief type drawers by military personnel.

7.4 Standard samples. For access to standard shade samples of cloth and thread, address the contracting activity issuing the invitation for bids or request for proposal.

7.4.1 Visual shade matching. In 2017, Option A of AATCC Evaluation Procedure 9, Visual Assessment of Color Difference of Textiles was changed to Option C. NOTE: In case of confusion, the viewing geometry should be "The specimen plane and illumination source will be

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

parallel to each other and aligned so that the light flux is incident at the center of the specimen plane, which is set at a 35 (± 5º) angle relative to the horizontal. The observer will view the specimens at a 90º angle, relative to the plane of the specimens".

7.4.2 In 2022, the U.S. Military (All Services) accepted D65 as the new preferred light source for visual shade matching due to the supply chain issues with D75. DD1222's should reflect which light source is used. If the light source is not indicated on the DD1222, D65 will be assumed by the Government Shade Laboratory.

7.5 Certificate of compliance. The contracting activity may select to accept a certificate of compliance for a stated requirement.

7.6 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this CID.
b. Classes and sizes required (see 2.2).
c. Color required (3.2.4).
d. When toxicity testing is required (see 3.8 and 3.8.1).
e. Product conformance (see 5.).
f. Acceptance criteria (see 5.6).
g. Packaging requirements (see 6.).

7.7 National Stock Number (NSNs). The following is a list of NSNs assigned that correspond to this CID. This list may not be indicative of all possible NSNs associated with the CID and are provided for reference only.

NSN	Class	Color	Size
8420-01-495-1988	Class 1	White	28
8420-00-009-2347	Class 1	White	28
8420-01-643-5298	Class 4	Tan 499	28

7.8 Changes from previous documents. The colors deleted and added are as follows:

Class 2 – Brown 436 (DELETED)
Class 3 – Desert Sand 503 (DELETED)
Class 4 – Tan 499 (ADDED)

7.9 Key words.

Clothing
Undergarments
Underwear
Knit

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

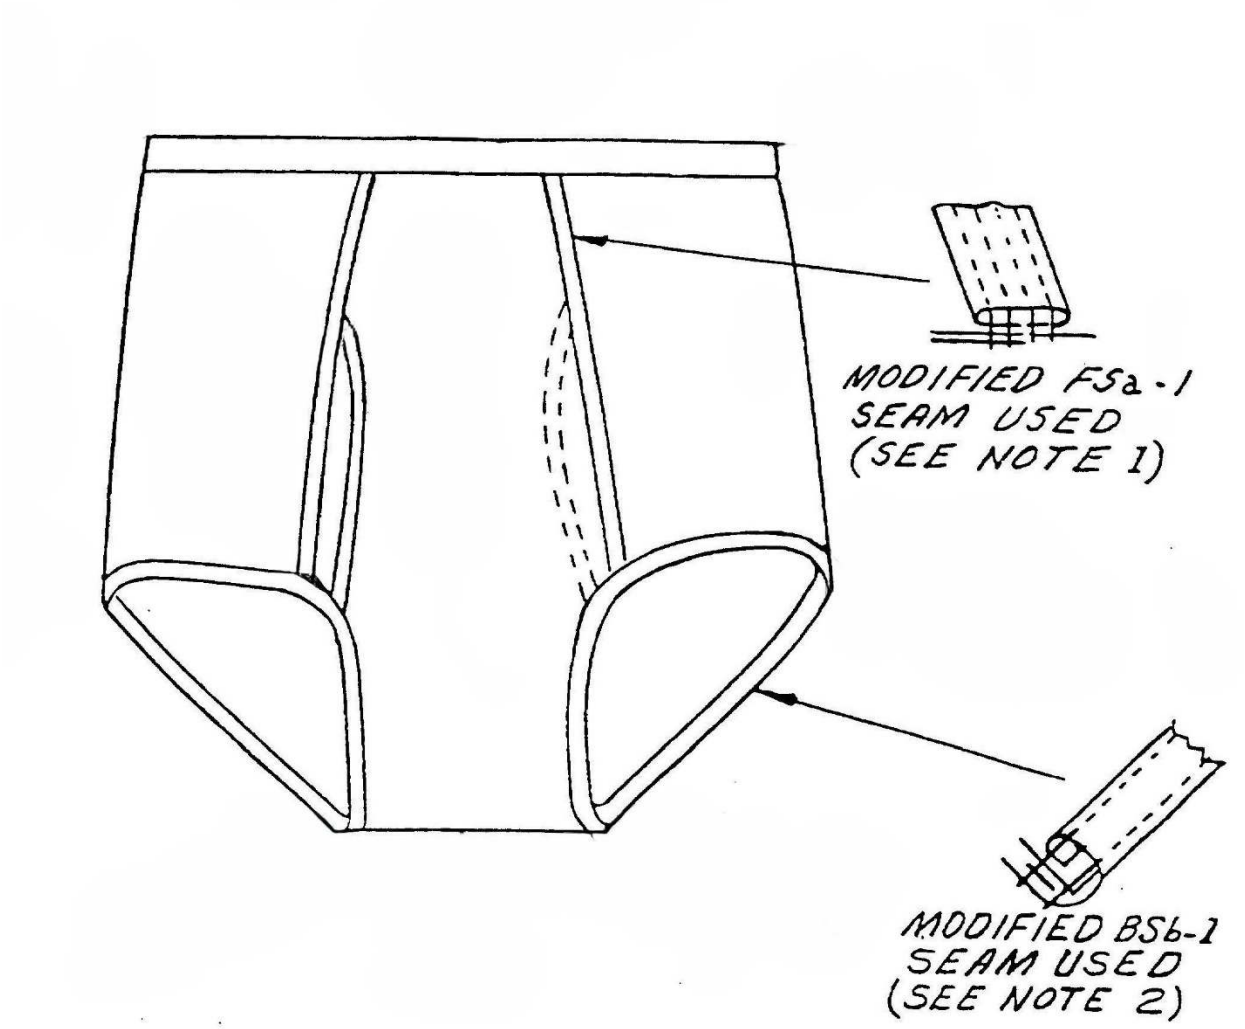


FIGURE 1. DRAWERS, MEN'S (BRIEF TYPE).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Army – GL
Navy – NU
Air Force – 11

Review activities:
Navy – CG1, MC

CIVIL AGENCY COORDINATING ACTVITY:
GSA-FAS

Preparing Activity
DLA-CT

(Project: 8420-2025-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.