INCH-POUND
A-A-50013H
September 9, 2024
SUPERSEDING
A-A-50013G
September 15, 2009

# COMMERCIAL ITEM DESCRIPTION

# UNDERSHIRT, QUARTER-SLEEVE

The General Services Administration has authorized the use of this Commercial Item Description (CID) by all Federal Agencies in preference to MIL-U-44096.

1. SCOPE. This CID covers the requirements for a cotton, quarter- sleeve undershirt worn by military personnel of the Department of Defense.

2. CLASSIFICATION. The undershirt shall be of the following types, classes and sizes:

2.1 Types.

Type I - Crew Neck, cotton
Type II - "V" Neck, cotton

2.2 Classes.

Class 1 – White
Class 2 – DELETED
Class 3 – CG Blue 3362
Class 4 – Black 357
Class 5 – DELETED
Class 6 – DELETED
Class 7 – Olive Green 109
Class 8 – Air Force Sand 1643
Class 9 – Tan 499
Class 10 – DELETED
Class 11 – Coyote Brown 3760
Class 12 – Olive Drab OD 522

Comments, suggestions, or questions on this document should be sent to trpsptctstandardiz@dla.mil. Since contact information can change, verify the currency of the address information using Acquisition Streamlining and Standardization Information System ASSIST online database https://assist.dla.mil.

AMSC N/A FSC 8420

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

2.3 Sizes. The undershirts shall be of the following sizes:

XX-Small
X-Small
Small
Medium
Large
X-Large
XX-Large
XXX-Large

3. SALIENT CHARACTERISTICS.

3.1 Description. The undershirt shall have hemmed quarter-length sleeves, a Crew Neck (Type I) or a "V" Neck (Type II) collarette, seamless sides and a hemmed bottom (see Figures 2 and 3). The collarette shall be made of a double thick, 1x1 rib knit material and finish 7/8 (± 1/8) inch wide. The inside of the shoulder and back of the collarette seam (shoulder to shoulder) shall be reinforced with tape of the basic knit fabric 3/8 to 1/2-inch wide and shall be cut along the grain.

3.1.1 Figures. Figure 1 is furnished for required methods of measuring and figures 2 and 3 for informational purposes only. To the extent of any inconsistencies between the written document and the figure, the written document shall govern.

3.2 Materials.

3.2.1 Basic material. The basic material shall be 100 percent combed cotton circular jersey knit and constructed with a single or 2-ply yarn for the body and sleeves. No materials having a tendency to cause latent tendering or yellowing shall be used in any of the dyeing or finishing operations and resin finishes shall not be used. The material shall be preshrunk and shall conform to the requirements as specified in Table I.

3.2.1.1 Collarette material. The material for the collarette shall be made of 100 percent combed cotton yarn and shall be a 1x1 rib knit. No materials having a tendency to cause latent tendering or yellowing shall be used in any of the dyeing or finishing operations and resin finishes shall not be used. The material shall be preshrunk and shall conform to the requirements specified in Table I.

3.2.2 Color. The color for Type I and Type II, Class 1 undershirts shall be bleached white and for Classes 3, 4, 7, 8, 9, 11 and 12 undershirts, shall be as specified in the contract or purchase order. The finished cloth shall match the standard fabrics for shade and appearance and shall be equal to or better than the standard sample with respect to all characteristics for which the standard sample is referenced (see 7.4).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

3.2.2.1 Visual Shade matching. The color and appearance of the undershirt shall match the standard sample when viewed using the AATCC EP 9, Option C, (see 7.7) with a primary light source simulating the spectral quality of average daylight, CIE Illuminant D65, with a color temperature of 6500 (± 200) Kelvin (K) illumination of 100 (± 20) foot candles. Alternatively, the color and appearance of the undershirt shall match the standard sample with a primary light source simulating artificial daylight, CIE Illuminant D75, with a color temperature of 7500K (± 200) illumination of 100 (± 20) foot candles in lieu of D65. (See 7.7.1). The undershirt shall also be a good match to the standard sample with a secondary source simulating the spectral quality of incandescent lamplight, CIE Illuminant A, with a color temperature of 2856K (± 200). The light source used shall be indicated on the test report and the DD Form 1222 if Government shade evaluation is requested.

3.3 Requirements. The finished undershirt shall conform to the physical and colorfastness requirements specified in Table I when tested in accordance with test methods in Table I.

TABLE I. Physical requirements.

| Characteristic | Requirement | Test Method |
|---|---|---|
| **Basic Material** | | |
| Fiber Identification | 100% cotton | AATCC TM20 (see 7.8) |
| Weight, oz./yd.$^2$ | 4.0 (± 0.2) | ASTM D3776/D3776M, Opt. C |
| Yarns per inch (min.) | | |
| Wales | 30 | ASTM D8007 |
| Courses | 36 | ASTM D8007 |
| Bursting strength, lbf/in.$^2$ (psi) (min.) | 60 | ASTM D3787 or ASTM D6797 |
| Colorfastness (all Classes except Class 1) (min.): | | |
| Laundering (3 cycles) | 3-4 | AATCC TM61, Test 3A 1/ |
| Perspiration (acid and alkaline) | 3-4 | AATCC TM15 1/ |
| Lightfastness (after 40 AFU or 170 kJ/(m$^2$nm)@420 nm) | 3-4 | AATCC TM16.3, Opt 3 2/ |
| Crocking (wet and dry) | 3.5 | AATCC TM8 3/ |
| Dimensional change, percent (5 cycles) (max.) | | |
| Wales | 10.0 | AATCC TM135 (1), IV, Aiii |
| Courses | 10.0 | |
| pH | 5.5-8.5 | AATCC TM81 |
| **Collarette Material** | | |
| Fiber identification | 100% cotton | AATCC TM20 (see 7.8) |
| Yarns per inch (min.) | | |
| Wales | 24 | ASTM D8007 |
| Courses | 32 | ASTM D8007 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

TABLE I. Physical requirements. - Continued

| Characteristic | Requirement | Test Method |
|---|---|---|
| **Collarette Material (cont'd)** | | |
| Dimensional change, percent (5 cycles) (max.) | | |
| Wales | 10.0 | AATCC TM135 (1), IV, Aiii |
| Courses | 10.0 | |
| Colorfastness (all Classes except Class 1) (min.): | | |
| Laundering (3 cycles) | 3-4 | AATCC TM61, Test 3A 1/ |
| Perspiration (acid and alkaline) | 3-4 | AATCC TM15 1/ |
| Lightfastness (after 40 AFU or 170 kJ/($m^2$nm) @420 nm) | 3-4 | AATCC TM16.3, Opt 3 2/ |
| Crocking (wet and dry) | 3.5 | AATCC TM8 3/ |
| pH | 5.5-8.5 | AATCC TM81 |
| **End Item** | | |
| Dimensional change, percent (5 cycles) (max.) | | |
| Wales | 10.0 | AATCC TM135 (1), IV, Aiii 4/ |
| Courses | 10.0 | |

1/ Rated using the AATCC EP1, Evaluation Procedure for Gray Scale for Color Change and AATCC EP2, Evaluation Procedure for Gray Scale for Staining.
2/ Rated using the AATCC EP1, Evaluation Procedure for Gray Scale for Color Change.
3/ Rated using the AATCC EP8, Evaluation Procedure for AATCC 9-Step Chromatic Transference Scale.
4/ Measurements shall be taken at half chest, body length, neck opening and arm hole (see Table III and Figure 1).

3.2.3 Labile sulfur. The use of dyes and compounds containing sulfur capable of oxidation to sulfuric acid is prohibited. The cloth shall be "Free" of labile sulfur when tested as specified in 3.2.3.1.

3.2.3.1 Presence of labile sulfur test. Two (2) 1.50 (± 0.01) gram samples from each sample unit shall be tested. Each of the two (2) samples shall be cut into very small pieces and placed into separate test tubes. Prepare an acidic tin(II) chloride (stannous chloride) solution by dissolving 100 g $SnCl_2$ (ACS grade) in 100 mL of 35% hydrochloric acid (ACS grade) and adding the mixture to 50 mL of distilled water. Prepare a lead acetate solution by dissolving 5.0 g of lead acetate (CP reagent grade) in a small amount of distilled water and diluting to a total of 100 mL. If the solution is not clear, add a few drops (one at a time) of glacial acetic acid until the solution is clear. The samples shall be submersed the acidic tin(II) chloride solution. A filter paper wet out with the lead acetate solution shall be placed over the top of the test tube. The test tube containing the textile sample, tin(II) chloride and wet filter paper shall be heated over a low flame until the solution is boiling. The solution should not be heated for more than 15 seconds. A brown to black stain on the filter paper should be evaluated as follows:



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

Free - The filter paper shows no discoloration or staining of any kind.
Slight - The filter paper shows a light tan to light brown discoloration stain.
Moderate - The filter paper shows a dark brown discoloration stain.
Severe - The filter paper shows a black color stain.

The rating shall be recorded. The results shall be recorded as “pass” or “fail.

3.2.4 Antimicrobial treatment. If antimicrobial is specified in the contract, the fabric shall be treated with an antimicrobial agent or incorporate antimicrobial fiber to inhibit growth of microorganisms when tested in accordance with ASTM E2149. The treatment shall be 99% effective against Staphylococcus Aureus, Klebsiella Pneumoniae and Escherichia Coli after 25 launderings.

3.3 Thread. The thread shall be 100 percent cotton, Tex 30, 2 or 3-ply or Tex 60, 3-ply in accordance with A-A-52094. As an alternate, a 2-ply cotton or staple polyester-covered, polyester core thread, Tex 25-35, 2-ply in accordance with A-A-50199 or 100 percent textured stretch polyester, size Tex 18 conforming to A-A-52095, may be used as the looper/cover threads for all stitching. The color of thread shall be as follows:

| | |
|---|---|
| Class 1 - White | Bleached white |
| Class 3 - CG Blue 3362 | Shall approximate the shade of the basic material |
| Class 4 - Black 357 | Shall approximate the shade of the basic material |
| Class 7 - Olive Green 109 | Olive Drab, S-1, C.A. 66022 or equal |
| Class 8 - Air Force Sand 1643 | Shall approximate the shade of the basic material |
| Class 9 - Tan 499 | Shall approximate the shade of the basic material |
| Class 11 - Coyote Brown 3760 | Shall approximate the shade of the basic material or Color Chip 23420 of AMS-STD-595 |
| Class 12 – Olive Drab OD 522 | Shall approximate the shade of the basic material or Color Chip 23420 of AMS-STD-595 |

3.3.1 Stitches, seams and stitching. All stitches shall be 10 (± 2) stitches per inch, conforming to ASTM D6193. The collarette shall be a double needle, stitch type 402 or 406, 1/4-inch seam, 3/16 to 1/4-inch from the edge of 3/8-inch back neck cotton binding reinforcement. Seam cover for the back of neck and shoulders binding reinforcement shall be SSa-2, stitch type 301 or 401 with reverse looper threads and no raw edges showing to reduce irritation or discomfort. All joining seams for circular sleeves, shoulders and collarette shall be SSa-1, stitch type 503 or 504 overedged with 1/4-inch seam and no raw edges. Hems for armhole sleeves and bottom shall be 1-inch, EFa-1, stitch type 402 or 406, with reverse looper cover stitch over the raw edge. All stitching shall allow for stretch and recovery with no puckering when shirt is worn.

3.4 Combination size and care instruction label. Each undershirt shall have a combination size and care instructions label in accordance with Type III or IV, Class 14 of MIL-DTL-32075. The label for all classes shall be placed on the inside center back just below the collarette and shall contain the following information:



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

UNDERSHIRT, QUARTER-SLEEVE, TYPE I (EXAMPLE)
SIZE: MEDIUM (38-40) (EXAMPLE)
NSN: XXXX-XX-XXX-XXXX
CONTRACT NUMBER:
CONTRACTOR'S NAME:
100% COTTON

Machine wash warm, permanent cycle, with like colors.
Tumble dry low, remove promptly. Warm iron if needed.
Do not remove label.

All classes except Class 1, shall include the following information in the care instructions:

Do not bleach.
Use of acne medication containing benzoyl peroxide will cause discoloration.

As an alternate, the size and identification label information may be on the side facing the wearer, and the care instructions on the opposite side.

3.4.1 Bar coded hang tag. Each plastic bag shall be individually bar-coded with a commercially acceptable pressure sensitive label in accordance with Type IX, Class 17 of MIL-DTL-32075. The barcoding element shall be a 13-digit National Stock Number (NSN). There shall be a 12-digit Universal Product Code (UPC) number assigned for all NSNs by the contracting activity. The initials "UPC" shall appear beneath the code. The bar code for the NSN and the UPC type shall be a medium to high code density and shall be human-readable interpretation (HRI), located so that it is completely visible on the item when folded and/or packaged as specified causing no damage to the item. This UPC code shall also be located so that it is completely visible. Each tag shall have the following inscription:

UNDERSHIRT, QUARTER-SLEEEVE, TYPE I (EXAMPLE)
MANUFACTURER'S NAME
CONTRACT NUMBER
SIZE:
NSN:
DESCRIPTION: CREW NECK (EXAMPLE)
COLOR: WHITE (EXAMPLE)

For the Class 11 undershirts, the following information shall be added to the Label/Tag "COLOR: Coyote Brown 3760, Class 11.

3.5 Patterns. The Government shall furnish a complete set of patterns or a master pattern with grade rules to maintain uniformity and consistency in manufacturing. The Government patterns shall be used to create the contractor's working patterns. Pattern guidelines shall not be modified. The Government will furnish a single size pattern. The contractor shall be responsible for grading patterns for additional sizes. Minor pattern modifications are permitted to accommodate manufacturing procedures; however, the design and finished measurements shall be obtained. A full set of patterns are available upon request. Commercial patterns may be used in lieu of



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

Government furnished patterns provided that they conform to the cited design and finished dimensions. The standard pattern provides a seam allowance of 1/4-inch for all joining seams (circular sleeves, shoulders and collarette) and 1-inch for hems of armhole sleeves and bottom. Pattern parts shall be as listed in Table II.

TABLE II. List of patterns.

| Material | Nomenclature | Pattern abbreviation | Number of cut parts |
|---|---|---|---|
| Basic | FRONT - TYPE I | A_A_50013-FRT-I | 1 |
| | BACK - TYPE I | A_A_50013-BCK-I | 1 |
| | FRONT - TYPE II | A_A_50013-FRT-II | 1 |
| | BACK - TYPE II | A_A_50013-BCK-II | 1 |
| | SLEEVE | A_A_50013-SLEEVE | 2 |

3.6 Sizes and measurements. The finished measurements shall be as specified in Table III.

TABLE III. Sizes and finished measurements (inches) (all types). 1/

| Sizes (Chest-inches) | (A) Half Width | (B) Length | (C) Type I - Neck Opening (Circumference) | (D) Type II-Neck Opening (Circumference) |
|---|---|---|---|---|
| XX-Small (26-28) | 14 | 27-1/4 | 13-1/2 | 21 |
| X-Small (30-32) | 16 | 29-1/4 | 14-1/2 | 22 |
| Small (34-36) | 18 | 30-1/4 | 16-1/2 | 24 |
| Medium (38-40) | 20 | 31-1/4 | 18-1/2 | 26 |
| Large (42-44) | 22 | 33-1/4 | 20-1/2 | 28 |
| X-Large (46-48) | 24 | 33-1/4 | 22 | 29-1/2 |
| XX-Large (50-52) | 26 | 34-1/4 | 23 | 30-1/2 |
| XXX-Large (54-56) | 28 | 34-1/4 | 24 | 31-1/2 |
| Tolerance (inches) | ± 1/2 | ± 1 | ± 1 | ± 1 |

1/ Unless otherwise specified the undershirt shall be laid flat and smooth when the measurements are taken. The methods of measuring referenced below and in Figure 1 shall be taken as follows:

(A) Half Width. The measurement is taken two inches below the armhole, from folded edge to folded edge across chest.

(B) Length. The measurement is taken across the front, from the high point shoulder at collarette seam to the bottom of the shirt.

(C) and (D) Neck Opening. Twice the measurement taken by grasping the collarette at center back and center front to form a straight edge, and measuring along folded seam to folded seam with collarette relaxed.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

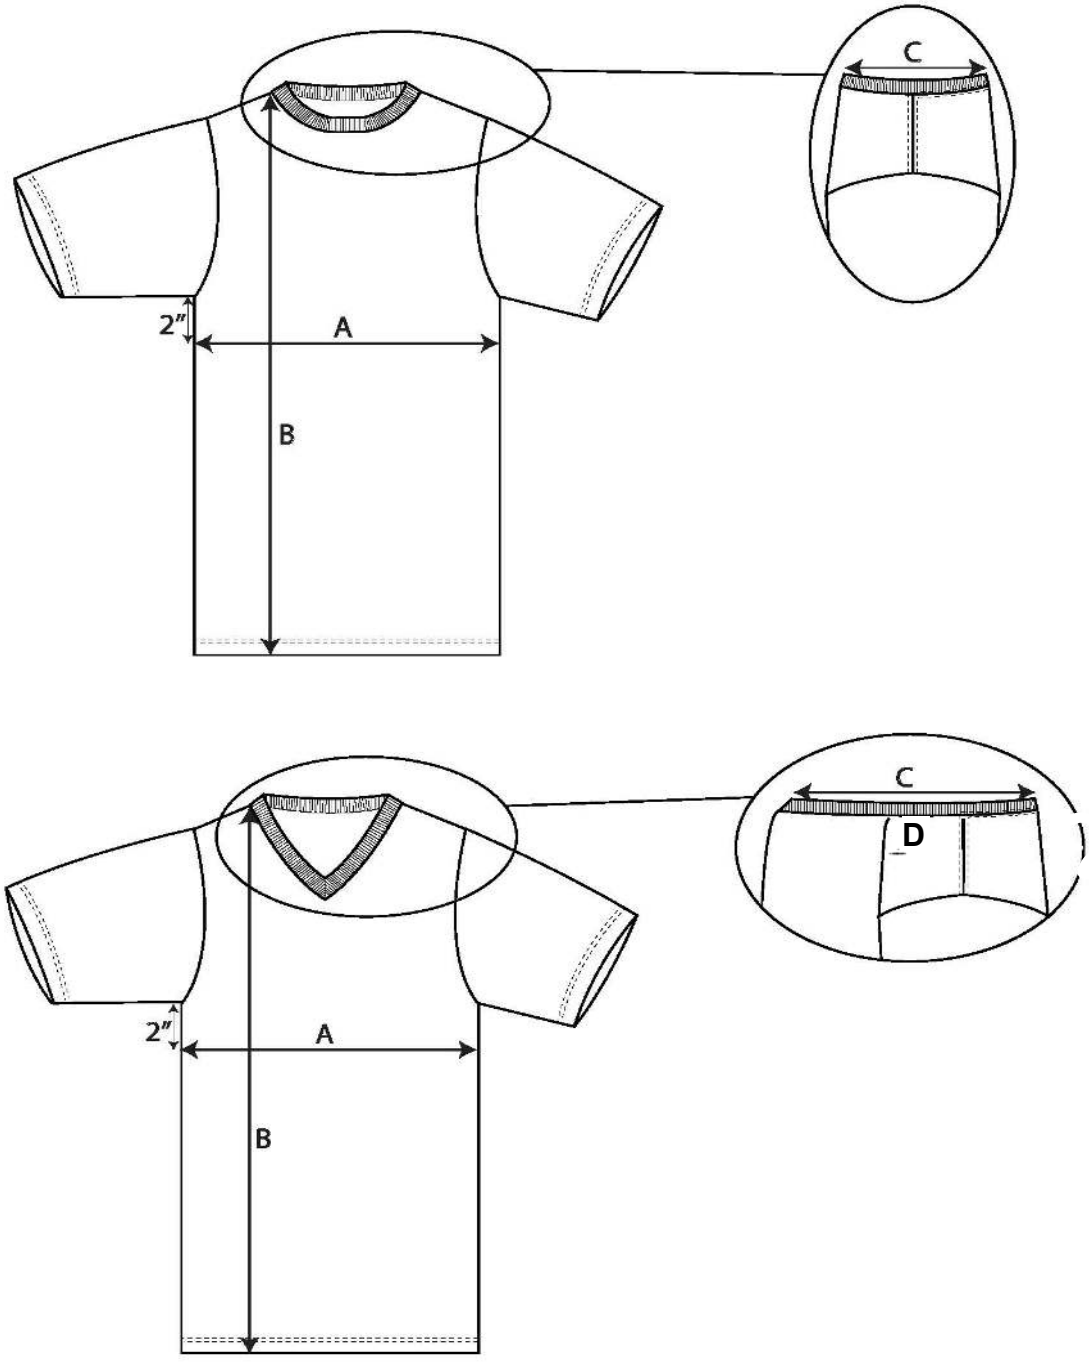



FIGURE 1. Crew Neck and "V-Neck" Undershirt Methods of Measuring – Types I and I .



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

3.7 Toxicity. Unless otherwise specified in the contract or procurement documents, the cloth used on the finished undershirt shall not present a health hazard and shall show compatibility with prolonged, direct skin contact when tested as specified in 3.7.1.

3.7.1 Toxicity test. When the toxicity requirement (see 3.7) can be demonstrated with historical use data, on the finishing treatments used, toxicity testing may not be required (see 7.1.4 and 7.8).

3.8 Workmanship. The finished undershirt shall conform to the quality of product established in this document. The undershirts shall be free from defects which would affect its serviceability, appearance, uniformity, and quality assurance standards defined by the technical data in the bid package.

4. REGULATORY REQUIREMENTS. Unless otherwise specified, the offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR), or the sustainable acquisition of EO 13693; as applicable (see 7.1.2 and 7.1.3).

5. PRODUCT CONFORMANCE PROVISIONS.

5.1 Product conformance. The undershirts shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product that is offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance.

5.2 Market acceptability. The undershirt offered, or generic equivalent, must have been sold to the Government or the commercial market.

5.3 Visual examination. Each undershirt shall be examined for the defects listed in Table IV in accordance with ASQ/ANSI Z1.4. Material defects shall be as defined in MIL-STD-1491 and ASTM D3990. The lot size shall be expressed in units of undershirts. The sample unit shall be one (1) undershirt.

TABLE IV. Visual examination defects.

| |
|---|
| Material defects:<br>Any hole, cut, tear, permanent fold, mend, pleat, or crease, loose course, miss knit, slub, thin area; any spot or stain on outside, streak, discoloration or color not as specified, any outwardly visible shaded part; knitted in waste, any serious material defects or objectionable odor. |
| Stitches, seams and stitching:<br>Loose or tight stitching tension, broken or skipped stitches, needle chew, any part caught in an unrelated operation or stitching, raw edge, thread ends not removed, any seam slippage, re-stitching, pleating or puckering; open, pulled or snagged stitches, twisted, ragged or inconsistent edge. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

TABLE IV. Visual examination defects. – Continued

| |
|---|
| Workmanship:<br>Any component part omitted, twisted, not specified size, missing, misplaced or distorted parts; poorly shaped, any dimension of item not as specified; neck stretched or loose; design not as specified. Failure to meet product conformance; serviceability, reliability and quality of materials as defined by this document. |
| Labels:<br>Label(s) missing, incorrect, or illegible; bar code or UCP code label omitted or not readable by scanner; human-readable interpretation (HRI) omitted or illegible; bar code not visible on folded packaged item, bar code label causes damage to the item. |
| Packaging:<br>Not packaged in accordance with the contract or purchase order. |

5.4 Dimensional examination. The finished undershirt shall conform to the dimensions specified in Table III when measured as stated. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one (1) undershirt.

5.5 Acceptance criteria. Acceptance criteria shall be as specified in the contract or purchase order (see 7.5).

6. PACKAGING. The preservation, packing and marking shall be as specified in the contract or purchase order (see 7.5).

7. NOTES.

7.1 Source of Government documents:

7.1.1 Copies of Government documents are available online at https://quicksearch.dla.mil.

7.1.2 EPA and EO 13693 information is available online at https://www.epa.gov.

7.1.3 Federal Acquisition Regulations (FAR) are available online at https://acquisition.gov.

7.1.4 Toxicity testing. If dermal toxicity testing is required, it will be conducted in accordance with Title 40, Protection of Environment, Code of Federal Regulations current edition and applicable sections, which are also consistent with the following OECD tests:

Skin Sensitization 406 and Dermal Irritation 404 (https://www.oecd-ilibrary.org/environment/oecd-guidelines-for-the-testing-of-chemicals-section-4-health-effects_20745788?page=1).

Dermal Sensitization (https://www.law.cornell.edu/cfr/text/40/798.4100).
Dermal Toxicity (https://www.law.cornell.edu/cfr/text/40/798.2250).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

7.2 Source of non-Government documents.

7.2.1 AATCC Test methods are available for purchase online at https://aatcc.org.

7.2.2 ASTM Standards are available for purchase online at https://www.astm.org.

7.2.3 ASQ/ANSI Z1.4 - Sampling Procedures and Tables for Inspection by Attributes is available online at https://www.asq.org.

7.2.4 SAE INTERNATIONAL: Standards are available for purchase online at https://standards.sae.org/amsstd595/.

7.3 Intended use. The item is intended to be used as an undershirt by military personnel.

7.4 Standard samples. For access to standard shade samples of cloth and threads, address the contracting activity issuing the invitation for bids or request for proposal.

7.5 Ordering data. The contract or order should specify the following:

a. Title, number, and date of this CID
b. Type, class and size required (see 2.1, 2.2 and 2.3)
c. Color required (see 2.2 and 3.2.2)
d. When antimicrobial treatment is required (see 3.2.4)
e. When toxicity testing is required (see 3.7)
f. Product conformance provisions (see 5.1)
g. Acceptance criteria (see 5.5)
h. Packaging requirements (see 6.)

7.6 National Stock Number (NSNs). The following is a list of NSNs assigned that correspond to this CID. This list may not be indicative of all possible NSNs associated with the CID.

| NSN | Type | Color | Size |
|---|---|---|---|
| 8420-00-543-6643 | Type I | White | XX-Small |
| 8420-01-194-0914 | Type II | White | XX-Small |
| 8420-01-112-1472 | Type I | Coyote Brown 3760 | XX-Small |
| 8420-01-661-3180 | Type I | Tan 499 | XX-Small |

7.7 Visual shade matching. In 2017, Option A of AATCC Evaluation Procedure 9, Visual Assessment of Color Difference of Textiles was changed to Option C. NOTE: In case of confusion, the viewing geometry should be "The specimen plane and illumination source will be parallel to each other and aligned so that the light flux is incident at the center of the specimen plane, which is set at a 35 (± 5º) angle relative to the horizontal. The observer will view the specimens at a 90º angle, relative to the plane of the specimens".

7.7.1 In 2022, the U.S. Military (all Services) accepted D65 as the new preferred light source for visual shade matching due to the supply chain issues with D75.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

7.8 Certificate of compliance. The contracting activity may select to accept a certificate of compliance for a stated requirement.

7.9 Changes from previous documents. The colors deleted and added are as follows:

Class 2 – Foliage Green 504 (DELETED)
Class 5 – Navy Blue 3388 (DELETED)
Class 6 – Brown 436 (DELETED)
Class 10 – Brown 3759 (DELETED)
Class 11 – Coyote Brown 3760 (ADDED)
Class 12 – Olive Drab OD 522 (ADDED)

7.10 Key words.

Knit
T-shirt

THIS SPACE INTENTIONALLY LEFT BLANK



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

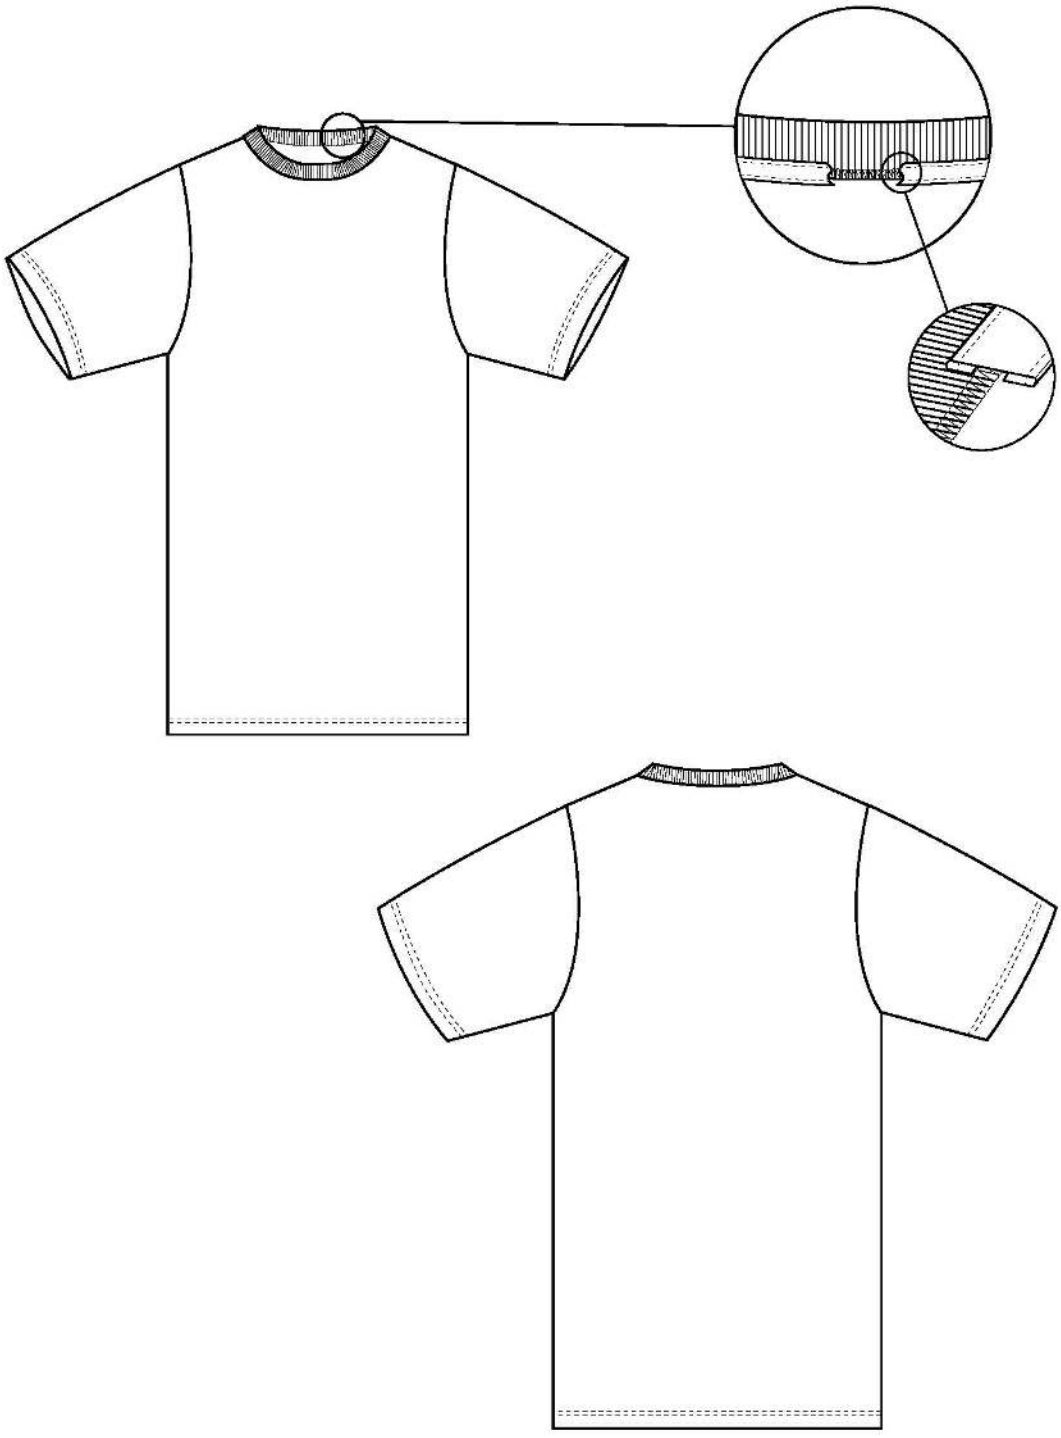


FIGURE 2. Crew Neck Undershirt, Front and Back View - Type I.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

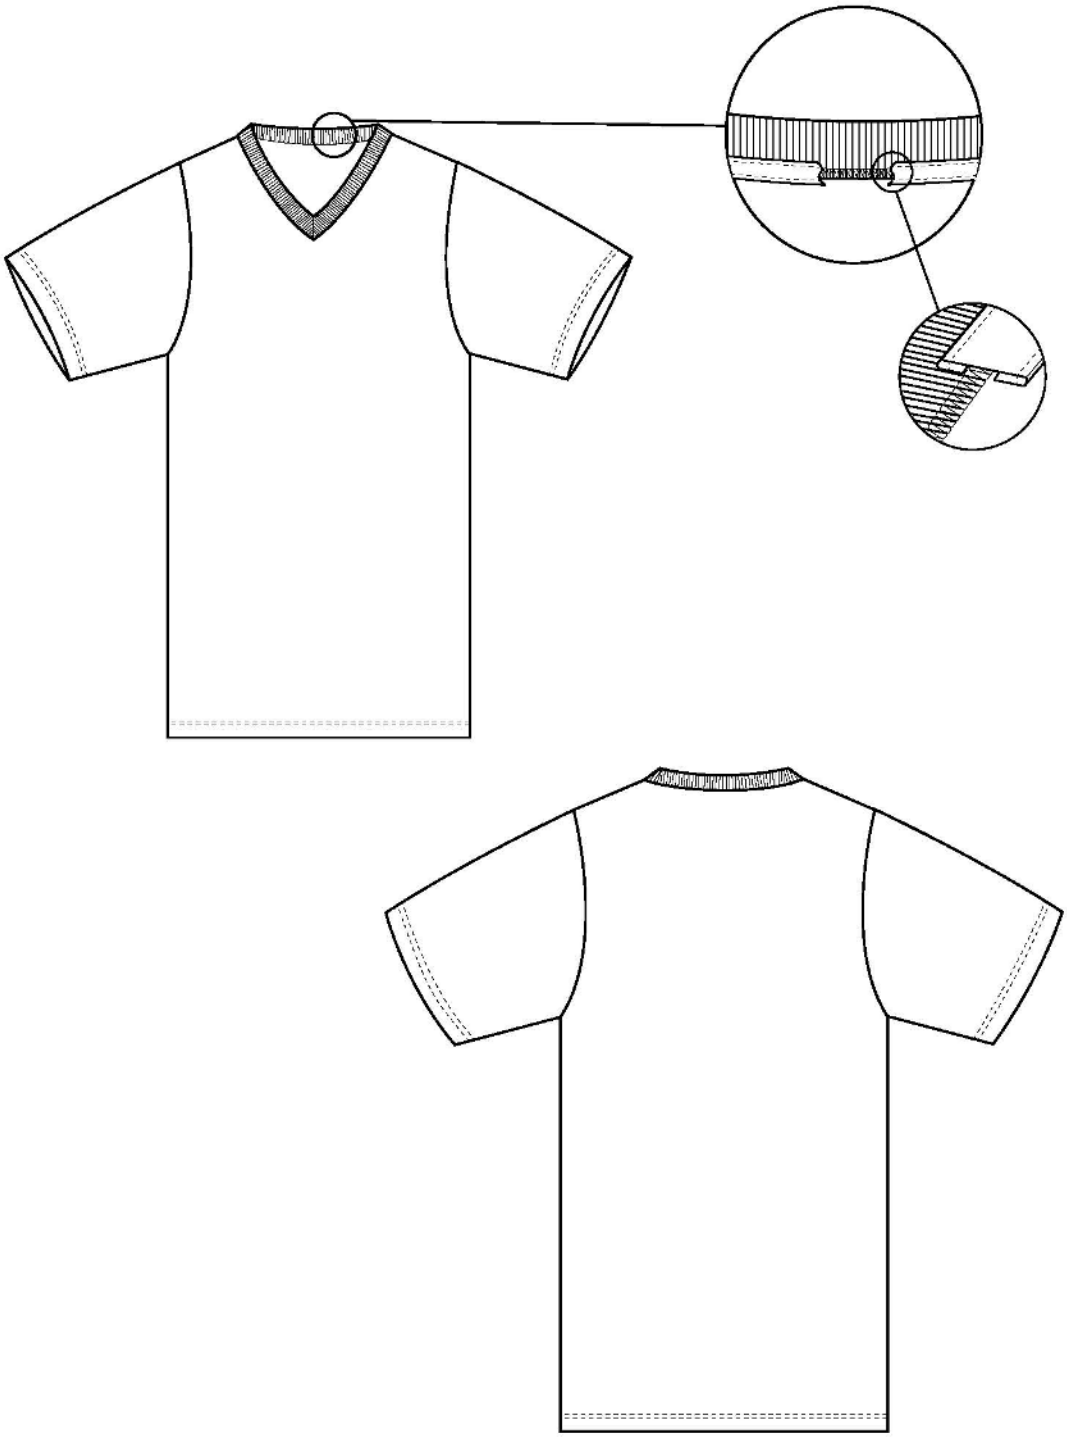


FIGURE 3. "V" Neck Undershirt, Front and Back View - Type II.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Army - GL
Navy - NU
Air Force - 11

Review activities:
Navy – CG1, MC

CIVIL AGENCY COORDINATING ACTIVITY:
GSA – FAS

Preparing Activity:
DLA-CT

(Project: 8420-2024-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.