H–B–681b

FEBRUARY 15, 1956

SUPERSEDING
Int. Fed. Spec. H–B–00681a (GSA–FSS)
21 April 1954, and
Fed. Spec. H–B–681a
27 July 1950

FEDERAL SPECIFICATION

BRUSHES, TYPEWRITER

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. — This specification covers brushes for dusting typewriters and for cleaning the type faces of typewriters.

1.2 Classification.

1.2.1 *Styles and classes.*—Typewriter cleaning brushes covered by this specification shall be of the following styles and classes as specified:

Machine-dusting (see fig. 1):

Style C.—Cone-shape, wire-handle.
Class 1.—Bristle.
Class 2.—Synthetic filament.

Style P.—Paintbrush-shape, wood-handle.
Class 1.—Bristle.
Class 2.—Synthetic filament.

Style PP.—Paintbrush-shape, plastic-handle.
Class 2.—Synthetic filament.

Style PW.—Paintbrush-shape, wire-handle.
Class 1.—Bristle.
Class 2.—Synthetic filament.

Type-cleaning (see fig. 2):

Style PSW.—Paintbrush-shape, short-wood-handle.
Class 1.—Bristle.
Class 2.—Synthetic filament.

Style PSP.—Paintbrush-shape, short-plastic-handle.
Class 2.—Synthetic filament.

Style PLP.—Paintbrush-shape, long-plastic-handle.
Class 2.—Synthetic filament.

Style T.—Toothbrush-shape, wood-handle.
Class 2.—Synthetic filament.
Class 3.—Horsetail hair.

Style TP.—Toothbrush-shape, plastic-handle.
Class 2.—Synthetic filament.

Style TW.—Cylinder-shape, wire-handle.
Class 1.—Bristle.
Class 2.—Synthetic filament.

1.2.2 *Color of filler (class 2 only).* — The color of the synthetic filaments covered by this specification shall be black or natural, as specified in the invitation for bids.

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 There are no other specifications and standards applicable to this specification except those referenced in section 7.

(Activities outside the Federal Government may obtain copies of Federal Specifications and Standards as outlined under General Information in the Index of Federal Specifications and Standards and at the prices

362248—56—No. 187

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:07Z
Check the source to verify that this is the current version before use.

indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, Seattle, and Washington, D. C.

(Federal Government activities may obtain copies of Federal Specifications and Standards and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

3. REQUIREMENTS

3.1 Standard sample. — Class 3, style "T" brush and all class 2 brushes shall be equal to the standard sample in workmanship and balance in stiffness, solidity, kind, and quality of the hair or synthetic filament, and in other respects not specifically covered in this specification. (See 6.1 and 6.2.)

3.2 Design. — The brushes shall be of the general designs illustrated in figures 1 and 2.

3.2.1 *Ferrules.*—All style brushes shall have a soldered, interlocked, or welded ferrule except machine-dusting, style PP, which may have a round seamless ferrule, and type-cleaning, style PLP, which shall have a round seamless ferrule.

3.3 Style C, cone-shape, wire-handle, for machine dusting.

3.3.1 *Construction.* — The bristle or synthetic filament shall be secured within twisted galvanized steel wires or equally rust-resistant wires which shall also form the handle of the brush. The hand end of the handle shall have a loop. The bristles or filaments shall be approximately parallel to each other and at an angle of approximately 90 degrees to the wire. The bristles or filaments shall be evenly distributed on the brush head and shall be tapered to the brush-head tip. (See fig. 1.)

3.3.2 *Brush material.*

3.3.2.1 *Bristle.* — The bristle shall be stiff hog bristle of uniform length.

3.3.2.2 *Synthetic filament.* — The synthetic filament shall be black or natural as specified, and shall be of a stiffness suitable for the purpose intended. The filament shall conform to the following requirements when tested as described in 4.3.2:

Melting point, minimum, 212°C.

Specific gravity, maximum, 1.1.

Loss of weight on heating for 8 hours in air at 100°C., maximum, 0.3 percent.

Moisture absorption at 50 percent relative humidity and 25°C., maximum, 2.0 percent, as measured on samples dried to constant weight at 70°C.



Style C, cone-shape




Styles P and PP, paintbrush-shape



Style PW, paintbrush-shape

FIGURE 1.—Machine-dusting brushes.

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T11:07Z
Check the source to verify that this is the currentversion before use.

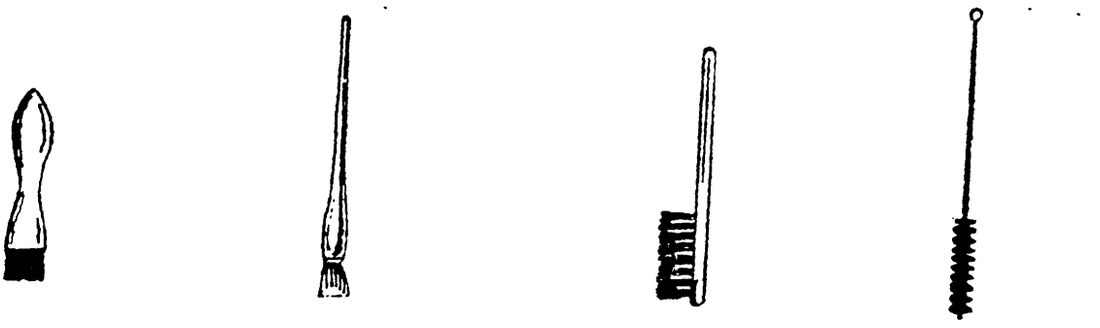

Styles PSW and PSP, paintbrush-shape | Style PLP paintbrush- shape | Styles T and TP, toothbrush-shape | Style TW, Cylinder-shape

FIGURE 2.—Type-cleaning brushes.

3.3.2.2.1 *Fastness to boiling water, and stiffness.* — The synthetic filament shall withstand being immersed in boiling water for 5 minutes without showing marked discoloration or bleeding. It shall show no appreciable change in stiffness after being removed from the boiling water and drying at 70°C. for 3 hours.

3.3.2.2.2 *Fastness to light.*—The synthetic filament shall show no marked discoloration after being exposed to the radiation from a sun lamp when tested as described in 4.3.2.6.

3.3.3 *Physical requirements.*—The brushes shall conform to the physical requirements in table I.

TABLE I.—*Minimum physical requirements for style C brushes*

Length, over-all ..... inches..	11½
Brush head:	
Length ..... inches..	3¾
Length before taper ..... do..	2¾
Diameter before taper ..... do..	1½
Diameter at tip ..... inch..	½
Bristle or synthetic filament:	
Weight of bristle in finished brush.. ounce..	7/64
Weight of synthetic filament in finished brush ..... do..	9/64
Diameter of synthetic filament ..... inch..	0.012
Wire (twisted):	
Diameter, single strand ..... do..	0.072

3.4 Style P, paintbrush-shape, wood-handle, and style PP, paintbrush-shape, plastic-handle, for machine dusting.

3.4.1 *Construction.* — The brush filler shall be set in a ferrule attached to a handle, or secured by crimping a round metal ferrule around the filler. The brush head shall have a flare (see fig. 1).

3.4.2 *Brush material.*

3.4.2.1 *Bristle (style P only).*—The bristle shall be stiff hog bristle and shall be laid so as to form a solid square or flat top.

3.4.2.2 *Synthetic filament (styles P and PP).*—The synthetic filament shall meet the requirements as specified in 3.3.2.2.

3.4.3 *Ferrule.*—The ferrule shall be of noncorrosive metal or of metal made corrosion-resistant. The handle end shall be round, the brush end oval. Ferrule shall be soldered, interlocked, or welded, or shall be a round seamless ferrule, as specified.

3.4.4 *Handles.*

3.4.4.1 *Wood.*—Wooden handles shall be of hardwood of the standard artist type. The handle shall be securely fastened to the ferrule by punching, pinning, or swedging. The handle shall be smoothly finished in lacquer or paint.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:07Z
Check the source to verify that this is the current version before use.

3.4.4.2 *Plastic.*—Plastic handles shall be of cellulose acetate, of the standard artist type. The handle shall be securely fastened in the ferrule, or the assembly of tuft and ferrule can be slip fitted into the handle. The handles shall have a smooth finish.

3.4.5 *Set.*—The butt ends of the bristle or the synthetic filament shall be vulcanized in hard rubber or set in a suitable setting compound which will not become brittle, or shall be securely held by clamping with the ferrule.

3.4.6 *Physical requirements.* — The brushes shall conform to the requirements in table II.

TABLE II.—*Minimum physical requirements for styles P and PP brushes*

Length, over-all .....inches..	11¾	7¼*
Bristle or synthetic filament:		
Length clear of ferrule .....do..	1½	1¾*
Hold in ferrule .....inch..	⅝	⅛*
Width, brushing surface ....do..	⅞	1*
Weight of bristle in finished brush .....ounce..	5/32	...
Weight of synthetic filament in finished brush .....do..	7/64	3/64*
Diameter of synthetic filament inch..	0.012	0.010*
Ferrule:		
Depth .....inches..	1¾	¼*
Thickness of metal .....inch..	0.009	0.030*
Diameter, handle end, outside do..	⅜	5/16*
Diameter, brush end, outside do..	...	¼*
Dimensions of oval, brush end do..	⅝ x ¼	...
Handle:		
Length clear of ferrule ..inches..	8	6½*

* Requirements for style PP with round seamless ferrule (removable from handle).

3.5 Style PW, paintbrush-shape, wire-handle, for machine dusting.

3.5.1 *Construction.* — The bristle or synthetic filament shall be secured within twisted galvanized steel wires or equally rust-resistant wires which shall also form the handle of the brush. In addition, the bristle or synthetic filament shall be secured within a ferrule. The hand end of the handle shall have a loop. The brush head shall be oval and shall have a flare. (See fig. 1.)

3.5.2 *Brush material.*

3.5.2.1 *Bristle.* — The bristle shall be stiff hog bristle which shall be full, of even length, laid straight, shall show no tendency to separate at the end, and shall have a good spring.

3.5.2.2 *Synthetic filament.* — The synthetic filament shall meet the requirements as specified in 3.3.2.2.

3.5.3 *Ferrule.*—The ferrule shall be of noncorrosive metal or of metal made corrosion-resistant. The handle end of the ferrule shall be securely clinched and soldered to the wire handle. Ferrules shall be soldered, interlocked, or welded.

3.5.4 *Physical requirements.* — The brushes shall conform to the requirements in table III.

TABLE III.—*Minimum physical requirements for style PW brushes*

Length, over-all .....inches..	10½
Bristle or synthetic filament:	
Length clear of ferrule .....do..	1½
Width, brushing surface .....inch..	⅞
Weight of bristle in finished brush ounce..	5/32
Weight of synthetic filament in finished brush .....do..	7/64
Diameter of synthetic filament ...inch..	0.012
Ferrule:	
Depth ..... inches..	1¾
Thickness of metal .....inch..	0.012
Dimensions of oval brush end .....do..	⅝ x ¼
Handle:	
Length clear of ferrule .....inches..	7¾
Wire (twisted):	
Diameter, single strand .....inch..	0.072

3.6 Style PSW, paintbrush-shape, short-wood-handle, for type cleaning.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:07Z
Check the source to verify that this is the current version before use.

3.6.1 *Construction.* — The bristle or synthetic filament shall be staple-set in a wooden block which shall also serve as a handle. (See fig. 2.)

3.6.2 *Brush material.*

3.6.2.1 *Bristle.* — The bristle shall be stiff hog bristle, and after the bristle is set in the block, the brush shall be trimmed to a square top.

3.6.2.2 *Synthetic filament.* — The synthetic filament shall meet the requirements as specified in 3.3.2.2.

3.6.3 *Block.*—The block shall be of close-grained hardwood, smoothly finished. The sides of the block shall be rounded. The block shall have holes for staple-setting of the bristle.

3.6.4 *Staples.*—The staples shall be made of liquor-finished steel wire or similar corrosion-resistant steel wire.

3.6.5 *Physical requirements.* — The brushes shall conform to the requirements in table IV.

3.7 Style PSP, paintbrush-shape, short-plastic-handle, for type cleaning.

3.7.1 *Construction.*—Synthetic filaments shall be staple-set in a plastic block which shall also serve as a handle. (See fig. 2.)

3.7.2 *Brush material.*

3.7.2.1 *Synthetic filament.* — The synthetic filament shall meet the requirements as specified in 3.3.2.2.

3.7.3 *Block.* — The block shall be of cellulose acetate, smoothly finished.

3.7.4 *Staples.*—The staples shall be liquor-finished steel wire or similar corrosion-resistant steel wire.

3.7.5 *Physical requirements.* — The brushes shall conform to the requirements in table IV.

TABLE IV.—*Minimum physical requirements of styles PSW and PSP brushes*

Length, over-all ..... inches..	5 5/16
Bristle or synthetic filament:	
Length clear of block ..... inch..	9/16
Weight of bristle in finished brush ..... ounce..	1/16
Weight of synthetic filament in finished brush ..... do..	1/16
Diameter of synthetic filament... inch..	0.012
Block:	
Length ..... inches..	4 5/8
Width, widest part, hand end .... inch..	7/8
Width, brush end ..... inches..	1 1/16
Thickness ..... inch..	15/32
Number of holes	10
Diameter of holes ..... inch..	1/8
Staples:	
Diameter ..... do..	0.0230

3.8 Style PLP, paintbrush-shape, long plastic-handle, for type cleaning.

3.8.1 *Construction.*—The synthetic filament shall be secured in the ferrule by crimping the metal ferrule around the filament in such a manner as to create a flare in the filament.

3.8.2 *Brush material.*

3.8.2.1 *Synthetic filament.* — The synthetic filament shall meet the requirements as specified in 3.3.2.2.

3.8.3 *Ferrule.*—The ferrule shall be of non-corrosive metal or of a metal made corrosive resistant, and shall be of a round seamless type shaped to slip-fit into the handle.

3.8.4 *Handle.*—The handles shall be of cellulose acetate, of the standard artist type, with an open end to receive the handle.

3.8.5 *Set.*—The butt ends of the synthetic filaments shall be securely held in the ferrule by crimping the ferrule around the filament.

3.8.6 *Tuft.* — The synthetic filament tuft shall be wedge-shaped, formed by a gradual tapering of 1/8 inch from the center filaments down to the outer filaments on two sides of the tuft.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:07Z
Check the source to verify that this is the current version before use.

3.8.7 *Physical requirements.* — The brushes shall conform to the requirements in table V.

TABLE V.—*Minimum physical requirements of style PLP brushes*

Length, over-all ..... inches..	6¼
Synthetic filaments:	
Length clear of ferrule (longest) .. inch..	1 1/16
Length clear of ferrule (shortest) .. do..	9/16
Hold in ferrule ..... do..	⅛
Width, brushing surface ..... do..	½
Weight of synthetic filament in finished brush ..... ounce..	3/64
Diameter of synthetic filament ... inch..	.014
Ferrule:	
Depth ..... inch..	¼
Thickness of metal ..... do..	.032
Diameter, handle end, outside ..... do..	⅜
Diameter, brush end, outside ..... do..	9/16
Handle:	
Length clear of ferrule ..... inches..	5½
Diameter, smallest part, hand end inch..	⅛
Diameter, brush end, outside ..... do..	7/16

3.9 Style T, toothbrush-shape, wood-handle, for type cleaning.

3.9.1 *Construction.* — The bristle or synthetic filament shall be staple-set perpendicularly in a wooden block which shall also serve as the handle. (See fig. 2.)

3.9.2 *Brush material.*

3.9.2.1 *Horsehair.* — The horsehair used in the brushes shall be extra stiff sterilised horsetail hair.

3.9.2.2 *Synthetic filament.* — The synthetic filament shall meet the requirements as specified in 3.3.2.2.

3.9.3 *Block* — The block shall be of close-grained hardwood, smoothly-finished. The ends of the blocks shall be rounded or slightly curved.

3.9.4 *Set* — The horsetail hair or synthetic filament shall be staple-set.

3.9.5 *Staples* – The staples shall be made of liquor-finished steel, or other corrosion-resistant steel.

3.9.6 *Physical requirements.* — The brushes shall conform to the requirements in table VI.

3.10 Style TP, toothbrush-shape, plastic-handle, for type cleaning.

3.10.1 *Construction.* — The synthetic filament shall be set perpendicularly in a plastic block which shall also serve as a handle. (See fig. 2.)

3.10.2 *Brush material.*

3.10.2.1 *Synthetic filament.*—The synthetic filament shall meet the requirements as specified in 3.3.2.2.

3.10.3 *Block.*—The block shall be of cellulose acetate, smoothly finished.

3.10.4 *Staples.* — The staples shall be of liquor-finished steel or similar corrosion-resistant steel wire.

3.10.5 *Physical requirements.*—The brushes shall conform to the requirements in table VI.

TABLE VI.—*Minimum physical requirements of styles T and TP brushes*

Length, over-all ..... inches..	6
Horsetail hair or synthetic filament:	
Length clear of block ..... inch..	⅝
Weight of horsetail hair in finished brush ..... ounce	1/32
Weight of synthetic filament in finished brush ..... do..	1/32
Diameter of synthetic filament ... inch	0.012
Block:	
Length ..... inches..	6
Width ..... inch..	1
Thickness ..... do..	3/4
Number of holes	38
Diameter of holes ..... inch..	0.082
Brushing surfaces:	
Total ..... square inch	¾
Width ..... inch..	½
Length ..... do..	1½

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:07Z
Check the source to verify that this is the current version before use.

3.11 Style TW, cylinder-shape, wire handle, for type cleaning.

3.11.1 *Construction.* — The bristle or synthetic filament shall be secured within twisted galvanized steel wires which shall also form the handle of the brush. The hand end of the handle shall have a loop. (See fig. 2.)

3.11.2 *Brush material.*

3.11.2.1 *Bristles.*—The bristles shall be stiff hog bristles and of uniform length.

3.11.2.2 *Synthetic filament.*—The synthetic filament shall meet the requirements as specified in 3.3.2.2.

3.11.3 *Physical requirements.*—The brushes shall conform to the requirements in table VII.

TABLE VII.—*Minimum physical requirements of style TW brushes*

Length, over-all ..... inches..	7½
Brush head:	
Length ..... do..	1½
Diameter ..... inch..	⅝
Bristle and synthetic filament:	
Weight of bristle in finished brush ounce..	½
Weight of synthetic filament in finished brush ..... do..	5/64
Diameter of synthetic filament ... inch..	0.012
Wire (twisted):	
Diameter, single strand ..... do..	0.072

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Sampling.—Two brushes shall be taken from each lot of 100 brushes or fraction thereof delivered.

4.2 Inspection.

4.2.1 The brushes shall be inspected to determine compliance with this specification with respect to material, workmanship, and, as applicable, size and finish of block, diameter and finish of wire and staples, diameter of filament, number and diameter of holes, solidity of bristle or filament in holes, dimensions of wire brushes, and length clear of blocks or ferrules.

4.2.2 Class 2 and class 3 brushes shall be compared with the standard sample with respect to the requirements of 3.1.

4.3 Tests.

4.3.1 *Weight of horsehair, bristle, or filament.*—The horsehair, bristle, or filament shall be removed from the brush, conditioned for not less than 16 hours in air at a relative humidity of 50 ± 4 percent and at a temperature of 73.5° ± 2°F. The weight of the horsehair, bristle, or filament shall be determined in the same atmosphere.

4.3.2 *Synthetic filament.*

4.3.2.1 *Measuring diameters.*—Not less than 10 synthetic filaments shall be measured. Two measurements shall be taken of each filament. Any micrometer caliper which is accurate to 0.0001 inch may be used.

4.3.2.2 *Melting point.*—A piece of synthetic filament approximately ⅛ inch long shall be placed in a capillary tube closed at the lower end. A thermometer (A.S.T.M. partial immersion E–1 (2c–39) (–5° to 300°C.)) shall be attached and immersed to proper depth in a bath at a temperature of approximately 20°C. lower than the expected melting point. The temperature shall be raised at a rate of approximately 3°C. per minute.

4.3.2.3 *Specific gravity.* — A 10-milliliter empty pycnometer shall be weighed and then filled with water and reweighed. About 0.5 to 1.0 gram of the synthetic filament in air shall be weighed, transferred to pycnometer, filled with water, and again weighed.

$$\frac{\text{Weight of specimen in air}}{\text{(Weight of specimen in air)} - \text{(weight of pycnometer plus specimen plus water)} + \text{(weight of pycnometer plus water)}} = \text{specific gravity}$$

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:07Z
Check the source to verify that this is the current version before use.

4.3.2.4 *Loss in weight in air.* — Approximately 5 grams of the synthetic filament shall be weighed and dried at 70°C. to constant weight in a weighing bottle (approximately 15 hours), transferred to an oven at 100°C. ± 1°C. and heated for 8 hours, removed and reweighed.

$$\frac{\text{Loss in weight}}{\text{Weight of synthetic filament (constant weight at 70°C.)}} \times 100 = \text{percent loss in weight at 100°C.}$$

The heated samples in this test shall be compared with the original material. Any significant changes in color or other physical properties, such as curling, etc., shall be noted.

4.3.2.5 *Moisture absorption.*—A sample of approximately 5 grams shall be weighed in a weighing bottle and dried to constant weight at 70°C. and the weight recorded in grams as dry weight. The weighing bottle plus sample shall be transferred with lid off, to an atmosphere which is kept at 50 ± 2 percent relative humidity and 25°C. ± 1°C. and allowed to remain in this atmosphere until constant weight is reached (this may take 5 to 6 days). The maximum weight in this atmosphere shall be recorded.

$$\frac{\text{Increase in weight}}{\text{Dry weight}} \times 100 = \text{percent increase}$$

4.3.2.6 *Fastness to light.*—Samples of synthetic filament (⅝ inch or longer) shall be mounted on cards approximately 1 inch wide and placed on a horizontal turntable. The filament shall be secured to the cards by mechanical means (without adhesives), and placed so that they are radial, and the inside ends are 3½ inches from the center of the disc. A phonograph disc may be used for this test. The bottom of the sun-lamp bulb (General Electric Type S–I, or equivalent) shall be mounted 7 inches above the center of the disc. The samples shall be exposed for 24 hours while the disc is rotated at the rate of 33 ± 2 revolutions per minute. At the end of this period the synthetic filament samples shall be examined for significant discoloration.

5. PREPARATION FOR DELIVERY

5.1 Packaging. — Unless otherwise specified, commercial packages will be acceptable.

5.2 Packing.—The subject commodity shall be prepared for shipment to permit acceptance by carrier for transportation at the lowest applicable rate, and to afford maximum protection from normal hazards of transportation.

5.3 Marking.

5.3.1 *Packages.*—Unless otherwise specified, packages shall have a label affixed, or be marked, with the name of the commodity, style, class, color of synthetic filament, the quantity contained therein, and the names of the contractor and manufacturer.

5.3.2 *Shipping containers.*—Unless otherwise specified, shipping containers shall be marked with the stock number, name of the commodity, the style, class, color of synthetic filament, the quantity contained therein, the name and address of the contractor and manufacturer, the number of the contract or order, the name and address of the consignee, and the gross weight.

6. NOTES

6.1 Ordering data.—Purchasers should specify the style, class, color of synthetic filament, the location at which standard samples may be seen, and should exercise any desired options offered herein. (See 1.2, 3.4.3, 5.1, 5.3 and 6.2.)

6.2 Standard sample.—The standard sample is a reasonable facsimile of the master standard sample on file at the National Bureau of Standards, Washington 25, D. C. It is not intended that the master standard sample shall be used for the purpose of purchase or inspection of brushes, but that the master standard sample will be used by Government agencies for comparison purposes to obtain a standard sample for their own use in purchase and inspection.

6.2.1 In order that uniform standards for brushes may be obtained among the various Government agencies, purchasers should for-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:07Z
Check the source to verify that this is the current version before use.

ward brushes to the National Bureau of Standards for inspection and its opinion in order to obtain a standard sample equal to the master standard sample; the standard sample should then be preserved by the purchaser and used in the purchase and inspection of brushes obtained under this specification.

6.3 Transportation description.—Transportation description applicable to this item is:

Brushes, not otherwise indexed by name.
Carload weight 24,000 pounds, subject to Rule 34, Uniform Freight Classification.
Truckload weight 24,000 pounds.

Patent notice.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

7. DEPARTMENTAL REQUIREMENTS

7.1 The following specifications and standard of the issues in effect on date of invitation for bids, and special requirements, form a part of this specification for purchases made under this specification by the respective departments.

7.2 Army, Navy, and Air Force.

7.2.1 *Applicable specifications and standard:*

Federal Specifications:

UU–P–268—Paper, Kraft, Wrapping.
LLL–B–631—Boxes, Fiber Corrugated (for Domestic Shipment).
LLL–B–636—Boxes, Fiber, Solid (for Domestic Shipment).
PPP–B–566—Boxes, Folding, Paperboard.
PPP–B–676—Boxes, Set-Up, Paperboard.

Military Specifications:

JAN–P–108—Packaging and Packing for Overseas Shipment — Boxes, Fiberboard (V-Board and W-Board), Exterior and Interior.
MIL–B–4229—Boxes; Paperboard, Metal-Stayed.

Military Standard:

MIL–STD–129—Marking for Shipment and Storage.

(Copies of specifications, standards, and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

7.2.2 *Packaging.*

7.2.2.1 *For domestic shipment (immediate use).* — Unless otherwise specified, commercial packages will be acceptable.

7.2.2.2 *For domestic shipment (storage) and overseas shipment.*—The fillers of each type of typewriter brush shall be individually wrapped in kraft paper conforming to Federal Specification UU–P–268, grade A, having a minimum basis weight of 60 pounds (24 x 36—500). The wrapper shall be held in place with twine or a rubber band. The wrapper shall be applied in such a manner as to protect the fillers from distortion or damage. Twelve brushes of one type and size shall be packaged in folding boxes or set-up boxes conforming to Military Specification MIL–B–4229, or Federal Specification PPP–B–676, respectively. When typewriter brushes are comprised of animal fillers, each box shall contain not less than 3 balls of naphthalene or an equivalent quantity of flake naphthalene or other suitable moth repellent.

7.2.3 *Packing.*

7.2.3.1 *For domestic shipment (immediate use).*—Brushes, packaged as described in 7.2.2.1, shall be packed in a manner which will insure acceptance and safe delivery at destination. The containers shall comply with the Consolidated Freight Classification Rules or to other carrier rules and regulations applicable to the mode of transportation.

7.2.3.2 *For domestic shipment (storage).*—Brushes of one type and size, packaged as described in 7.2.2.2, shall be packed in corrugated or solid fiberboard boxes conforming to the spe-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:07Z
Check the source to verify that this is the current version before use.

cial requirements of Federal Specifications LLL–B–631 and LLL–B–636, respectively. When sufficient quantities are available sixty boxes (720 brushes) shall be packed in one box.

7.2.3.3 *For overseas shipment.*—Brushes of one type and size, packaged as described in 7.2.2.2, shall be packed in fiberboard (V-board) boxes conforming to Military Specification JAN–P–108. When sufficient quantities are available 60 boxes (720 brushes) shall be packed in one box. Boxes shall be closed and sealed in accordance with the Appendix to Military Specification JAN–P–108.

7.2.4 *Marking.*—In addition to any special marking required by the contract or order, marking shall be in accordance with the applicable sections of Military Standard MIL–STD–129.

7.2.5 *Ordering data.* — Procurement documents should specify whether shipment is for domestic (immediate use) or domestic (storage) and overseas shipment (see 7.2.2 and 7.2.3).

MILITARY INTERESTS:
Army—Q
Navy—S MC
Air Force.

Copies of this specification may be purchased for 15 cents.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:07Z
Check the source to verify that this is the current version before use.