
MILITARY SPECIFICATION SHEET

RETAINER (BASE), AND ADAPTER, ELECTRON TUBE, HEAT DISSIPATING, 7 AND 9 PIN, MINIATURE

The complete requirements for procuring the retainer (base) or adapter described herein shall consist of this document and the latest issue of Specification MIL-S-24251.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

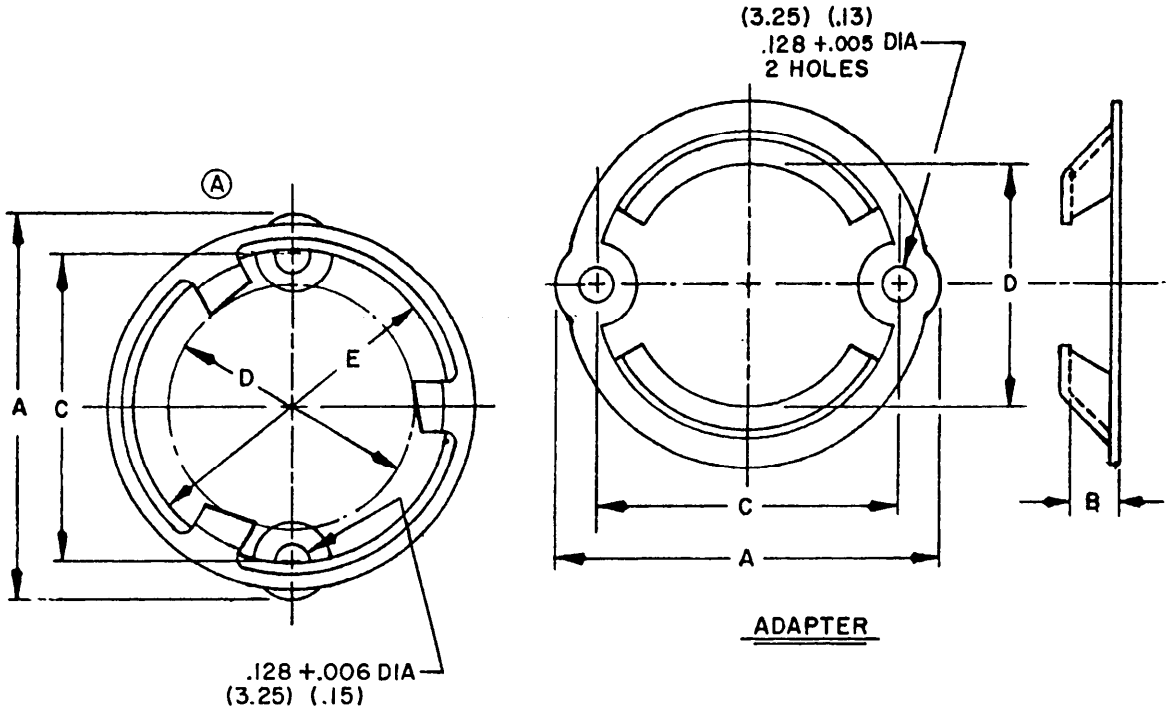

ADAPTER

Ⓐ denotes changes

FSC 5960

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:43Z
Check the source to verify that this is the current version before use.

Ⓐ Characteristics.

Dash no.	Mounting	A max	B	C±.010 (.25)	D	E±.010 (.25)	Weight grams max	Tube socket (ref)	Shield (ref)
1	Retainer 1/	1.140 (28.96)	0.427±.010 (10.85±.25)	0.875 (22.23)	0.790±.010 (20.07±.25)	.879 (22.33)	7.5	MIL-S-12883/10	M24251/3-1 thru 3 and M24251/5-1 thru -3
2	Retainer 1/	1.390 (35.31)	.427±.010 (10.85±.25)	1.125 (28.58)	.905±.010 (22.99±.25)	1.000 (25.40)	8.0	MIL-S-12883/11	M24251/3-4 thru 7 and M24251/5-4 thru -6
3	Retainer 2/	1.140 (28.96)	.085±.005 (2.16±.13)	.875 (22.23)	.656±.031 (16.66±.79)		1.5	MIL-S-12883/2	M24251/3-1 thru 3 and M24251/5-1 thru -3
4	Retainer 2/	1.390 (35.31)	.075±.005 (1.91±.13)	1.125 (28.58)	.750±.031 (19.05±.031)		3	MIL-S-12883/3	M24251/3-4 thru 7 and M24251/5-4 thru -6

1/ Where it is desired to use retainer -1 or -2 with electron tube socket MIL-S-12883/2 or MIL-S-12883/3 it is necessary to replace the shield base on the above sockets with the applicable adapter.

2/ Not recommended for new design.

NOTES:

1. All dimensions are in inches.
2. Millimeters are in parentheses.
3. Metric equivalents (to the nearest .01 mm) are given for information only and are based upon 1 inch = 25.4 mm.
Ⓐ 4. Unless otherwise specified, tolerance is 2 places ±.010 (.25 mm); 3 places ±.005 (.13 mm).
5. Lugs - Dash 1 has 3 lugs, equally spaced.
Dash 2 has 4 lugs, equally spaced.
6. MIL-S-24251/4 (retainer (base) and adapter) was formerly MS24231 (USAF), 29 Jan 1958.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:43Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

The retainer (base) and adapter and other parts, as shown in the figure, shall be designed to meet the requirements of MIL-S-24251, and to fit the shield and tube socket specified in table.

Dimensions and configuration: See figure and table.

Retainer (base):


Material-Brass, sheet, .035 thick, QQ-B-613, composition 2, annealed or aluminum alloy QQ-A-591.
Finish-Black cadmium plate, QQ-P-416, class 1, type II, optional finish: Henderlube or equal, chromate MIL-C-5541.

Adapter:

Material-Brass, sheet, .015 thick on -3 and .025 thick on -4, QQ-B-613, composition 2, annealed.
Finish-Black cadmium plate, QQ-P-416, class 3, type II, optional finish: Henderlube or equal.

The part number consists of the basic number of this specification sheet, preceded by the letter "M", and a dash number taken from table.

Example:



Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - EL
Navy -
Air Force - 11, 17, 85
DSA - ES

User activities:
Army - MU
Navy - MC, CG
Air Force - 19

Preparing activity:
Navy - EC

(Project 5960-2313-5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:43Z
Check the source to verify that this is the current version before use.