INCH-POUND

MIL-DTL-24251/4C
15 February 2008
SUPERSEDING
MIL-DTL-24251/4B
14 May 2003

DETAIL SPECIFICATION SHEET

RETAINER (BASE),AND ADAPTER, ELECTRON TUBE, HEAT DISSIPATING, 7 AND 9 PIN, MINIATURE

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-24251.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

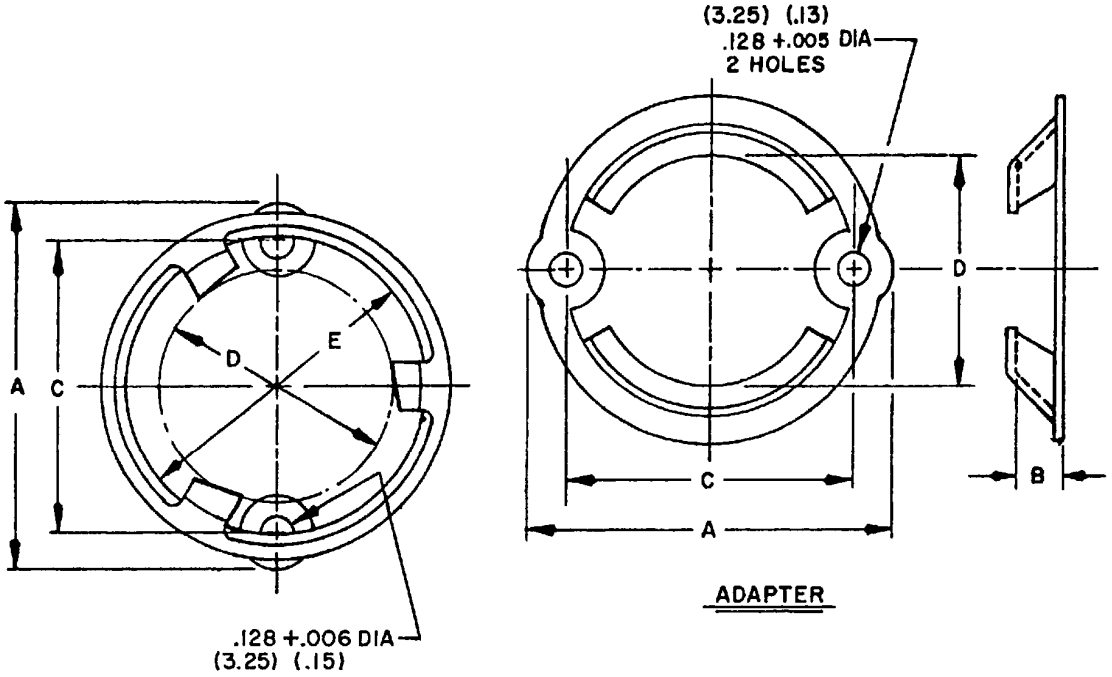

NOTES:
1. All dimensions are in inches.
2. Millimeters are in parentheses.
3. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. Unless otherwise specified, tolerance is 2 places ± .010 (0.25 mm); 3 places ± .005 (0.13 mm).
5. Lugs: Dash 1 has 3 lugs, equally spaced.
   Dash 2 has 4 lugs, equally spaced.
6. MIL-DTL-24251/4 (retainer (base) and adapter) was formerly MS24231 (USAF), 29 Jan 1958.

FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:42Z
Check the source to verify that this is the current version before use.

TABLE 1. Characteristics.

Dash no.	Mounting	A max	B	C ±.010 (0.25)	D	E ±.010 (0.25)	Weight grams max	Tube socket (ref)	Shield (ref)
1	Retainer 1/	1.140 (28.96)	.427 ± .010 (10.85 ± 0.25)	.875 (22.23)	.790 ± .010 (20.07 ± 0.25)	.879 (22.33)	7.5	MIL-DTL-12883/10	M24251/3-1 through -3 and M24251/5-1 through -3
2	Retainer 1/	1.390 (35.31)	.427 ± .010 (10.85 ± 0.25)	1.125 (28.58)	.905 ± .010 (22.99 ± 0.25)	1.000 (25.40)	8.0	MIL-DTL-12883/11	M24251/3-4 through -7 and M24251/5-4 through -6
3	Retainer 2/	1.140 (28.96)	.085 ± .005 (2.16 ± 0.13)	.875 (22.23)	.656 ± .031 (16.66 ± 0.79)		1.5	MIL-DTL-12883/2	M24251/3-1 through -3 and M24251/5-1 through -3
4	Retainer 2/	1.390 (35.31)	.075 ± .005 (1.91 ± 0.13)	1.125 (28.58)	.750 ± .031 (19.05 ± 0.31)		3.0	MIL-DTL-12883/3	M24251/3-4 through -7 and M24251/5-4 through -6

1/ Where it is desired to use retainer -1 or -2 with electron tube socket MIL-DTL-12883/2 or MIL-DTL-12883/3, it is necessary to replace the shield base on the above sockets with the applicable adapter.

2/ Not recommended for new design.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:42Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

The retainer (base), adapter, and other parts, as shown in figure 1, shall be designed to meet the requirements of MIL-DTL-24251, and to fit the shield and tube socket specified in table I.

Dimensions and configuration: See figure 1 and table I.

Retainer (base):

Material-Brass, sheet, .032 inch (0.81 mm) thick, ASTM-B36 and ASTM-B121, composition 2, annealed or aluminum alloy ASTM-B85, ASTM-B26, ASTM-B108; and SAE-J452, SAE-AMS4290 and SAE-AMS4291.

Finish-Black cadmium plate, SAE-AMS-QQ-P-416, class 1, type II, optional finish: Henderlube or equal, chromate MIL-DTL-5541.

Adapter:

Material-Brass, sheet, .015 inch (0.38 mm) thick on -3 and .025 inch (0.64 mm) thick on -4, ASTM-B36 and ASTM-B121, composition 2, annealed.

Finish-Black cadmium plate, SAE-AMS-QQ-P-416, class 3, type II, optional finish, Henderlube or equal.

The Part or Identifying Number (PIN) consists of the basic number of this specification sheet, preceded by the letter "M", and a dash number taken from table I.

Example:



Referenced Documents: In addition to MIL-DTL-24251, this document references the following :

MIL-DTL-5541
MIL-DTL-12883/2
MIL-DTL-12883/3
MIL-DTL-12883/10
MIL-DTL-12883/11
ASTM-B26/B26M
ASTM-B36/B36M
ASTM-B85
ASTM-B108
ASTMB121/B121M
SAE-AMS4290
SAE-AMS4291
SAE-AMS-QQ-P-416
SAE-J452

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:42Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5960-2008-008)

Review activities:
Army - MI
Navy - CG, MC
Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:42Z
Check the source to verify that this is the current version before use.