
MILITARY SPECIFICATION SHEET

SHIELD, ELECTRON TUBE, HEAT DISSIPATING, 7 AND 9 PIN, MINIATURE (OPEN SIDES)

The complete requirements for procuring the shield described herein shall consist of this document and the latest issue of Specification MIL-S-24251.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

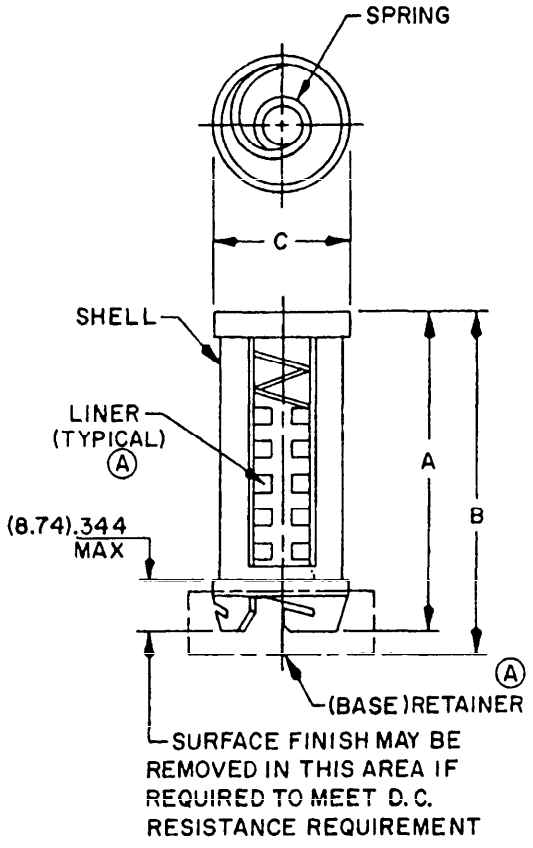

Ⓐ denotes changes

FSC 5960

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:43Z
Check the source to verify that this is the current version before use.

Characteristics.

Dash no.	Heat dissipation temp. reduction in °C (minimum)	A -.031 (.79)	B max	C max	Weight grams max	Tube envelope (ref) Style	Tube envelope (ref) Length nom.	Tube socket ref	Retainer (base) ref
1	45	1.344 (34.14)	1.530 (38.86)	.917 (23.29)	9	T-5 1/2	1.125 (28.58)	MIL-S-12883/10	M24251/4-1
2	95	1.844 (46.84)	2.030 (51.56)	.917 (23.29)	10.7	T-5 1/2	1.500 (38.10)		
3	70	2.344 (59.54)	2.530 (64.26)	.917 (23.29)	12.7	T-5 1/2	2.000 (50.80)		
4	50	1.344 (34.14)	1.530 (38.86)	1.036 (26.31)	10.2	T-6 1/2	1.125 (28.58)	MIL-S-12883/11	M24251/4-2
5	86	1.844 (46.84)	2.030 (51.56)	1.036 (26.31)	12	T-6 1/2	1.562 (39.67)		
6	84	2.344 (59.54)	2.530 (64.26)	1.036 (26.31)	14	T-6 1/2	2.000 (50.80)		

NOTES:

1. All dimensions are in inches.
2. Millimeters are in parentheses.
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. (A) Unless otherwise specified, tolerance is 2 places ±.010 (.25 mm); 3 places ±.005 (.13 mm)
5. MIL-S-24251/5 (shield) was formerly MS24232 (USAF) 8 Feb 1962.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:43Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

The shield, locking mechanism, liner, and other parts shall be designed to meet the requirements of MIL-S-24251, and to fit the tube envelope, tube socket and retainer (base) specified in table.

Dimensions and configuration: See figure and table.

(A) Material:

Spring-Beryllium copper, QQ-C-530.
Liner-Beryllium copper, QQ-C-533.
Shell-Aluminum alloy, WW-T-700/6 or QQ-A-250/2.

(A) Finish:

Spring-Black cadmium plate, QQ-P-416, class 1, type II, optional finish: Henderlube or equal.
Liner-Black cadmium plate, QQ-P-416 class 3, type II, optional finish: Henderlube or equal.
Shell-Black anodize, type II per MIL-A-8625, optional finish: Henderlube or equal.

Construction: The spring shall be held in place by friction or by mechanical means if the maximum diameter is smaller than the inside diameter of the shield. The tension shall be such as will insure maximum compression of .125 inch over seated tube. The force required to compress spring to .375 inch shall be within 1-1/2 to 2-1/2 pounds. Spirals shall not touch each other. The end of the coil spring shall not contact the electron tube envelope.

Installation force shall not exceed 20 pounds.

Engaging torque: 20 pound-inches maximum.

The part number consists of the basic number of this specification sheet, preceded by the letter "M", and a dash number taken from table.

Example:

M24251/5-1

Basic document number — Dash number from table

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - EL
Navy -
Air Force - 11, 17, 85
DSA - ES

User activities:
Army - MU
Navy - MC, CG
Air Force - 19

Preparing activity:
Navy - EC

(Project 5960-2313-6)

Source: https://assist.dla.mil -- Downloaded: 20261O-19T20:43Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:43Z
Check the source to verify that this is the current version before use.