
MIL-S-24251/6B
19 August 1974
SUPERSEDING
MIL-S-24251/6A
1 July 1968

MILITARY SPECIFICATION SHEET

SHIELD, ELECTRON TUBE, HEAT DISSIPATING, 7 AND 9 PIN, MINIATURE (RETROFIT TYPE ONLY)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the shield described herein shall consist of this document and the latest issue of Specification MIL-S-24251.

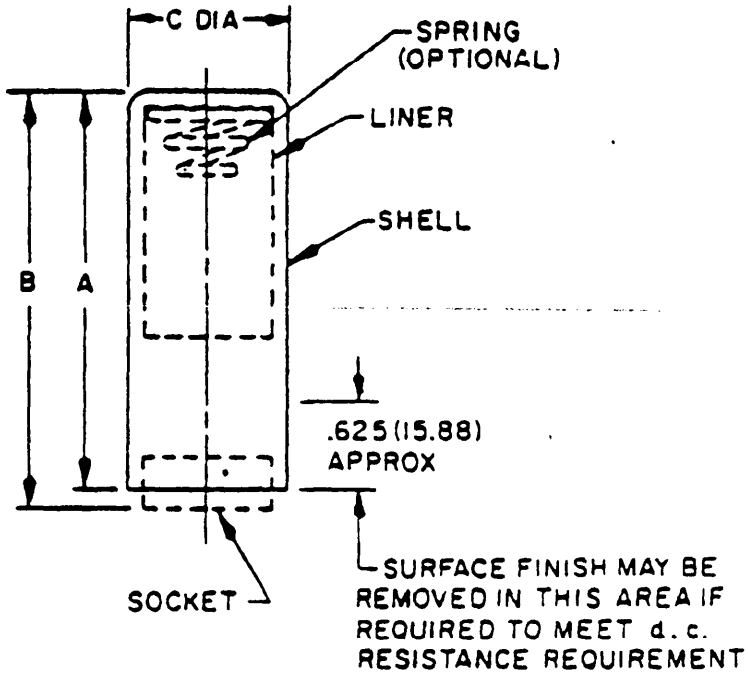

Ⓑ denotes changes

FSC 5960

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:43Z
Check the source to verify that this is the current version before use.

Characteristics.

Dash No.	Heat dissipation temp. reduction in °C (minimum)	A -.062 (1.57)	B max	C dia ±.015 (.38)	Weight grams max	Tube envelope		Tube socket ref
						Style	Length nom	
1	25	1.500 (38.10)	1.625 (41.28)	.875 (22.23)	11.0	T-5 1/2	1.125 (28.58)	MIL-S-12883/2
2	40	2.000 (50.80)	2.125 (53.98)	.875 (22.23)	15.0	T-5 1/2	(1.500 (38.10)	
3	45	2.500 (63.50)	2.625 (66.68)	.875 (22.23)	19.0	T-5 1/2	2.000 (50.80)	
4	25	1.500 (38.10)	1.625 (41.28)	1.000 (25.40)	12.0	T-6 1/2	1.125 (28.58)	MIL-S-12883/3 Ⓑ
5	55	2.000 (50.80)	2.125 (53.98)	1.000 (25.40)	16.0	T-6 1/2	1.562 (39.67)	
6	45	2.500 (63.50)	2.625 (66.68)	1.000 (25.40)	20.0	T-6 1/2	2.000 (50.80)	
7 1/	45	2.750 (69.85)	2.875 (73.03)	1.000 (25.40)	22.0	T-6 1/2	2.812 (71.42)	

1/ This shield is for use with noval tubes which are longer than usual tubes. For example, tube type 6094.

NOTES:
1. All dimensions are in inches.
2. Millimeters are in parentheses.
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. Unless otherwise specified, tolerance is 2 places ±.010 (.25 mm); 3 places ±.005 (.13 mm).
5. MIL-S-24251/6 (shield) was formerly MS24233 (USAF), 25 Apr 63.

REQUIREMENTS:

The shield, locking mechanism, liner, and other parts shall be designed to meet the requirements of MIL-S-24251, and to fit the tube envelope and tube socket specified in table.

Dimensions and configuration: See figure and table. No special retainer (base) or adapter will be permitted.

Material:
Spring (when used) - Beryllium copper, QQ-C-530.
Shell-Aluminum alloy, QQ-A-250/8 or QQ-A-250/2.
Liner-Beryllium copper, QQ-C-533.

Finish:
Spring (when used) - Black cadmium plate, QQ-P-416, class 1, type II.
Shell-Black anodize, type II of MIL-A-8625, black matte of MIL-C-5541, optional finish: Henderlube or equal.

Liner-Black cadmium plate, QQ-P-416, class 3, type II, optional finish: Henderlube or equal.

Construction: The spring when used shall be held in place by friction or by mechanical means if the maximum diameter is smaller than the inside diameter of the shield. The tension shall be such to insure maximum compression of .125 inch over seated tube. The force required to compress spring to .375 inch shall be with 1-1/2 to 2-1/2 pounds. Spirals shall not touch each other. The end of the coil spring shall not contact the electron tube envelope.


Source: https://assist.dla.mil -- Downloaded: 20260-19T20:43Z
Check the source to verify that this is the current version before use.

Installation force shall not exceed 20 pounds.

Engaging torque: 20 pound-inches maximum.

The part number consists of the basic number of this specification sheet, preceded by the letter "M", and a dash number taken from table.

Example:



Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - MU
Air Force - 11, 17, 80
DSA - ES

User activities:
Army - AV, MI
Navy - AS, OS, MC, CG, SH
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5960-2886)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:43Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D. C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT
DOD 316

OFFICIAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:43Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:43Z
Check the source to verify that this is the current version before use.