
MIL-S-24251/13A
1 July 1969
SUPERSEDING
MIL-S-24251/13
30 March 1967


MILITARY SPECIFICATION SHEET

# SHIELD, ELECTRON TUBE, HEAT DISSIPATING, OCTAL, T12 (WITH TUBE BASE DIAMETER 1.65 INCHES) (SPLIT SHELL)

The complete requirements for procuring the shield described herein shall consist of this document and the latest issue of Specification MIL-S-24251.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

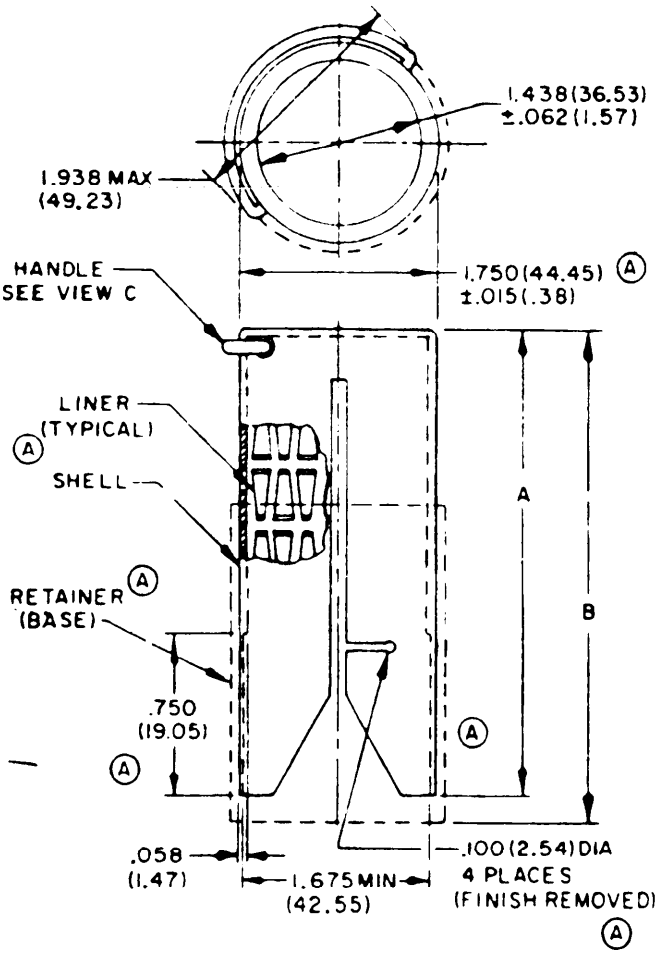

VIEW C

Ⓐ denotes changes



FSC 5960

Source: https://assist.dla.mil -- Downloaded: 20260-19T20:45Z
Check the source to verify that this is the current version before use.

Characteristics.

| Dash no. | Heat dissipation temp. reduction in °C (minimum) | A ±.062 (1.57) | B max | Weight grams max | Tube envelope style T12 length | Use with retainer |
|---|---|---|---|---|---|---|
| 1 | 20 | 2.250(57.15) | 2.625(66.68) | 33 | 2.500(63.50) | |
| 2 | 20 | 2.500(63.50) | 2.875(73.03) | 35 | 2.750(69.85) | |
| 3 | 20 | 2.750(69.85) | 3.125(79.38) | 37 | 3.000(76.20) | |
| 4 | 20 | 3.000(76.20) | 3.375(85.73) | 44 | 3.250(82.55) | M24251/14-2 |
| 5 | 20 | 3.250(82.55) | 3.625(92.08) | 48 | 3.500(88.90) | |
| 6 | 20 | 3.500(88.90) | 3.875(98.43) | 52 | 3.750(95.25) | |
| 7 | 20 | 4.000(101.60) | 4.375(111.13) | 61 | 4.250(107.95) | |
| 8 | 20 | 4.500(114.30) | 4.875(123.83) | 70 | 4.750(120.65) | |

NOTES:
1. All dimensions are in inches.
2. Millimeters are in parentheses.
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
(A) 4. Unless otherwise specified, tolerance is 2 places ±.010 (.25 mm); 3 places ±.005 (.13 mm).
5. MIL-S-24251/13 (shield) was formerly MS24276 (USAF), 8 June 1961.

REQUIREMENTS:
The shield, locking mechanism, liner, and other parts shall be designed to meet the requirements of MIL-S-24251, and to fit the tube envelope and retainer (base) specified in table.

Dimensions and configuration: See figure and table.

Material:
Handle-Beryllium copper wire, QQ-C-530.
Liner-Beryllium copper, QQ-C-533.
Shell-Aluminum, WW-T-700/6, temper T6.

Heat treatment:
Liner-Heat treat full hard.

Finish:
Handle-
Henderlube 502A8 or equal.
Liner-
Henderlube 502A8 or equal.
Shell-Anodize, MIL-A-8625 and
Henderlube 502A8 or equal.


Installation force shall not exceed 20 pounds.

Engaging torque: 20 pound-inches maximum.

This shield fits tube types with bases maximum diameter 1.650 such as B8-16, B8-98, B6-100 and B5-101 (MIL-E-1).

The part number consist of the basic number of this specification sheet, preceded by the letter "M", and a dash number taken from table.

Example:






Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:45Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - EL
Navy -
Air Force - 11, 17, 85
DSA - ES

User activities:
Army - MU
Navy - MC, CG
Air Force - 19

Preparing activity:
Navy - EC

(Project 5960-2313-14)



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:45Z
Check the source to verify that this is the current version before use.