MIL-R-7885/2C
18 April 1988
SUPERSEDING
MIL-R-007885/2B(AS)
31 October 1983

MILITARY SPECIFICATION SHEET

# RIVETS, BLIND, STRUCTURAL, UNIVERSAL PROTRUDING HEAD, 5056 AL ALLOY SLEEVE, MECHANICALLY LOCKED ALLOY STEEL SPINDLE (TYPE I, STYLE A, CLASS 1)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the blind rivets described herein shall consist of this document and the latest issue of MIL-R-7885.

DESIGN AND USAGE LIMITATION. Rivets shall be used in compliance with the limitations of MS33522.

INSTALLATION. Rivets shall be capable of being installed by a tool conforming to MIL-R-85188. Lubricant shall not be removed prior to installation.

REQUIREMENTS:

MATERIAL:

Sleeve: 5056 Al Alloy per QQ-A-430 (UNS A95056).
Spindle: 8740 steel per AMS6322 (UNS G87400).
Locking Feature: A-286 CRES per AMS 5731 (UNS S66286) or 5056 Al Alloy per QQ-A-430 (UNS A95056).
Lubricant: See general specification (MIL-R-7885).
Grip Adjusting Feature (Optional): 10XX series carbon steel or 8740 steel per AMS 6322 (UNS G87400).

PROTECTIVE TREATMENT:

5056 Al Alloy: Chemically treated per MIL-C-5541, color clear.
8740 Alloy Steel: Cadmium plated per QQ-P-416, Type II, Class 2.
10XX Series Carbon Steel: Cadmium plated per QQ-P-416, Type I or II, Class 2.

A-286 CRES: Parts manufactured after August 1988 shall be passivated per QQ-P-35.

SURFACE TEXTURE: Surface texture shall be measured per ANSI B46.1 and shall not exceed 125 microinches.


TOLERANCES: Unless otherwise specified, decimals $\pm$.010, angles $\pm$2°.

Unless otherwise specified, dimensions are in inches.
Break all sharp edges and remove all burrs and slivers.

AMSC N/A FSC 5320
DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:26Z
Check the source to verify that this is the current version before use.

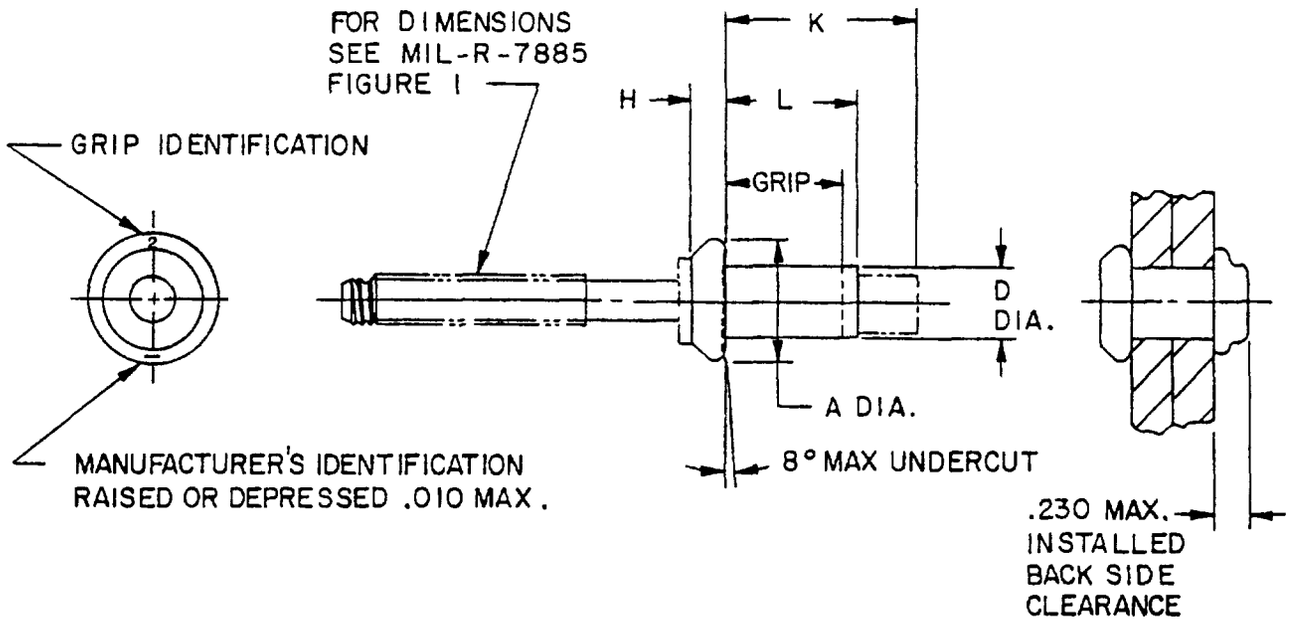


Optional Driving Anvil Gold Colored to Identify Style "A" Rivets

TABLE I

| Nominal Size | Basic Body Dia | A Dia | | D Dia | | H | | Installation Hole Limits | |
|---|---|---|---|---|---|---|---|---|---|
| | | Max | Min | Max | Min | Max | Min | Max | Min |
| 4 | .125 | .260 | .240 | .129 | .125 | .064 | .054 | .132 | .129 |
| 5 | .156 | .322 | .302 | .160 | .156 | .077 | .067 | .164 | .160 |
| 6 | .187 | .385 | .365 | .192 | .188 | .090 | .080 | .196 | .192 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:26Z
Check the source to verify that this is the current version before use.

TABLE II

| Grip Limits | | Nominal Sizes | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| | | 4 | | | 5 | | | 6 | | |
| Min | Max | Dash No. | L +.000 -.030 | K Max | Dash No. | L +.000 -.030 | K Max | Dash No. | L +.000 -.030 | K Max |
| (a) | .062 | -01 | .161 | .380 | -01 | .187 | .410 | -01 | .219 | .470 |
| .063 | .125 | -02 | .224 | .450 | -02 | .230 | .470 | -02 | .262 | .510 |
| .126 | .187 | -03 | .287 | .510 | -03 | .293 | .530 | -03 | .325 | .570 |
| .188 | .250 | -04 | .349 | .570 | -04 | .355 | .590 | -04 | .387 | .640 |
| .251 | .312 | -05 | .412 | .630 | -05 | .418 | .650 | -05 | .450 | .700 |
| .313 | .375 | -06 | .474 | .700 | -06 | .480 | .720 | -06 | .512 | .760 |
| .376 | .437 | -07 | .537 | .760 | -07 | .543 | .770 | -07 | .575 | .820 |
| .438 | .500 | -08 | .599 | .820 | -08 | .605 | .840 | -08 | .637 | .880 |
| .501 | .562 | -09 | .662 | .880 | -09 | .668 | .900 | -09 | .700 | .950 |
| .563 | .625 | | | | -10 | .730 | .960 | -10 | .762 | 1.010 |
| .626 | .687 | | | | -11 | .793 | 1.02 | -11 | .825 | 1.070 |
| .688 | .750 | | | | | | | -12 | .887 | 1.130 |

(a) Do not use part number M7885/2-4-01 below 0.025 sheet thickness.
Do not use part number M7885/2-5-01 below 0.031 sheet thickness.
Do not use part number M7885/2-6-01 below 0.037 sheet thickness.

EXAMPLE OF PART NUMBER:

M7885/2 - 4 - 02

- 02 — Grip length dash no. in .062-inch increments (see Table II).
- 4 — Nominal sizes in .0312-inch increments (see Table I).
- M7885/2 — Specification Sheet No.

Custodians:
Army - AR
Navy - AS
Air Force - 99

Review Activities:
Army - AV
Air Force - 82
DLA - IS

User Activities:
Navy - MC

Preparing Activity:
Navy - AS
(Project No. 5320-0434)



Source: https://assist.dla.mil -- Downloaded: 202640-17T09:26Z
Check the source to verify that this is the current version before use.