NOT MEASUREMENT SENSITIVE

MIL-L-7870B
24 July 1992

SUPERSEDING
MIL-L-7870A
10 August 1953

MILITARY SPECIFICATION

LUBRICATING OIL: GENERAL PURPOSE, LOW TEMPERATURE

This specification is approved for use by all Departments and Agencies of the Department of Defense

1. SCOPE

1.1 Scope. This specification covers one grade of general purpose, low temperature lubricating oil. This lubricating oil is identified by NATO Code O-142 (see section 6).

2. APPLICABLE DOCUMENTS

2.1 Government documents

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index Specification and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: ASD/ENES, Wright-Patterson AFB OH 45433-6503 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 9150

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:22Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

P–D–680	–	Dry Cleaning and Degreasing Solvent
QQ–S–698	–	Steel Sheet and Strip, Low Carbon
PPP–C–96	–	Cans, Metal, 28 Gage and Lighter
PPP–D–729	–	Drums, Shipping and Storage, Steel, 55–Gallon (208 Liters)

STANDARDS

FEDERAL

FED–STD–313	–	Material Safety Data, Transportation Data and Disposal Data for Hazardous Materials Furnished to Government Activities
FED–STD–791	–	Lubricants, Liquid Fuels, and Related Products; Methods of Testing

MILITARY

MIL–STD–290	–	Packaging of Petroleum and Related Products

(Copies of specifications, standards, handbooks, drawings, publications, and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

2.2 Non–Government publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents, which are DOD adopted, shall be those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of the documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A304	–	Standard Specification for Steel Bars, Alloy, Subject to End–Quench Hardenability Requirements (DOD Adopted)
ASTM A322	–	Standard Specification for Steel Bars, Alloy, Standard Grades (DOD Adopted)
ASTM A331	–	Standard Specification for Steel Bars, Alloy, Cold–Finished (DOD Adopted)
ASTM B36	–	Standard Specification for Brass Plate, Sheet, Strip, and Rolled Bar (DOD Adopted)
ASTM D91	–	Standard Test Method for Precipitation Number of Lubricating Oils (DOD Adopted)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:22Z
Check the source to verify that this is the current version before use.

ASTM D92	–	Standard Test Method for Flash and Fire Points by Cleveland Open Cup (DOD adopted)
ASTM D97	–	Standard Test Method for Pour Point of Petroleum Oils (DOD Adopted)
ASTM D445	–	Standard Test Method for Kinematic Viscosity of Transparent and Opaque Liquids (and the Calculation of Dynamic Viscosity) (DOD Adopted)
ASTM D972	–	Standard Test Method for Evaporation Loss of Lubricating Greases and Oils (DOD Adopted)
ASTM D974	–	Standard Test Method for Neutralization Number by Color–Indicator Titration (DOD Adopted)
ASTM D1500	–	Standard Test Method for ASTM Color of Petroleum Products (ASTM Color Scale) (DOD Adopted)
ASTM D1748	–	Standard Test Method for Rust Protection by Metal Preservatives in the Humidity Cabinet (DOD Adopted)
ASTM D4057	–	Standard Practice for Manual Sampling of Petroleum and Petroleum Products (DOD Adopted)

(Application for copies should be addressed to ASTM, 1916 Race Street, Philadelphia PA 19103.)

(Nongovernment standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets, or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Qualification. The instrument oil furnished under this specification shall be a product that is qualified for listing on the applicable Qualified Products List (QPL) at the time set for opening of bids (see 4.3.1 and 6.3). Changes shall not be permitted in the formulation of an approved product unless specific written approval of the qualifying activity is obtained.

3.2 Materials. The oil shall be a fraction of petroleum refined to meet the requirements of this specification, and containing additive materials to impart corrosion–protective and oxidation–resistant properties.

3.3 Properties. The properties of the finished oil shall be as specified in table I when tested as specified in section 4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:22Z
Check the source to verify that this is the current version before use.

TABLE I. Properties of the finished oil.

Characteristics	Value	
	Maximum	Minimum
Viscosity in centistokes		
at 38° C		10
at –40° C	4000	
Pour point	–57° C	
Flash point		130° C
Precipitation number	0	
Acid number	report	

3.4 Performance

3.4.1 Corrosion and oxidation stability. When tested as specified in section 4, the change in weight of cadmium–plated steel, copper, steel, aluminum alloy, and magnesium alloy when subjected to the action of the oil for 168 hours at 121° C ± 1° C shall not be greater than 0.2 mg per cm of surface for each strip. There shall be no pitting, etching, or visible corrosion on the surface of any of the metals when viewed under magnification of 20 diameters. Slight discoloration of the surface of the copper will be permitted, but dark brown, gray, or black stain shall be cause for rejection.

3.4.2 Resistance to oxidation. When tested as specified in section 4, the oil shall not have changed more than –5 to 20 percent from the original viscosity in centistokes at 38° C after the oxidation–corrosion test (see 4.5.2). The neutralization number increase shall not be greater than 0.2 after oxidation. There shall be no evidence of separation of insoluble materials or gumming of the oil.

3.4.3 Low temperature stability. When tested as specified in section 4, there shall be no gelling or separation of solid or liquid phases in the oil after storage at a temperature at or below –54° C for 72 hours. The presence of a dense cloud, which does not "settle out," shall not be the cause for rejection.

3.4.4 Evaporation. When tested as specified in section 4, there shall be not more than 22 percent by weight evaporation loss after the oil has been subjected to the test conditions, at 99° C.

3.4.5 Corrosivity. When subjected to the test specified in section 4, the test areas of the three discs shall show no evidence of corrosion, pitting, or other attack. The third disc may show no more than three spots within the area covered by the clip.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:22Z
Check the source to verify that this is the current version before use.

3.4.6 Toxicity. The instrument oil shall have no adverse effect on the health of personnel when used for its intended purpose. The fluid shall contain no elements that produce noxious vapors in such concentrations that irritate personnel during formulation or use under conditions of adequate ventilation while exercising caution to avoid prolonged contact with the skin and while observing Occupational Safety and Health Administration (OSHA) guidelines. Questions pertaining to the toxic effects shall be referred to the appropriate departmental medical service who will act as an advisor to the procuring activity. Material safety data sheets shall be prepared and submitted in accordance with FED–STD–313.

3.5 Color and appearance. When tested as specified in section 4, the oil shall be clear, transparent, and uniform in appearance, and not darker than No. 5 Union Colorimeter of ASTM D1500.

3.6 Protection of panels. When tested as specified in section 4, not more than one panel out of five panels shall fail after being covered with a film of lubricating oil for 100 hours. If more than one panel fails, the product shall be retested by repeating the same test with an additional ten panels. Not more than four panels shall fail out of the total 15 panels, (five on an original test plus ten on retest).

3.7 Workmanship. The oil shall be entirely homogeneous and free from lumps of undissolved additive, water, dirt, lint, or sediment. Prior to final packaging the oil shall be filtered through a 0.45 micrometer pore–size filter.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.3).

b. Quality conformance inspection (see 4.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:22Z
Check the source to verify that this is the current version before use.

4.3 Qualification inspection. Qualification inspection shall consist of a review for approval of the submitted manufacturers test report and subjecting the qualification samples (see 4.3.1) to examination and testing for all the requirements of this specification.

4.3.1 Qualification samples. The qualification sample(s) shall consist of 1 gallon finished oil, 1 pint base stock (before the additive agents) and 1 ounce of compounds used for improving the oxidation stability and corrosion protection. In the event that the additives are supplied as concentrated solutions, an equivalent quantity of the solution shall be furnished.

4.3.2 Qualification tests. Qualification sample(s) shall be subjected to all tests specified under 4.5, method of inspection.

4.3.3 Data to accompany qualification samples. The samples shall be accompanied by a material safety data sheet and a test report from the manufacturer or a commercial laboratory containing complete information about the source, type of base stock, and additive materials used; the formulation and composition of the finished fluid; and laboratory data showing quantitative results of all the tests required by this specification, except storage stability. Separate qualification inspection shall be required for each base stock used. The samples shall be plainly identified by securely attached durable tags or labels marked with the following information:

Sample for qualification inspection
MIL-L-7870B — Lubricating Oil: General Purpose, Low Temperature
Name of ingredient (for ingredient material)
Name of manufacturer
Product code number
Date of manufacture

4.3.3.1 Toxicity coordination. At the time of qualification submittal, the contractor shall provide the following certified materials for each ingredient to the Air Force Occupational and Environmental Health Directorate, AL/OEMB, Brooks AFB TX 78235:

Chemical Name and Formula (nomenclature of the International Union of Pure and Applied Chemistry)

NIOSH Identification Number (accession or identification number referenced in the Registry of Toxic Effects of Chemical Substance, if assigned)

In addition, the range of percentages of harmful or toxic components in the finished product and any toxicological data useful in evaluating safety of the formulation shall be furnished. The Government reserves the right to determine whether such data is adequate for the purposes of qualification under the provisions of this specification. The AL/OEMB personnel having 15 working days from the receipt of the contractor materials to report compliance/noncompliance to the qualifying agency.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:22Z
Check the source to verify that this is the current version before use.

4.3.3.2 Formulation sheet example. An example of a satisfactory form for the formulation sheet indicating the weight percentage and nature of each ingredient:

Oil base stock	percentage
Oxidation inhibitor (manufacturer's name and number)	percentage
Corrosion inhibitor (manufacturer's name and number)	percentage

4.3.4 Retention of qualification. In order to retain qualification of a product approved for listing on the QPL, the manufacturer shall verify by certification to the qualifying activity that the manufacturer's product complies with the requirements of this specification. The time of periodic verification by certification shall be in two-year intervals from the date of original qualification. The Government reserves the right to re-examine the qualified product whenever deemed necessary to determine that the product continues to meet any or all of the specification requirements.

4.4 Quality conformance inspection. The quality conformance inspection shall consist of sampling plans A and B. Samples shall be labeled completely with information identifying the purposes of the sample, name of product, specification number, lot and batch number, date of sampling, and contract number. Quality conformance tests shall be as specified in table II.

TABLE II. Quality conformance tests.

Inspection	Paragraph Requirement	Test
Corrosion and oxidation stability	3.4.1, 3.4.2	4.5.2
Low temperature stability	3.4.3	4.5.6
Viscosity	3.3	4.5.2
Pour point	3.3	4.5.2
Flash point	3.3	4.5.2
Precipitation number	3.3	4.5.2
Evaporation	3.4.4	4.5.2
Examination of filled containers	5.1	4.5.3

4.4.1 Inspection lots

4.4.1.1 Bulk lot. A bulk lot (batch) is an indefinite quantity of a homogeneous material mixture offered for acceptance in a single, isolated container or manufactured in a single-plant run (not exceeding 24 hours) through the same processing equipment, with no change in ingredient material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:22Z
Check the source to verify that this is the current version before use.

4.4.1.2 Packaged lot. A packaged lot is an indefinite number of unit containers of identical size and type, offered for acceptance and filled with a homogeneous material mixture from one isolated container or filled with a material mixture manufactured in a single–plant run (not exceeding 24 hours) through the same processing equipment, with no change in ingredient material.

4.4.2 Sampling plan A. A one–gallon sample from a bulk lot (see 4.4.1.1) shall be selected in accordance with ASTM D4057, and subjected to all applicable quality conformance tests as specified in 4.5.2. If the samples fail any of the quality conformance tests, the inspection lot shall be rejected.

4.4.3 Sampling plan B. A random sample of filled unit containers and a sample of shipping containers fully prepared for delivery shall be selected from each packaged lot of oil (see 4.4.1.2) in accordance with table III. This sample(s) shall be subjected to inspection specified in 4.5. If any sample fails, the lot shall be rejected.

TABLE III. Sampling plan.

Lot size	Sample size
1–4	all
5–50	5
51–90	7
91–150	11
151–280	13
281–500	16
501–12000	19
[acceptance number is zero, (c + 0)]	

4.5 Method of inspection

4.5.1 Inspection. Inspection shall be in accordance with Method 9601 of FED–STD–791 and 4.5.3 of this specification.

4.5.2 Test methods. The oil properties shall be determined in accordance with the applicable methods specified in table IV and 4.5.5 through 4.5.7. Physical and chemical values specified in section 3 apply to the arithmetic average of the determinations made on the samples for those values that fall within any stated repeatability or reproducibility limits of the applicable test method.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:22Z
Check the source to verify that this is the current version before use.

TABLE IV. Test methods for oil properties.

Characteristics	Test methods	
	FED–STD–791	ASTM
Corrosion and oxidation stability	5308	
Pour point		D97
Flash point (open cup method)		D92
Precipitation number		D91
Viscosity		D445
Color		D1500
Evaporation loss of lubricating greases and oils		D972
Acid number		D974

4.5.3 Examination of filled container. Each sample of the filled unit container and the shipping container shall be examined for evidence of leakage and net content, and examined for construction defects in the container and closure. Any container in the sample that is under the required fill, or has one or more defects shall be rejected. Rejected lots may be resubmitted for acceptance inspection provided that the contractor has removed or repaired all nonconforming containers.

4.5.4 Toxicological product formulations. The contractor shall furnish to the contracting activity the toxicological data and formulations required to evaluate the safety of the material for the proposed use through the submission of the material safety data sheet detailed in FED–STD–313.

4.5.5 Protection test

4.5.5.1 Preparation of panels. The following procedures shall be conducted:

a. Cut five panels from steel that conforms to QQ–S–698.

b. Size the panels and locate the holes as shown in figure A7 of ASTM D1748. Remove all burrs, sharp edges, and corners, including the edges of the holes.

c. Highly polish the panel with No. 3/0 emery paper prior to use. Next wash and clean the panel in a solvent conforming to P–D–680, type II. Then drain thoroughly and agitate in boiling 95 percent methanol.

d. After cleansing, cool the panels in a desiccator. Care must be taken during cleaning and preparation to ensure that the surfaces are not contaminated by fingerprints. Handle the panels only with tongs during the cleaning operation and only with hooks during and after dipping.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:22Z
Check the source to verify that this is the current version before use.

4.5.5.2 Procedure. These steps shall be conducted:

a. Dip five panels in a suitable sample of lubricating oil, which is maintained at 25° C ± 2° C, remove and allow to drain for 2 hours at that temperature from glass, monel, or stainless steel supports.

b. At the end of this period, suspend the panels in a humidity cabinet conforming to ASTM D1748 for a period of 100 hours, and in such a manner that the drippage from the supports will not fall onto the panels. Maintain the humidity within the cabinet at 100 percent relative humidity and at a dry bulb temperature of 49° C ± 2° C for a 100–hour exposure period.

c. Remove the panels from the cabinet, clean them with naptha, and examine. Panels have failed the protection test if at the end of the test period one of the following conditions exists in the significant areas of the panels as defined by ASTM D1748, figure A8 considering both sides of the panel:

(1) A corroded area of 2–mm diameter or larger

(2) Two or more spots of between 1mm and 2 mm maximum diameter. If more than one panel in five panels fail the protection test as defined above, a retest will be permitted. Retests shall consist of repeating the protection test using ten additional panels. Reject the lubricating oil if more than four panels fail the test (adding failures of both test and retest).

4.5.6 Stability at low temperature. A 100–ml sample of the oil shall be maintained at or below –54° C for 72 hours in a stoppered flask. At the end of that time there shall be no visual evidence of gelling, separation, or crystallation of the oil. Presence of a dense cloud, which does not "settle out," shall not be cause for rejection.

4.5.7 Corrosivity test

4.5.7.1 Preparation of panels (also see 4.5.5.1)

4.5.7.2 Preparation of steel disc. The following steps shall be performed:

a. Cut three discs 0.5 inch thick from a 1–inch diameter bar stock that conforms to ASTM A304, ASTM A322, and ASTM A331, composition FS E52100.

b. Heat–treat the discs to a hardness of Rockwell C–62. (Rollers that may be obtained from roller–bearings with similar chemical, physical, and dimensional properties to the above bar stock after heat treatment, can be substituted for the formation of the discs. In this case, no additional heat treatment is necessary.)

c. Now, slowly surface grind on one side to a finish of less than 20 micro–inches rms. If coolant is used during grinding, slush the discs in absolute methanol. Next, abrade the discs on the surface–ground side with successive applications of emery polishing paper grades 1/0, 2/0, 3/0, and finally 4/0. Papers incorporated iron oxide as the polishing medium and wet–dry type papers shall not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:22Z
Check the source to verify that this is the current version before use.

d. Wipe the discs clean with sterile absorbent gauze and examine under a 10X magnification for any signs of corrosion or other defects. Do not use defective specimens. Store the discs in a desiccator containing silica gel until ready for use.

4.5.7.3 Preparation of brass clips. The following steps shall be performed:

a. Fabricate clips from commercial 0.0225-inch brass sheet conforming to ASTM B36 , copper alloy UNS No. C26000, spring temper. The size and shape of the clips are illustrated in figure 1.

b. Immerse the clips for 20 seconds in the following etching solution:

450 ml water
300 ml conc sulfuric acid
225 ml conc nitric acid
8 ml conc hydrochloric acid

After etching, wash the clips in cold running tap water and then in distilled water. Dry with acetone and store the clips in a desiccator containing silica gel as desiccant until ready for use.

4.5.7.4 Procedure. The following procedures shall be performed:

a. Coat the three discs with test oil by dipping and stirring the rod in the test oil and allowing the oil from the rod to drop onto the polished side of the discs.

b. Clamp the brass clips over the coated discs and the assemblies and place them in a test chamber, which is maintained at 27° C ±1° C and 50 percent relative humidity, for a period of 10 days. For a 50 percent relative humidity, use a sulfuric acid solution with density of 1.338 at 20° C.

c. After exposure, remove the assemblies and outline the brass clips on the discs using the clips as templates. Then remove the clips and wipe the test oil from the discs.

d. Examine the discs under 10X magnification for signs of corrosion, pitting, or other detrimental effects. If the test results are questionable, repeat the entire test using new specimens, except extend the time period to 20 days. In this case, examine the discs as in the previous manner.

5. PACKAGING

5.1 Packaging and packing. The packaging and packing of the instrument oil shall be in accordance with MIL-STD-290. The lubricant shall be furnished in cans or drums as specified in table V. Just prior to filling, thoroughly clean, rinse with clean-filtered lubricant and examine to ensure absolute absence of loose-solder, dirt, fibers, lint, metal particles, seaming compound, corrosion products, water or other foreign contaminants.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:22Z
Check the source to verify that this is the current version before use.

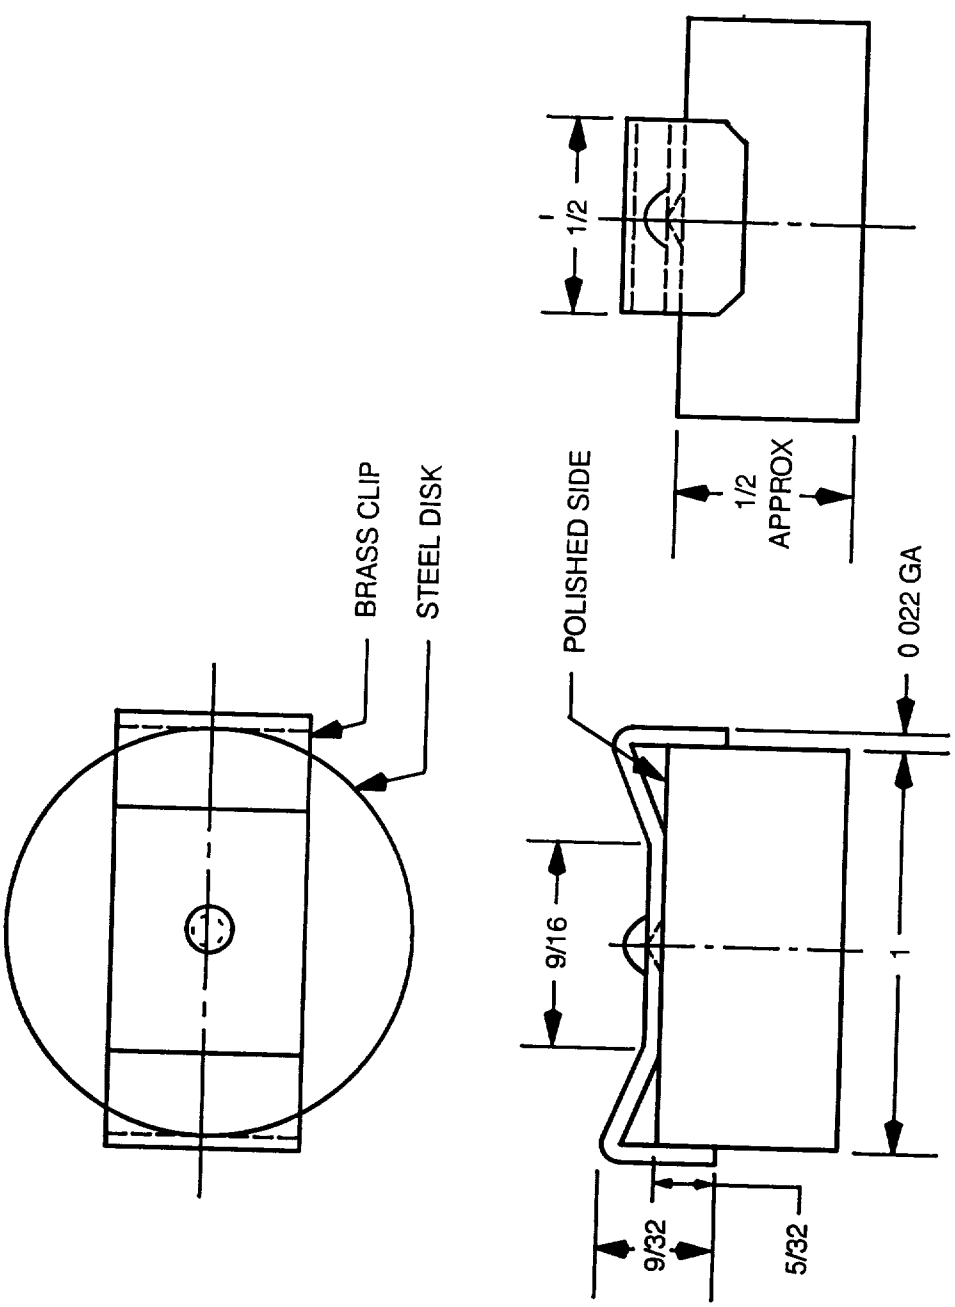


FIGURE 1. Typical test specimens for corrosivity test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:22Z
Check the source to verify that this is the current version before use.

TABLE V. Lubricant packaging.

Container size	Package in accordance with
4 ounce	PPP–C–96, Type V, Class 6
1 quart	PPP–C–96, Type V, Class 4
1 gallon	PPP–C–96, Type V, Class 4
55 gallon	PPP–D–729, Type II, 18/18 gage

5.2 Marking. The marking of all containers shall be in accordance with MIL–STD–290 and any special marking request in the contract.

6. NOTES

6.1 Intended use. The oil covered by this specification is intended for use wherever a general purpose, low temperature, lubricating oil is required.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of the specification.

b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).

c. Type and size of containers (see 5.1).

d. Quantity.

e. Selection of applicable levels of packaging and packing with requirements in detail (see 5 1).

f. Special marking (see 5.2).

g. Toxicological data requirements (see 4.5.4).

6.2.1 Purchase unit. This instrument oil covered by this specification should be purchased by volume.

6.3 Qualification. With respect to products requiring qualification, awards will be made only for such products as have, prior to the time set for opening of bids, been tested and approved for inclusion in the applicable QPL whether or not such products have been so listed by that date. The attention of the suppliers is called to this requirement, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government, tested for qualification, in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. The activity responsible for the QPL is WL/MLSE, Wright–Patterson AFB OH 45433–6533. Information pertaining to qualification of products may be obtained from that activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:22Z
Check the source to verify that this is the current version before use.

6.3.1 Qualification information. It is understood that the material furnished under this specification subsequent to final approval shall be of the same composition and shall be equal to products on which approval was originally granted. In the event that oil furnished under contract is found to deviate from the composition of the approval product, or that the product fails to perform satisfactorily, approval of such products will be subjected to immediate withdrawal from the QPL at the discretion of the approving activity.

6.4 International agreements. The provisions of 1.1 of this specification are the subject of international standardization agreement (ASCC 15/1 and STANAG–1135). When amendment, revision or cancellation of this specification is proposed, the departmental custodians will inform their respective Departmental Standardization Office (DEPSO) so that appropriate action may be taken respecting the international agreement concerned.

6.5 Subject term (keyword) listing

Corrosion–protective
Flash point
Low temperature oil
Lubricating oil
Oil
Oxidation resistant
Petroleum
Pour point
Toxicity

6.6 Change from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:
Army – ME
Navy – AS
Air Force – 11

Preparing activity:
Air Force – 11

(Project No. 9150–1098)

Review activities:
Army – MI, SM, AR
Navy – SA
Air Force – 68
DLA – GS

User activity:
Navy – OS, SH

International interest:
NATO
ASCC

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:22Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1 The preparing activity must complete blocks 1, 2, 3, and 8 In block 1, both the document number and revision letter should be given

2 The submitter of this form must complete blocks 4, 5, 6, and 7

3 The preparing activity must provide a reply within 30 days from receipt of the form

NOTE This form may not be used to request copies of documents, not to request waivers, or clarification of requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractural requirements

I RECOMMEND A CHANGE:	1 DOCUMENT NUMBER MIL-L-7870B	2 DOCUMENT DATE (YYMMDD) 920724

3 DOCUMENT TITLE

LUBRICATING OIL: GENERAL PURPOSE, LOW TEMPERATURE

4 NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible Attach extra sheets as needed)*

5 REASON FOR RECOMMENDATION

6 SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE *(Include Area Code)* (1) Commercial (2) AUTOVON *(If applicable)*	7 DATE SUBMITTED *(YYMMDD)*

8 PREPARING ACTIVITY

A NAME AF CODE 11	B. TELEPHONE *(Include Area Code)* (1) Commercial: (513) 255–6281 (2) AUTOVON *(If applicable)*: DSN 785–6281
C ADDRESS *(Include Zip Code)* ASC/ENES WRIGHT–PATTERSON AFB OH 45433–6503	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:22Z
Check the source to verify that this is the current version before use.