FED. SUP CLASS
3110

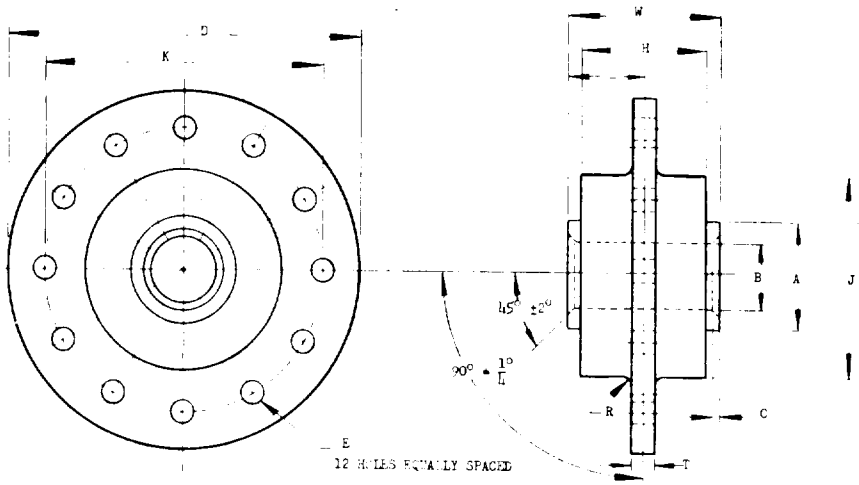

DASH NO.	BORE SIZE NOM	A MIN DIA	B +.0000 -.0005	C +.010 -.005	D ±.010	E +.000 -.005	H ±.005	J ±.010	K ±.005	R +.010 -.000	T ±.005	W +.000 -.005
-1	1/4	.382	.2500	.015	1.625	.245	.500	.750	1.312	.062	.062	.625
-2	5/16	.441	.3125		1.687		.562	.875	1.375			.687

DASH NO.	RADIAL PLAY IN. MAX	AXIAL PLAY IN. MAX	WOBBLE IN. MAX	RADIAL STATIC CAPACITY LBS MIN	AXIAL STATIC CAPACITY LBS MIN	RADIAL ENDURANCE LOAD LBS MIN	LIMIT MOMENT RATING INCH- LBS MIN	WEIGHT LBS MAX
-1	.0010	.0020	.0050	2770	700	500	414	.06
-2				3280	900	630	551	.08

MATERIAL: RINGS, MIL-S-7420.
BALLS, MIL-B-1083
PLATING: CADMIUM PLATE, QQ-P-416, TYPE I, CLASS 2, THICKNESS .0005 MAX.
HARDNESS: RINGS, R_C -58 - 62.
RIVETING FLANGES, R_C -25 MAX.
BALLS, MIL-B-1083.

SURFACE ROUGHNESS: 32 ALL OVER, RACEWAYS 4, IN ACCORDANCE WITH ANSI B46.1-62.

REMOVE ALL BURRS AND SHARP EDGES.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED DIMENSIONS TO BE MET AFTER PLATING.
LUBRICATION: MIL-G-23827 (8)

INTERCHANGEABILITY RELATIONSHIP - MS20218 -1 AND -2 PARTS CAN UNIVERSALLY REPLACE THE INACTIVATED AN218P4 AND P5 PARTS, RESPECTIVELY; BUT THE INACTIVATED AN218P4 AND P5 PARTS CANNOT ALWAYS REPLACE THE SUPERSEDING MS20218-1 AND -2 PARTS.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 27 Mar 67 REVISED (A) 10 Apr 68 (B) 20 Apr 70

Review activities:

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. USAF - 11 (8) Other Cust Army - AT Navy - AS	TITLE BEARING, BALL, ANTI-FRICTION, AIRFRAME	MILITARY STANDARD MS20218
PROCUREMENT SPECIFICATION MIL-B-6038	SUPERSEDES: AN218 SEE NOTES	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:22Z
Check the source to verify that this is the current version before use.