FED. SUP CLASS
1660

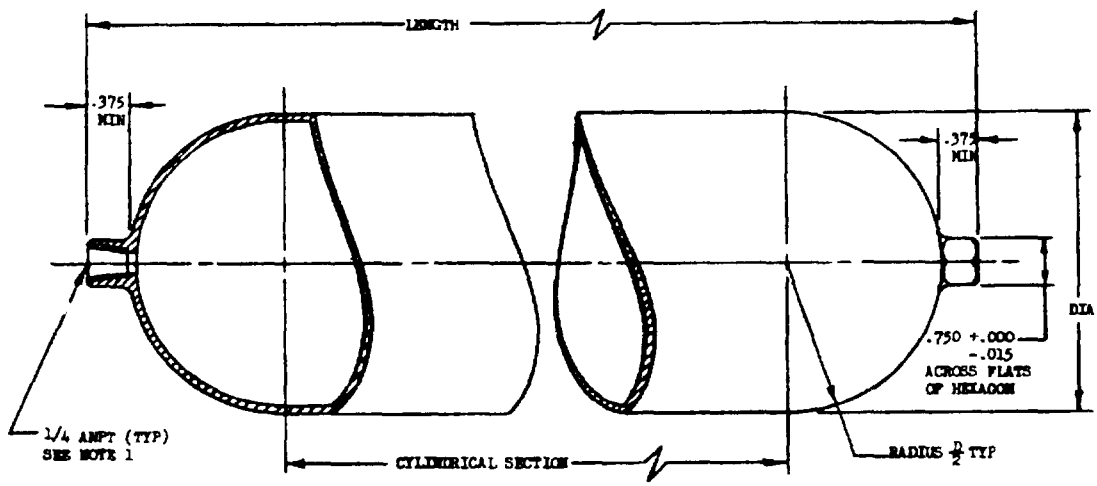

(DOUBLE OUTLET DESIGN SHOWN)

DASH NO.	SUPERSEDED TYPES	INTERNAL VOLUME CU INCH MIN	WEIGHT LBS MAX	LENGTH INCHES MAX	DIA INCHES MAX	NUMBER OF OPENINGS
-1	A-6 MIL-C-5435	280	3.75	14.500	5.750	1
-2	B-3 MIL-C-5436	280	3.75	15.000	5.750	2
-3	D-2 MIL-C-5887	500	5.75 (A)	23.500	5.750	2
-4	F-1 MIL-C-5888	1000	10.00	18.000	10.125	2
-5	F-2 MIL-C-5889	1000	11.00	44.500	5.750	2
-6	G-1 MIL-C-5890	2100	18.00	24.500	12.562	2
-7	J-1 MIL-C-5891	18000	155.00	49.250	24.500	2

NOTES:

1. THREADS SHALL BE IN ACCORDANCE WITH MIL-P-7105.

2. INTERNATIONAL INTEREST:
CERTAIN PROVISIONS (UNITS OF MEASUREMENT AND MARKING OF CYLINDERS) OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT STANAG 3056. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED, THE DEPARTMENTAL CUSTODIAN WILL INFORM THEIR RESPECTIVE DEPARTMENTAL STANDARDIZATION OFFICE SO THAT APPROPRIATE ACTION MAY BE TAKEN RESPECTING THE INTERNATIONAL AGREEMENT CONCERNED.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 29 May 58 REVISED (A) 13 NOV 59

Review activities:
ARMY - AV
NAVY - AS
USAF - 11, 99

User activities:
USAF - 99
Other Cust
ARMY - AV
NAVY - AS
USAF - 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Recipients for all new engineering and design applications and for reprintings are shall be made from this document.

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
	SEE NOTE	CYLINDER, OXYGEN, LOW PRESSURE	MS21227
PROCUREMENT SPECIFICATION: MIL-C-5886		SUPERSEDES: TYPES LISTED IN TABLE	SHEET 1 OF 1

DD FORM 672-1 (Coordinated)

1660-0337

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:28Z
Check the source to verify that this is the current version before use.