This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

User activities: Army ME, AM, WC; Navy MC, SH; Air Force

Reviewer activities: Army MI, MU, AT; Navy AS, OS; Air Force 11

FED SUP CLASS
5935

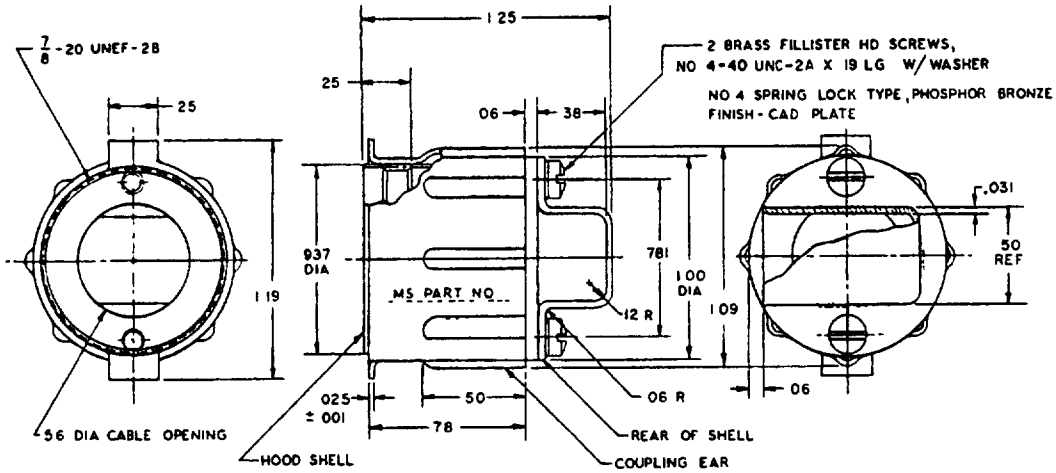

INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.25	6.35	.781	19.84
.025	.64	.38	9 65	.937	23.80
.031	.79	44	11 18	1.00	25.40
.06	1.52	.50	12 70	1 09	27.69
.12	3.05	.56	14.22	1.19	30.23
.19	4.83	.78	19.81	1.25	31.75

MS Part No	MS24129-1

INACTIVE FOR NEW DESIGN

(C) AFTER 6 DECEMBER 1971

NOTES:
1. Material - Brass, spec. QQ-B-613, comp. 2, half hard finish. Cadmium plate, spec. QQ-P-416, type II, class 3.
2. MS24129-1 to be used in conjunction with MS24128-1 (ring-coupling, fixed) and MS24127-1 (nut-plain).
3. Coupling ear to be free and independent of hood shell.
4. The rear of shell shall be made detachable for maintenance purposes.
5. All dimensions in inches: Unless otherwise specified, tolerances are ±.02 (.51 mm) for two place decimals, and ±.005 (.13 mm) for three place decimals.
6. Referenced documents shall be of the issue in effect on the date of invitation for bids.
7. This standard takes precedence over documents referenced herein.
8. Group A and B inspection is required in lieu of qualification.

(C) REDRAWN

APPROVED 31 AUG 1954 REVISED (C) 6 Dec 1971

P A NAVY-EC Other Cust AF-80 ARMY-EL	International interest	TITLE HOOD, ELECTRICAL CONNECTOR, RIGHT ANGLE	MILITARY STANDARD MS24129
Procurement Specification MIL-C-28748		SUPERSEDES	SHEET 1 OF 1

DD FORM 10 APR 64 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-1722-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:47Z
Check the source to verify that this is the current version before use.