FED SUP CLASS
5935

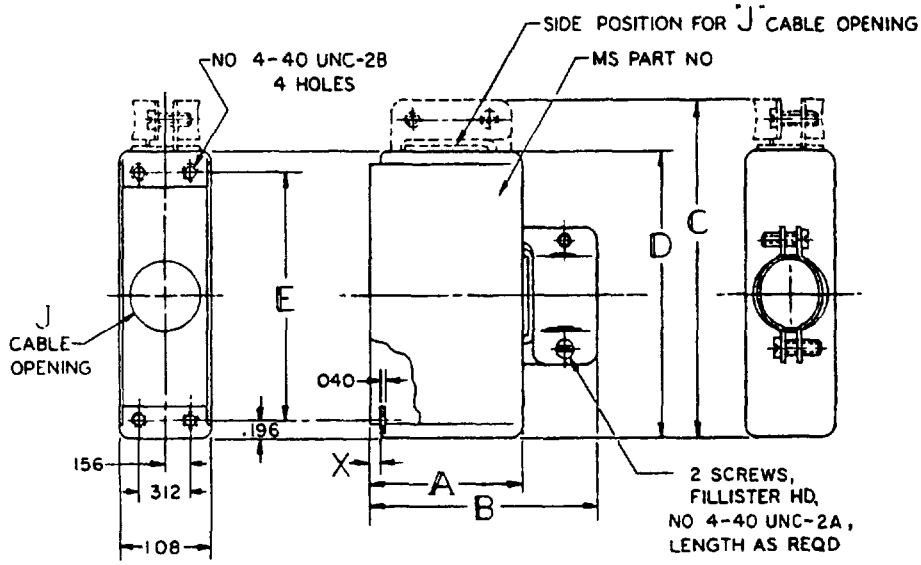

MS Part number	A	B ±.12	C ± 12	D	E	J	K	Used with
MS24131R1	1.58	2.05	----	2.08	1.687	.53	.19	MS24033
MS24131S1		----	2.55					MS24034

INCHES	MM	INCHES	MM	INCHES	MM
040	1.02	.312	7.92	2.05	52.07
.12	3.05	.53	13.46	2.08	52.83
.156	3.96	1.08	27.43	2.55	64 77
.19	4.83	1.58	40.13		
.196	4.98	1.687	42.85		

Ⓒ INACTIVE FOR NEW DESIGN
AFTER 6 DECEMBER 1971

NOTES:
1. Material - Aluminum alloy, specification QQ-A-318, temper H22.
   Finish - Anodize, specification MIL-A-8625, type I or type II or chromate, specification MIL-C-5541.
2. For hood with straight (top) cable opening use MS24131R1
   For hood with side cable opening use MS24131S1
3. Dimensions in inches: Unless otherwise specified, tolerances are ±.02 (.51 mm) for two place decimals and ±.005(.13 mm) for three place decimals.
4. Referenced documents shall be of the issue in effect on the date of invitation of bids.
5. This standard takes precedence over documents referenced herein.
6. Group A and B inspection is required in lieu of qualification

Ⓒ REDRAWN

APPROVED 12 AUG 56 REVISED Ⓒ 6 Dec 1971

User activities: Army ME, AM, WC; Navy MC, SH; Air Force
Reviewer activities: Army MI, MU, AT; Navy AS, OS; Air Force 11

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P A NAVY-EC Other Cust AF-80 ARMY-EL	International interest	TITLE: HOOD, ELECTRICAL, FOR 13 AMP. CONNECTOR	MILITARY STANDARD MS24131
Procurement Specification: MIL-C-28748		SUPERSEDES	SHEET 1 OF 1

DD FORM 10 APR 64 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-1722-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:47Z
Check the source to verify that this is the current version before use.