2-670

FED. SUP CLASS
5960

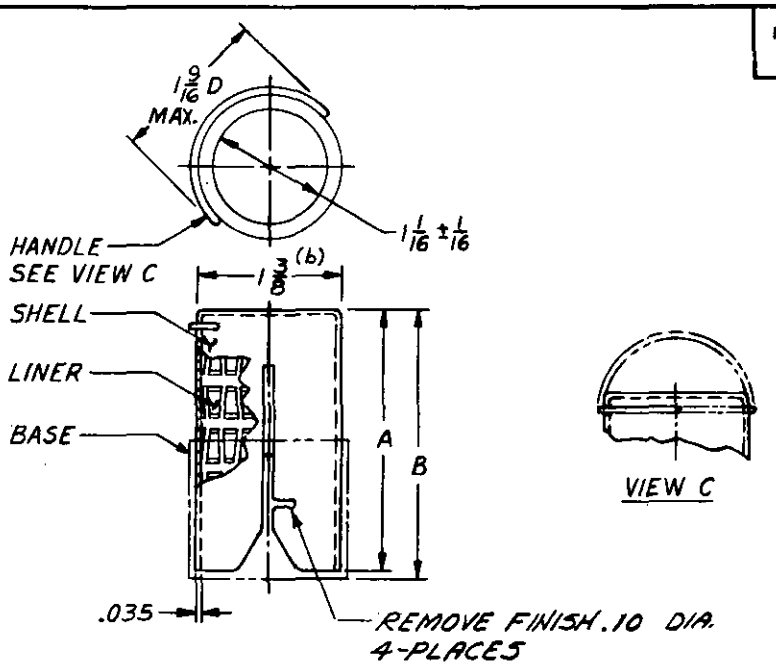


| MS PART NO. | A ±1/16 | B MAX. | WEIGHT GRAMS MAX. | TUBE ENVELOPE STYLE T9 (a) LENGTH | USE WITH HEADER |
|---|---|---|---|---|---|
| MS24270-1 | 1 11/16 | 1 15/16 | 19.5 | 1 3/4 | MS24271-1 ONLY |
| MS24270-2 | 1 15/16 | 2 3/16 | 20.7 | 2 1/16 | |
| MS24270-3 | 2 3/16 | 2 7/16 | 22.0 | 2 5/16 | |
| MS24270-4 | 2 7/16 | 2 11/16 | 23.2 | 2 1/2 | MS24271-2 ONLY |
| MS24270-5 | 2 9/16 | 2 13/16 | 26.5 | 2 11/16 | |
| MS24270-6 | 2 11/16 | 2 15/16 | 27.7 | 2 3/4 | |
| MS24270-7 | 2 15/16 | 3 3/16 | 29.0 | 3 1/16 | |
| MS24270-8 | 3 3/16 | 3 7/16 | 31.0 | 3 1/4 | |

(a) For reference purpose only

Material: Handle; Beryllium Copper Wire Spec. QQ-C-530
Liner; Beryllium Copper Spec. QQ-C-533
Shell; Aluminum Spec. WW-T-789, Condition T6

Heat treatment: Liner; Heat treat full hard

Finish: Handle; Chemical oxide Spec. MIL-F-495 and Henderlube 502A8 or equal
Liner; Chemical oxide Spec. MIL-F-495 and Henderlube 502A8 or equal
Shell; Anodize Spec. MIL-A-8625 and Henderlube 502A8 or equal

Dimensions in inches. Unless otherwise specified, tolerances: fractions ±1/64, decimals ±.005 and ±.01

Installation force shall not exceed 20 lbs to install shield over tube. No tool required for application or removal of shield from tube and mounting base. Top end of shield open. Engaging torque: 20 pound inches max.

(b) Out-Of-Round resulting from slotting and forming shall not be cause for rejection.

## (B) CANCELED AFTER 17 JULY 1967 USE MIL-S-24251/7

This standard takes precedence over documents referenced herein.

Referenced documents shall be the issue in effect on date of invitations for bid.

This standard has been approved by the Department of the Air Force and is mandatory for use by that department. All other military activities are required to employ this standard where suitable.

APPROVED 10 Mar 60 REVISED (A) 8 Jun 61 (B) 17 JULY 1967

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

| CUSTODIANS | OTHER INT. | MILITARY STANDARD | MS24270 (USAF) |
|---|---|---|---|
| Air Force -11 | A - N - AF - | SHIELD, ELECTRON TUBE-HEAT DISSIPATING, OCTAL, T9 | |
| Procurement Specification MIL-S-9372 | | SUPERSEDES: | SHEET \| OF \| |

DD FORM 672
1 OCT 52

*U.S. GOVERNMENT PRINTING OFFICE: 1967-301-510-/670

Source: https://assist.dla.mil -- Downloaded: 20260-23T14:51Z
Check the source to verify that this is the current version before use.