FED SUP CLASS.
5935

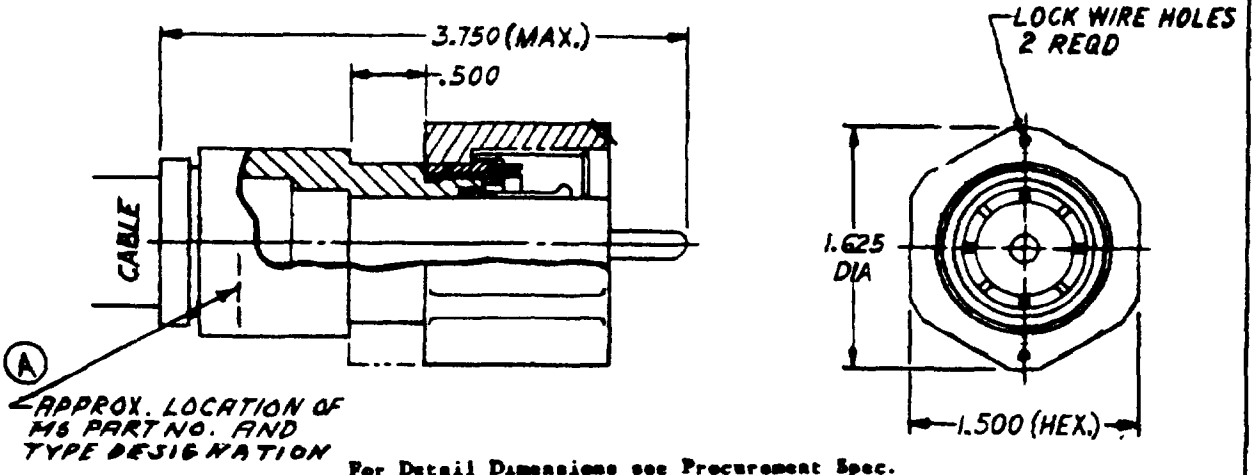

For Detail Dimensions see Procurement Spec.

MS PART NO.	CABLE
MS24281-1	RG-211/U
MS24281-2	RG-289/U

Dimensions in inches. Unless otherwise specified, tolerances: decimals ±.005

Max. weight: 6 1/2 oz

Concentricity, maximum indicator reading .002

These values apply to sample cable assemblies as defined in MIL-C-26637

VSWR: 1.2:1 max. (Measured over the frequency range 30 to 5000 MC/sec. steps of 50 MC/sec.)

Insertion loss: 0.3 db Max. (At 5000 MC/sec.)

Corona level: 7000 volts RMS min (Sea level)
1700 volts RMS min (At altitude)

High potential: 10000 volts RMS (Sea level)
2500 volts RMS (At altitude)

Power handling capability: 500 watts CW at 5000 MC (Max. temperature rise not to exceed 20° F when tested at 70000 ft altitude at 205° F)

High potential after moisture resistance: 7500 volts RMS

High Potential after vibration: 7500 volts RMS

High potential after shock: 7500 volts RMS

Cable pull: 250 pounds

Coupling nut pull: 250 pounds

Gage tests for center contacts not applicable.

Dimensions of gages for outer contacts: Ring A 0.794 ID
Ring B 0.804 ID

This standard takes precedence over documents referenced herein.

Referenced documents shall be the issue in effect on date of invitations for bid.

This standard has been approved by the department of the Air Force and is mandatory for use by that department. All other military activities are required to employ this standard where suitable.

APPROVED 5 Jan 60 REVISED (A) 18 Oct 60

CUSTODIANS	OTHER INT.	MILITARY STANDARD	MS24281 (USAF)
Air Force	A - N - AF -	CONNECTOR, PLUG, ELECTRICAL, LT SERIES UG-1305/U	
Procurement Specification: MIL-C-26637		SUPERSEDES:	SHEET 1 OF 1

DD FORM 672

GPO 805862

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.