FED. SUP CLASS.
5930

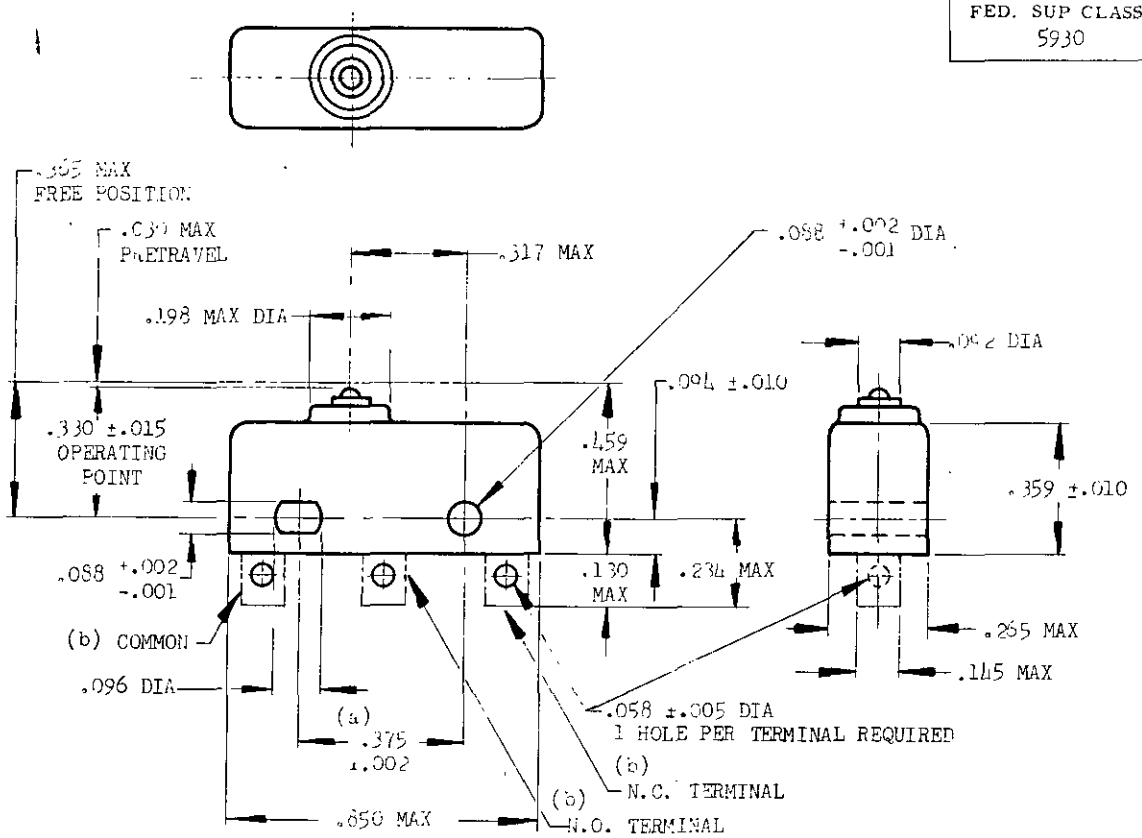

DETAIL REQUIREMENTS

(A)	CONTACT ARRANGEMENT	SINGLE POLE DOUBLE THROW
(B)	RATED LOAD:	
	RESISTIVE (D-C 28 VOLTS)	4 AMP
	RESISTIVE (A-C 400-CYCLES, 115/200 VOLTS)	5 AMP
	INDUCTIVE (D-C 28 VOLTS)	2.5 AMP
	INDUCTIVE (A-C 400-CYCLES, 115/200 VOLTS)	5 AMP
(C)	MINIMUM OPERATING CYCLES	25,000
(D)	ACTUATING FORCE	5 OZ MAX
(E)	RELEASE FORCE	1 OZ MIN
(F)	MOVEMENT DIFFERENTIAL	.004 INCH MAX
(G)	PRETRAVEL	.030 INCH MAX
(H)	OVERTRAVEL	.005 INCH MIN
(I)	STRENGTH OF PLUNGER PIN AND PIN STOP	25 LB
(J)	STRENGTH OF TERMINALS	20 LB
(K)	MAXIMUM WEIGHT	.05 LB

MS PART NO.	FIIN
MS3505-1	

(a) MOUNTING HOLES WILL ACCEPT .1 MAXIMUM DIAMETER PINS OR SCREWS ON .375 ±.002 CENTERS.
(b) TERMINAL CONTOUR AND FACING DIRECTION OPTIONAL WITHIN MAX DIMENSIONS SHOWN. TERMINALS ARE PLATED FOR SOLDERING.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005.

(C) **CANCELED** AFTER 8 APRIL 1966. FOR PROCUREMENT USE MIL-S-8805/2.

APPROVED 26 Jul 54 REVISED (A) 12 Jan 55 (B) 30 Aug 57 (C) 8 Apr 66

CUSTODIANS	OTHER INT.
Navy - BuAer	A -
Air Force	N -
	AF -

MILITARY STANDARD

SWITCH, SENSITIVE, SUB-MINIATURE

MS25085 (ASG)

Procurement Specification	SUPERSEDES:	SHEET 1 OF 1
MIL-S-6743		

DD FORM 672
1 OCT 52

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:03Z
Check the source to verify that this is the current version before use.