FED. SUP CLASS.
6115

TERMINAL BLOCK TO BE IN ACCORDANCE WITH MS33631 TERMINAL BLOCK PROVIDING CONNECTIONS FOR T_1 THRU T_6 SHALL BE LOCATED IN AREA "A". ALL OTHER CONNECTIONS SHALL BE LOCATED IN AREA "AA".

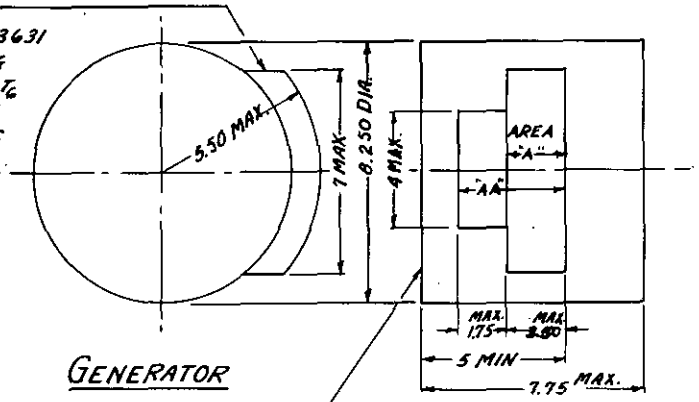

GENERATOR

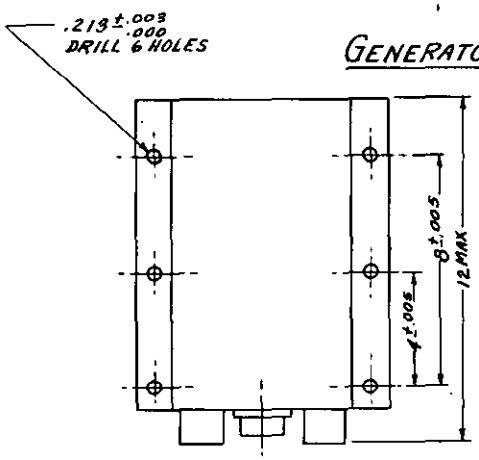

THE MOUNTING FLANGE AND COUPLING SHALL BE IN ACCORDANCE WITH MS25229.

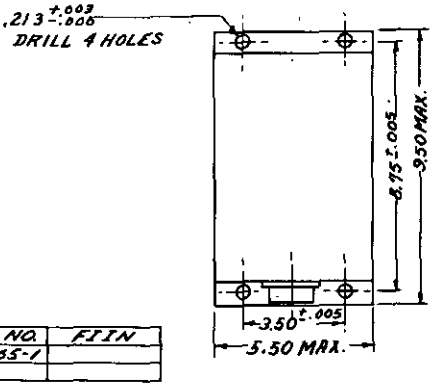

PART NO.	FIIN
MS25265-1	

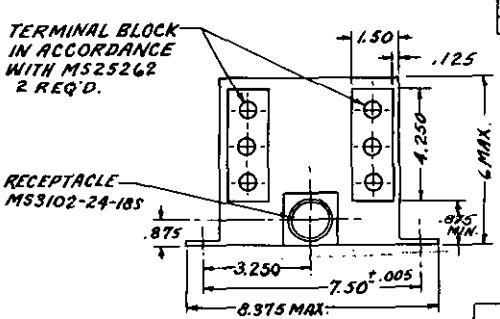

EXCITER

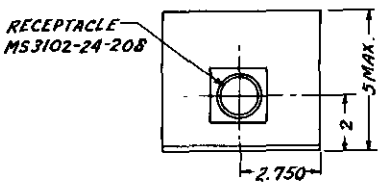

REGULATOR

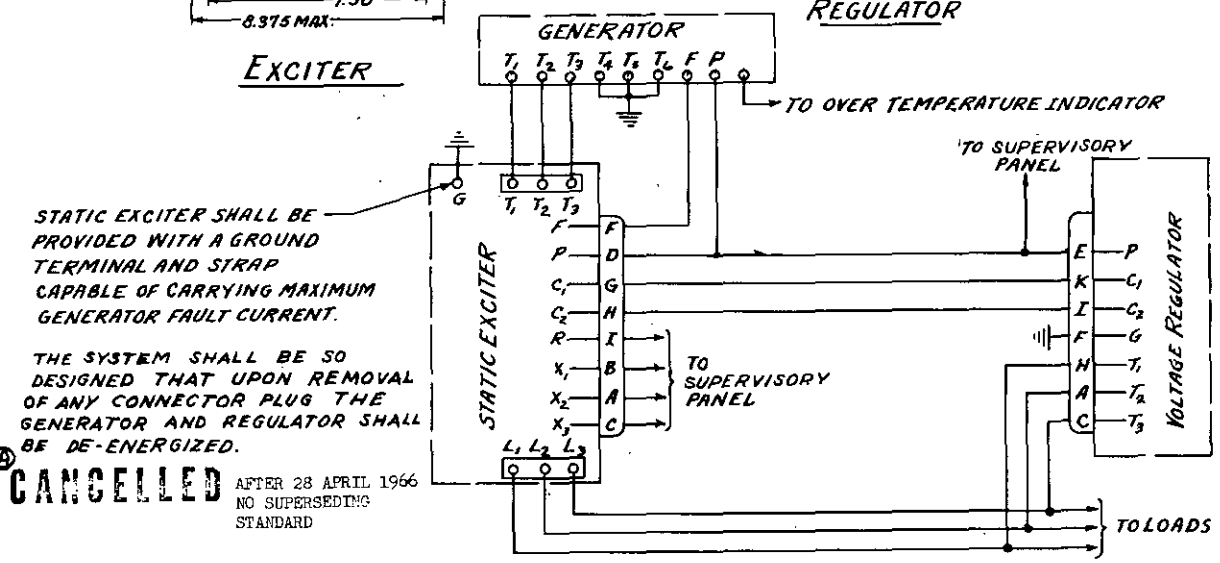

STATIC EXCITER SHALL BE PROVIDED WITH A GROUND TERMINAL AND STRAP CAPABLE OF CARRYING MAXIMUM GENERATOR FAULT CURRENT.

THE SYSTEM SHALL BE SO DESIGNED THAT UPON REMOVAL OF ANY CONNECTOR PLUG THE GENERATOR AND REGULATOR SHALL BE DE-ENERGIZED.

Ⓐ CANCELLED AFTER 28 APRIL 1966 NO SUPERSEDING STANDARD

WIRING

ALL DIMENSIONS IN INCHES
TOLERANCE ALL DIMENSIONS ±.06" UNLESS NOTED. ALL OUTLINE DIMENSIONS ARE LIMITING ONLY.

APPROVED 12 SEPT 1957 REVISED Ⓐ 28 April 1966

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

CUSTODIANS	OTHER INT.
Navy - BuAer	A -
	N -
	AF -

PROCUREMENT SPECIFICATION MIL-G-6099-A

MILITARY STANDARD

GENERATOR & REGULATOR, A.C., AIRCRAFT, STATIC EXCITER, LIQUID COOLED, 20 KVA, 3 PHASE, 380-420 CPS

SUPERSEDES:

MS25265 (AER)

SHEET 1 OF 1

Source: https://assist.dla.mil - Downloaded: 2026-02-23T15:07:2
Check the source to verify that this is the current version before use.

DD FORM 672-1