INCH-POUND

MS27470G
~~12 July 2002~~
SUPERSEDING
MS27470F
2 January 1976

DETAIL SPECIFICATION SHEET

CONNECTORS, RECEPTACLE, ELECTRICAL, JAM NUT
MOUNTING, SOLDER TYPE, HERMETIC SEAL, SERIES I

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein
shall consist of this specification and MIL-DTL-38999.




STYLE P

FIGURE 1. ~~Plug, class Y~~.


~~DISTRIBUTION STATEMENT A~~. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:40Z
Check the source to verify that this is the current version before use.

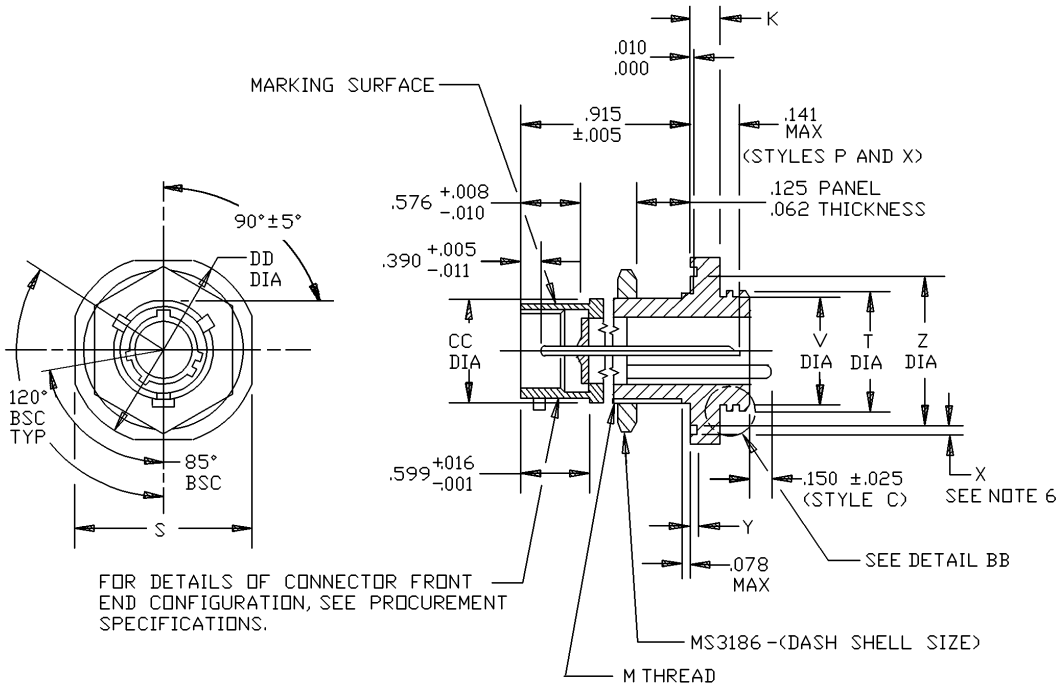





DETAIL BB

STYLE S

FIGURE 1. ~~Plug, class Y~~ - Continued.

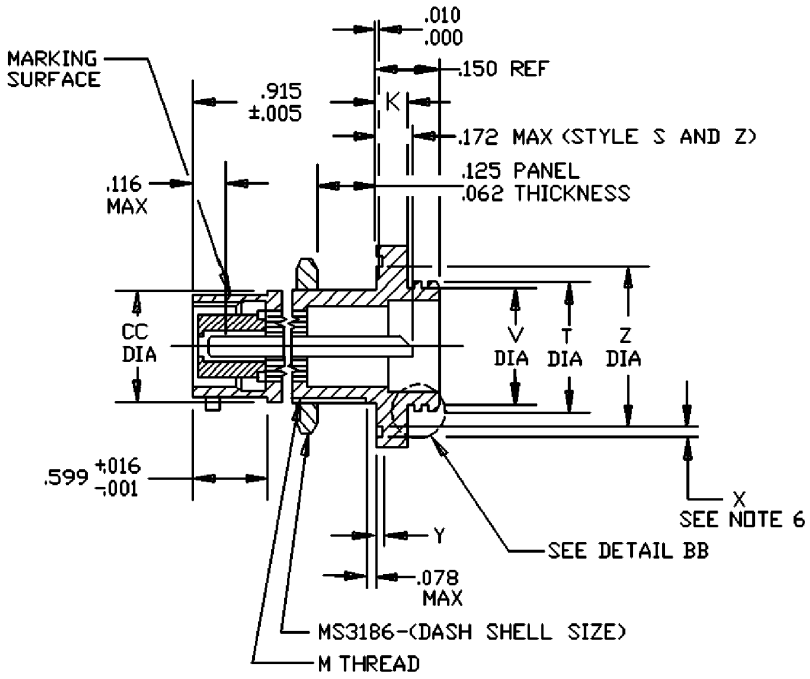

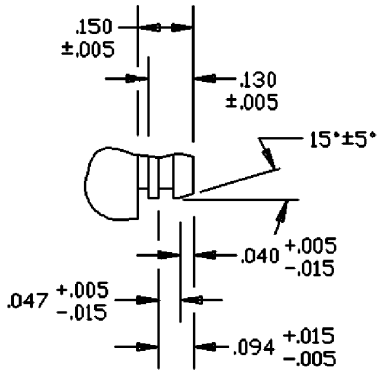Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:40Z
Check the source to verify that this is the current version before use.

| Shell size | Recommended packing ("O" Ring) AS3578- see note 7 | Recommended potting mold M85049/74- |
|---|---|---|
| 9 | 019 | 10-1 |
| 11 | 022 | 12-1 |
| 13 | 024 | 14-1 |
| 15 | 026 | 16-1 |
| 17 | 028 | 18-1 |
| 19 | 128 | 20-1 |
| 21 | 130 | 22-1 |
| 23 | 132 | 24-1 |
| 25 | 134 | 28-1 |

| Shell size | CC dia +.000 -.010 | DD dia ±.016 | K ±.016 | M THD Class 2 A UNEF (Plated) | S ±.016 | T dia +.011 -.000 | V dia ±.011 | X +.005 -.001 | Y ±.005 | Z dia +.006 -.005 |
|---|---|---|---|---|---|---|---|---|---|---|
| 9 | .655 | 1.188 | .109 | .6875-24 | 1.062 | .642 | .602 | .094 | .045 | .777 |
| 11 | .755 | 1.375 | | .8125-20 | 1.250 | .766 | .726 | | | .965 |
| 13 | .942 | 1.500 | | 1.000-20 | 1.375 | .892 | .852 | | | 1.090 |
| 15 | 1.066 | 1.625 | | 1.125-18 | 1.500 | 1.018 | .978 | | | 1.215 |
| 17 | 1.191 | 1.750 | | 1.250-18 | 1.625 | 1.142 | 1.102 | | | 1.340 |
| 19 | 1.316 | 1.938 | .140 | 1.375-18 | 1.812 | 1.268 | 1.228 | .141 | .075 | 1.449 |
| 21 | 1.441 | 2.062 | | 1.500-18 | 1.938 | 1.392 | 1.352 | | | 1.574 |
| 23 | 1.566 | 2.188 | | 1.625-18 | 2.062 | 1.518 | 1.478 | | | 1.699 |
| 25 | 1.691 | 2.312 | | 1.750-18 UNS | 2.188 | 1.642 | 1.602 | | | 1.824 |

STYLES P and S

FIGURE 1. Plug, class Y - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:40Z
Check the source to verify that this is the current version before use.

| Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|
| .001 | 0.03 | .156 | 3.96 | .965 | 24.51 | 1.375 | 34.93 |
| .003 | 0.08 | .172 | 4.37 | .978 | 24.84 | 1.392 | 35.36 |
| .005 | 0.13 | .390 | 9.91 | .980 | 24.89 | 1.441 | 36.60 |
| .008 | 0.20 | .403 | 10.24 | 1.018 | 25.86 | 1.449 | 36.80 |
| .010 | 0.25 | .515 | 13.08 | 1.062 | 26.97 | 1.478 | 37.54 |
| .011 | 0.29 | .576 | 13.49 | 1.066 | 27.08 | 1.500 | 38.10 |
| .015 | 0.38 | .599 | 15.21 | 1.090 | 27.69 | 1.518 | 38.56 |
| .016 | 0.41 | .602 | 15.29 | 1.102 | 27.99 | 1.566 | 39.78 |
| .020 | 0.51 | .629 | 15.98 | 1.105 | 28.47 | 1.574 | 39.98 |
| .040 | 1.02 | .642 | 16.31 | 1.142 | 29.01 | 1.602 | 40.69 |
| .045 | 1.14 | .655 | 16.64 | 1.188 | 30.18 | 1.625 | 41.28 |
| .047 | 1.19 | .726 | 18.44 | 1.191 | 30.25 | 1.642 | 41.71 |
| .062 | 1.57 | .754 | 19.15 | 1.215 | 30.86 | 1.691 | 42.95 |
| .075 | 1.91 | .755 | 19.18 | 1.228 | 31.19 | 1.699 | 43.15 |
| .078 | 1.98 | .766 | 19.46 | 1.230 | 31.24 | 1.750 | 44.45 |
| .094 | 2.39 | .777 | 19.74 | 1.250 | 31.75 | 1.812 | 46.02 |
| .116 | 2.95 | .852 | 21.64 | 1.268 | 32.21 | 1.824 | 46.33 |
| .125 | 3.18 | .879 | 22.33 | 1.316 | 33.43 | 1.938 | 49.23 |
| .130 | 3.30 | .892 | 22.66 | 1.340 | 34.04 | 2.062 | 52.37 |
| .141 | 3.58 | .915 | 23.24 | 1.352 | 34.34 | 2.188 | 55.58 |
| .150 | 3.81 | .942 | 23.93 | 1.355 | 34.42 | 2.312 | 58.72 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. For main keyway and keyway positions, see MIL-DTL-38999.
4. Jam nut mounting receptacles shall be provided with an “O” ring.
5. Diameters M, DD and Z shall be concentric within .015 TIR.
6. Sides of groove may have 5° max taper.
7. Recommended packing is for dimensions only. Material is optional.

FIGURE 1. ~~Plug, class Y~~ - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:40Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.
Interface dimensions shall conform to MIL-DTL-38999.
Mating connectors: MS27467, MS27653 and MS27661.
Insert arrangements: See MIL-STD-1560.

Part or Identifying Number (PIN) example:




CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 11
DLA - CC

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 19, 99
DLA - IS

Preparing activity:
DLA - CC

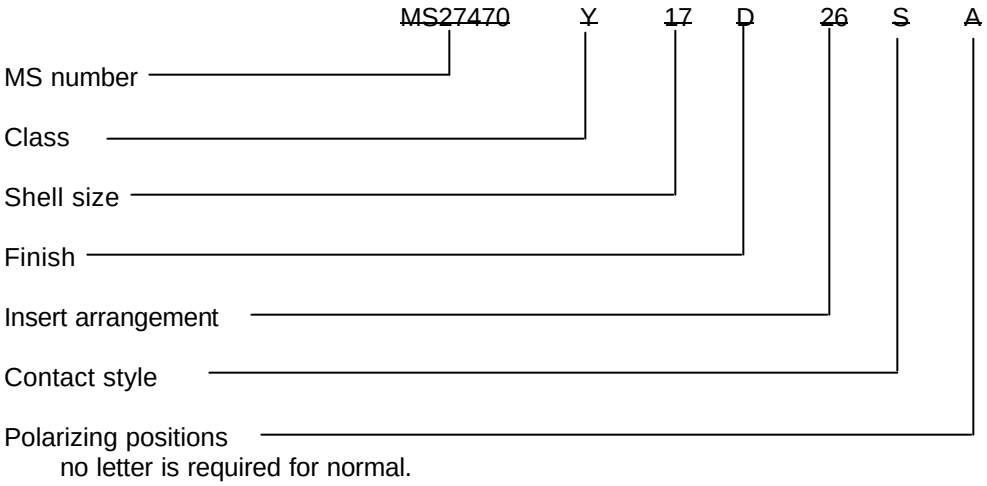(Project: 5935-4395)


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:40Z
Check the source to verify that this is the current version before use.