FED. SUP CLASS
5220

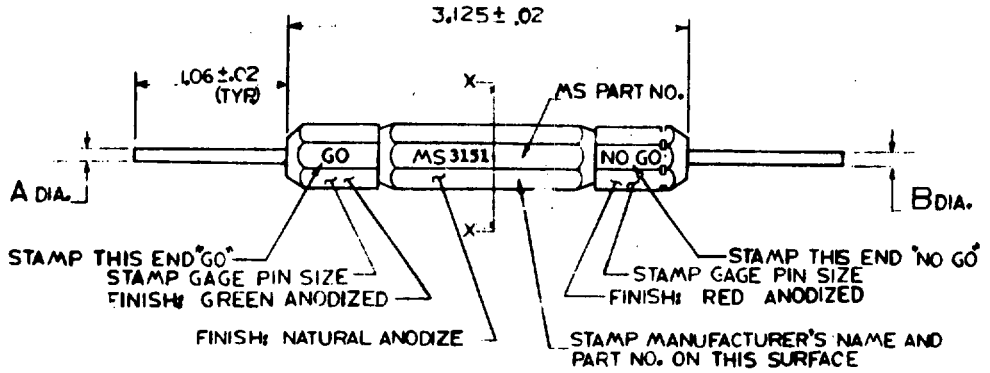

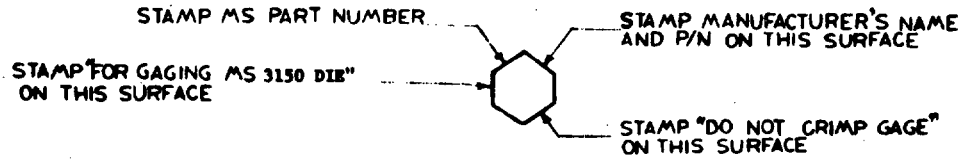

GAGE-IN-SERVICE INSPECTION

GAGE MS PART NO.	CRIMPING DIE PART NO. (REF)	±.0001 GO A DIA.	±.0001 NO GO B DIA.
MS3151-8	MS3150-8	.130	.136
MS3151-4	MS3150-4	.195	.202
MS3151-0	MS3150-0	.325	.332

NOTES:
1. GAGES SHALL BE FABRICATED IN ACCORDANCE WITH DEPT. OF COMMERCE COMMERCIAL STANDARD CS8.
2. MATERIALS: GAGE PINS, ALLOY TOOL STEEL, SPECIFICATION QQ-T-570, CLASS OPTIONAL, HARDENED TO ROCKWELL C55-60 AND GRIND. GAGE HANDLES, ALUMINUM ALLOY, PER DEPT. OF COMMERCE COMMERCIAL STANDARD CS8
3. FINISH: GAGE PINS, CHROME FLASH, .0002 TO .0003 THICK, PER SPECIFICATION QQ-C-320.
4. DIMENSIONS OF A AND B ARE AFTER CHROME FLASHING. TOLERANCE, CLASS Z, PER HANDBOOK H-28.
5. DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED.
6. ALL STAMPING TO BE .093 HIGH AND INDENTED.

APPROVED 1 Apr 1971 REVISED

This military standard is approved by Department of the Navy and is mandatory for use by that activity. All other military activities are required to comply with standard upon contract.

P.A. NAVY-AS Other Cust	TITLE GAGE-IN-SERVICE INSPECTION; FOR MS 3150 CRIMPING DIES	MILITARY STANDARD
		MS 3151 (NAVY)
PROCUREMENT SPECIFICATION CS 8	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Limited Coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PROJECT NO. 5220-N125

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:00Z
Check the source to verify that this is the current version before use.