FED SUP CLASS
5935

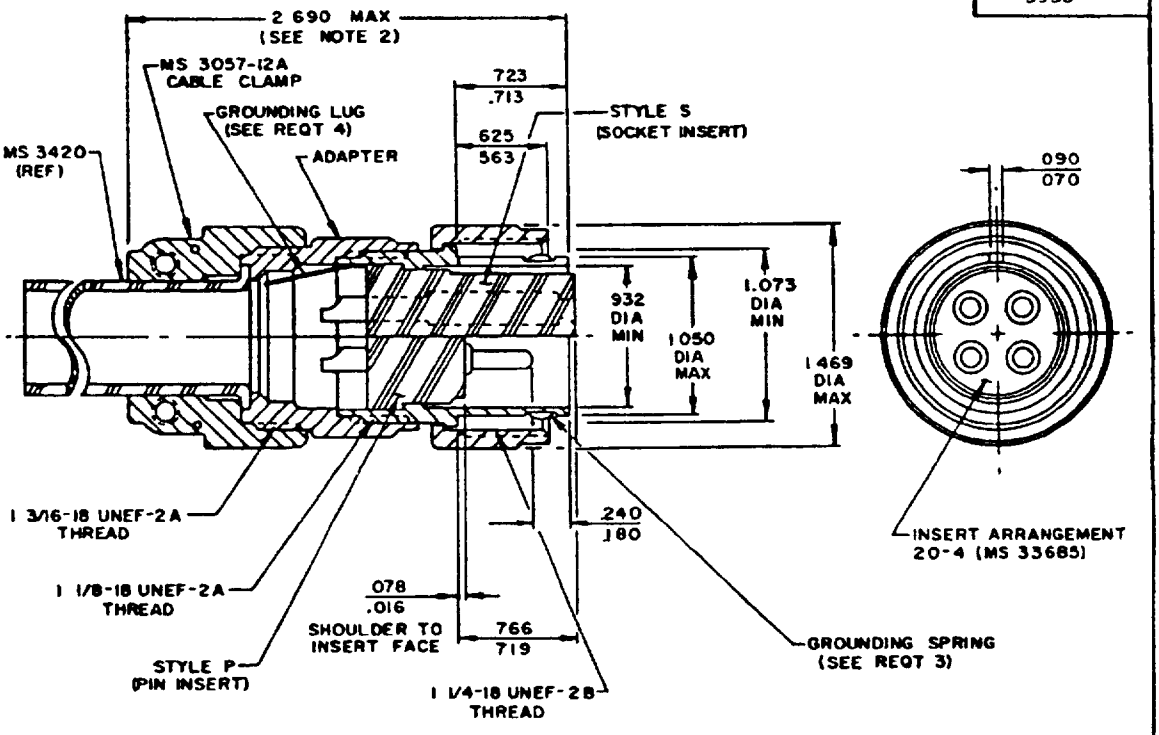

NOTES

1 DIMENSIONS IN INCHES DIMENSIONING AND TOLERANCING IN ACCORDANCE WITH ANSI Y14 5-1973.
2 DIMENSIONS BASED ON FULLY TIGHTENED ACCESSORIES

REQUIREMENTS

1 MATERIAL
GROUNDING SPRINGS - BERYLLIUM COPPER
2. FINISH
SHELL AND ACCESSORIES - OLIVE DRAB CHROMATE COATING OVER CADMIUM PLATE.
3. THERE SHALL BE A MINIMUM OF 8 GROUNDING SPRINGS PER INCH
4. THE GROUNDING LUG SHALL BE INSTALLED ADJACENT TO PIN 'D'
5 CONNECTOR SHALL MEET REQUIREMENTS OF MIL-C-5015 EXCEPT WHERE MODIFIED FOR SPECIAL GROUNDING FUNCTIONS
6. CABLE CLAMP SHALL CONFORM TO MS3057-12A.

EXAMPLE OF PART NUMBER MS3436A20-4S

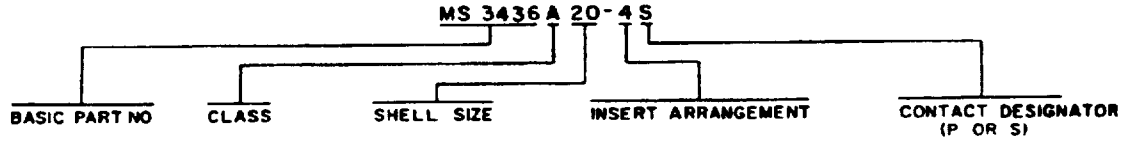

FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID

A ENTIRE STANDARD REVISED AND REDRAWN

APPROVED 2 OCT 73 REVISED A 7 Oct 1974

REVIEW ACTIVITIES
NAVY - EC

This military standard is approved by the Department of the NAVY and shall be used by all activity. All other military activities are required to employ it as standard where suitable

P.A. NAVY – AS Other Cust	TITLE CONNECTOR, PLUG, ELECTRIC, SOLDER CONTACT, UTILITY	MILITARY STANDARD MS3436(NAVY)
PROCUREMENT SPECIFICATION MIL-C-5015	SUPERSEDES	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:05Z
Check the source to verify that this is the current version before use.