A-A-238B
October 18, 1983
SUPERSEDING
A-A-238A
December 22, 1982

COMMERCIAL ITEM DESCRIPTION

SEAT, WATER CLOSET

The General Services Administration has authorized the use of this commercial item description in preference to Interim Federal Specification WW-S-001912 which has been canceled.

This description covers water closet seats of the following types for industrial (Ind) and residential (Res) use:

Type	Color	Shape	Cover	Hinge Type
A (Ind)	Black	Elongated, Open	No	Self-Sustaining or Check
B (Ind)	White	Elongated, Open	No	Self-Sustaining or Check
C (Ind)	White	Regular, Open	No	Free Rotation
D (Res)	White	Regular, Closed	Yes	Free Rotation

Salient characteristics:

Thickness. Minimum thickness of seats shall be measured along a line at the arm at the widest part of the seat between the front and the centerline of rotation in the back. Thickness shall be determined by measuring at the cross-section midpoint and thickest point, and average. Thickness shall not be less than 5/8 inch. The minimum thickness of covers at or near the geometric center shall not be less than 1/4 inch. Thickness shall be defined as the solid mass measured between two planes.

Material -

Seat and seat covers. Solid plastic.

Hinges. Straight or offset; shall be free rotation type, check type, or self-sustaining type, as specified. Hinges for industrial seats must be metal or stainless steel and are to be either chrome plated or plastic covered. Hinges for residential seats must be plastic, metal, or stainless steel and are to be either chrome plated or plastic covered.

Bumpers. Shall be of any suitable plastic material. The bumper shall have a appearance comparable to the seat. Two or more bumpers shall be securely attached to the underside of each seat and of each cover. Seats shall have 1/16-inch minimum clearance above the seat. Integrally molded bumpers shall be acceptable.

Configuration. See Figure 1.

FSC 4510

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:06Z
Check the source to verify that this is the current version before use.

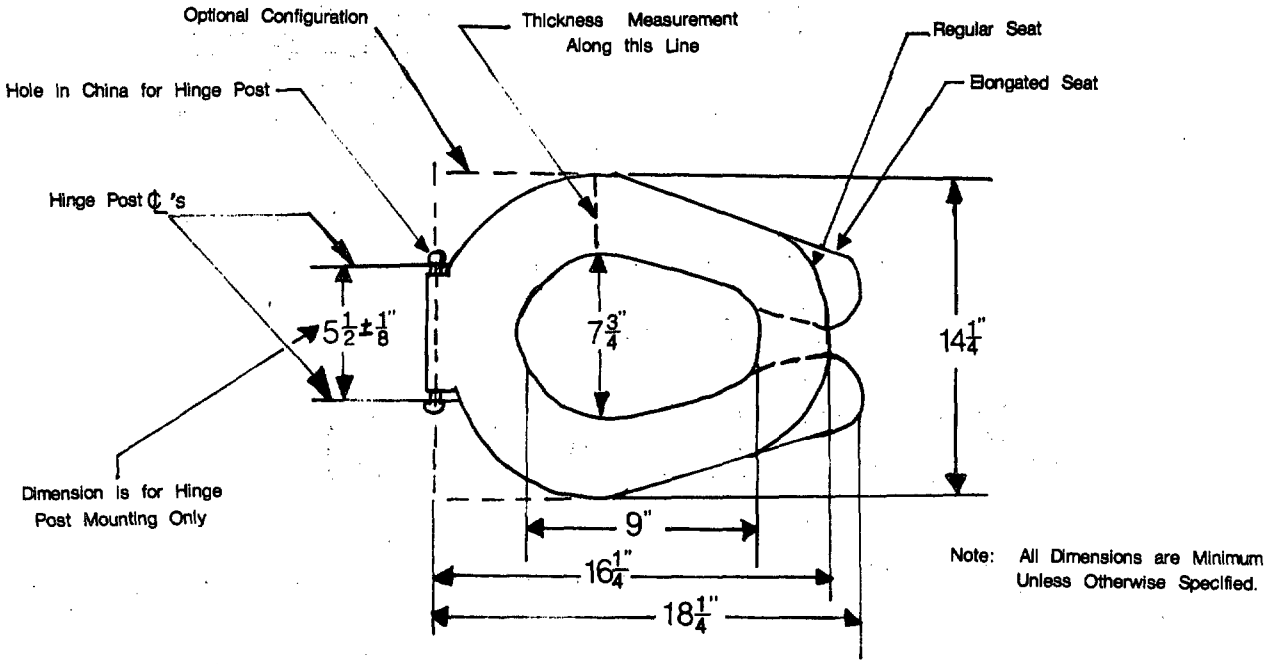


FIGURE 1. Seat Dimensions

Test Impact.

Testing shall withstand a designated impact without cracking or fracturing when a spherically faced dart of no more than a 2-inch radii is dropped on the test sample.

Seats shall be tested separately and shall withstand an impact of 30-ft-lbs. when impacted midway between the support provided by the front bumpers and the support the hinges provide at the rear.

Covers shall be tested, assembled to the seat and shall withstand an impact of 20-ft-lbs. at the geometric center. Test set-up shall be similar to the seat test.

Test Load.

Open or closed seats shall be set up similar to the method described under Impact Testing. A 300 lb. load shall be applied equally to both sides of the seat at the midpoint between the hinge and front bumper and held for one minute before release. After two hours relaxation at the point of contact to the flat surface, calculate the permanent set- not to exceed 1/10 inch.

Corrosion. Hinges shall be tested for corrosion in accordance with ASTM B 117 for a 24 hour period.

Workmanship. Seats shall have no sharp edges, slivers, burrs, deep scratches, tool marks or other defects which might affect serviceability; durability or appearance.

Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Preservation, packaging, packing, labeling, and marking. The preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

NOTE: The commercial item certification clause is not required when this commercial item description is used for procurement.

ASTM Standard D 117 is available from the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.

PREPARING ACTIVITY:

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:06Z
Check the source to verify that this is the current version before use.