
FED. SUP CLASS
3120

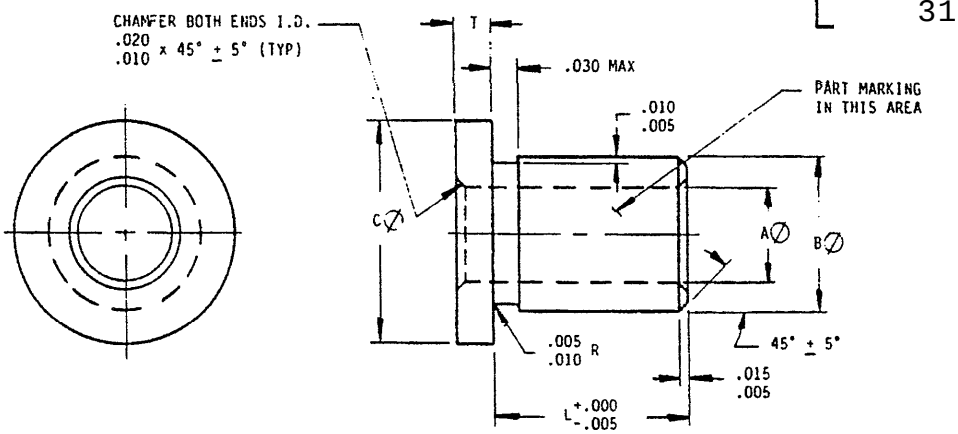

SIZE DASH NO.	NOM DIA.	A∅	B∅	RECM'D HOUSING BORE	INTERFERENCE FIT (REF)	C∅	T ±.002
-03	.1900	.177 .184	.3142 .3137	.3133 .3125	.0017 .0004	.447 .427	.062
-04	.2500	.235 .243	.3767 .3762	.3758 .3750	.0017 .0004	.510 .490	.062
-05	.3125	.299 .307	.4393 .4388	.4383 .4375	.0018 .0005	.572 .552	.062
-06	.3750	.356 .364	.5020 .5013	.5008 .5000	.0020 .0005	.635 .615	.062
-07	.4375	.421 .428	.5646 .5639	.5634 .5625	.0021 .0005	.697 .677	.062
-08	.5000	.483 .490	.6272 .6264	.6259 .6250	.0022 .0005	.760 .740	.062
-10	.6250	.608 .615	.8150 .8140	.8134 .8125	.0025 .0006	1.010 .990	.094
(A) -10A	.6250	.608 .615	.8150 .8140	.8134 .8125	.0025 .0006	1.010 .990	.062
-12	.7500	.732 .742	.9400 .9390	.9384 .9375	.0025 .0006	1.135 1.115	.094
-14	.8750	.857 .867	1.0651 1.0641	1.0635 1.0625	.0026 .0006	1.260 1.240	.094
-16	1.0000	.982 .992	1.1901 1.1891	1.1885 1.1875	.0026 .0006	1.385 1.365	.094
-18	1.1250	1.107 1.117	1.3151 1.3141	1.3135 1.3125	.0026 .0006	1.510 1.490	.125
-20	1.2500	1.232 1.242	1.4401 1.4391	1.4385 1.4375	.0026 .0006	1.635 1.615	.125

NOTES:

(A) 1. LENGTH TO BE SPECIFIED IN .010 INCH INCREMENTS. BUSHING LENGTHS ALLOWED TO BE CODED BY THIS STANDARD SHALL BE A MAXIMUM OF 5 TIMES THE NOMINAL BORE DIAMETER AND A MINIMUM OF 1/4 TIMES THE NOMINAL BORE DIAMETER.

2. DIAMETERS TO BE CONCENTRIC WITHIN .003 FIR.

3. DIMENSIONS TO BE MET AFTER PLATING.

4. ALL SURFACES 125 RMS OR SMOOTHER IN ACCORDANCE WITH ANSI B46.1.

5. THESE BUSHINGS INTENDED FOR REAMING ON ASSEMBLY.

6. DIMENSIONS ARE IN INCHES.

(A) REVISED AND REDRAWN

USER SYMBOLS:

REVIEWER SYMBOLS:
AF - 99
DLA - 1S

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE. DISTRIBUTION IS UNLIMITED
This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

AMSC N/A

APPROVED 15 OCT 1982
REVISED (A) 2 APR 1987

P.A. NAVY — AS Other Cust ARMY - AV AF - 11	TITLE: BUSHING, SLEEVE FLANGED, PRESS FIT, REAM TYPE	MILITARY STANDARD MS14238
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 MAR 72 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PROJECT NO. 3120 0659

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:37Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
3120

MATERIAL: STEEL - 4130 STEEL PER MIL-S-6758 OR MIL-T-6736
CORROSION RESISTANT STEEL - 17-4 PH PER AMS5643, PASSIVATE PER MIL-S-5002
ALUMINUM NICKEL BRONZE PER AMS4640
BERYLLIUM COPPER PER QQ-C-530, CONDITION H.T.

HEAT TREAT: STEEL - 125,000 - 145,000 PSI UTS
CORROSION RESISTANT STEEL - 135,000 - 170,000 PSI UTS

FINISH: CADMIUM PLATE OUTSIDE DIAMETER AND END SURFACES PER QQ-P-416 TTPE 11, CLASS 2. FLASH PERMITTED IN BORE .

PART MARKING: BUSHINGS WITH AN "L" DIMENSION OF .500 OR LONGER SHALL BE RUBBER STAMPED WITH THE SUPPLIERS NAME, TRADEMARK, OR CODE NUMBER, BASIC MILITARY STANDARD NUMBER (LESS MS PREFIX), MATERIAL CODE AND SIZE CODE. PACKAGES SHALL BE MARKED WITH THE SUPPLIERS NAME, TRADEMARK OR CODE NUMBER AND THE COMPLETE MILITARY STANDARD NUMBER FOR ALL BUSHING SIZES.

PART CALLOUT:

MS14238 ( )(,)( )

- LENGTH IN .010 INCREMENTS (SEE NOTE 1) ALWAYS 3 DIGITS)
- FINISH "" NO FINISH
  "P" CADMIUM PLATE
- SIZE DASH NO. (NOM. DIA.)
- MATERIAL "A" ALUMINUM NICKEL BRONZE
  "B" BERYLLIUM COPPER
  "C" CORROSION RESISTANT STEEL
  "S" ALLOY STEEL
- BASIC PART NUMBER

EXAMPLES:

MS14236S06P037 . BUSHING, FLANGED, STEEL, FOR .375 NOM. DIA., CADMIUM PLATED, .370 INCHES LONG

MS14238B16-500 = BUSHING, FLANGED, BERYLLIUM COPPER, FOR 1.000 NOM. DIA., UNPLATED, 5.0C INCHES LONG

IN THE EVENT OF A CONELICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN:.

APPROVED 15 OCT 1982
REVISED (A) FOR CHANGES SEE SHEET 1

USER SYMBOLS:

REVIEWER SYMBOLS:
AF - 99
DLA - IS

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE. DISTRIBUTION IS UNLIMITED
This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

AMSC N/A

P.A. NAVY-AS Other cust ARMY - AV AF - 11	TITLE BUSHING. SLEEVE FLANGED, PRESS FIT, REAN TYPE	MILITARY STANDARD MS 4238
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET OF

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:37Z
Check the source to verify that this is the current version before use.