
FED. SUP CLASS
6240

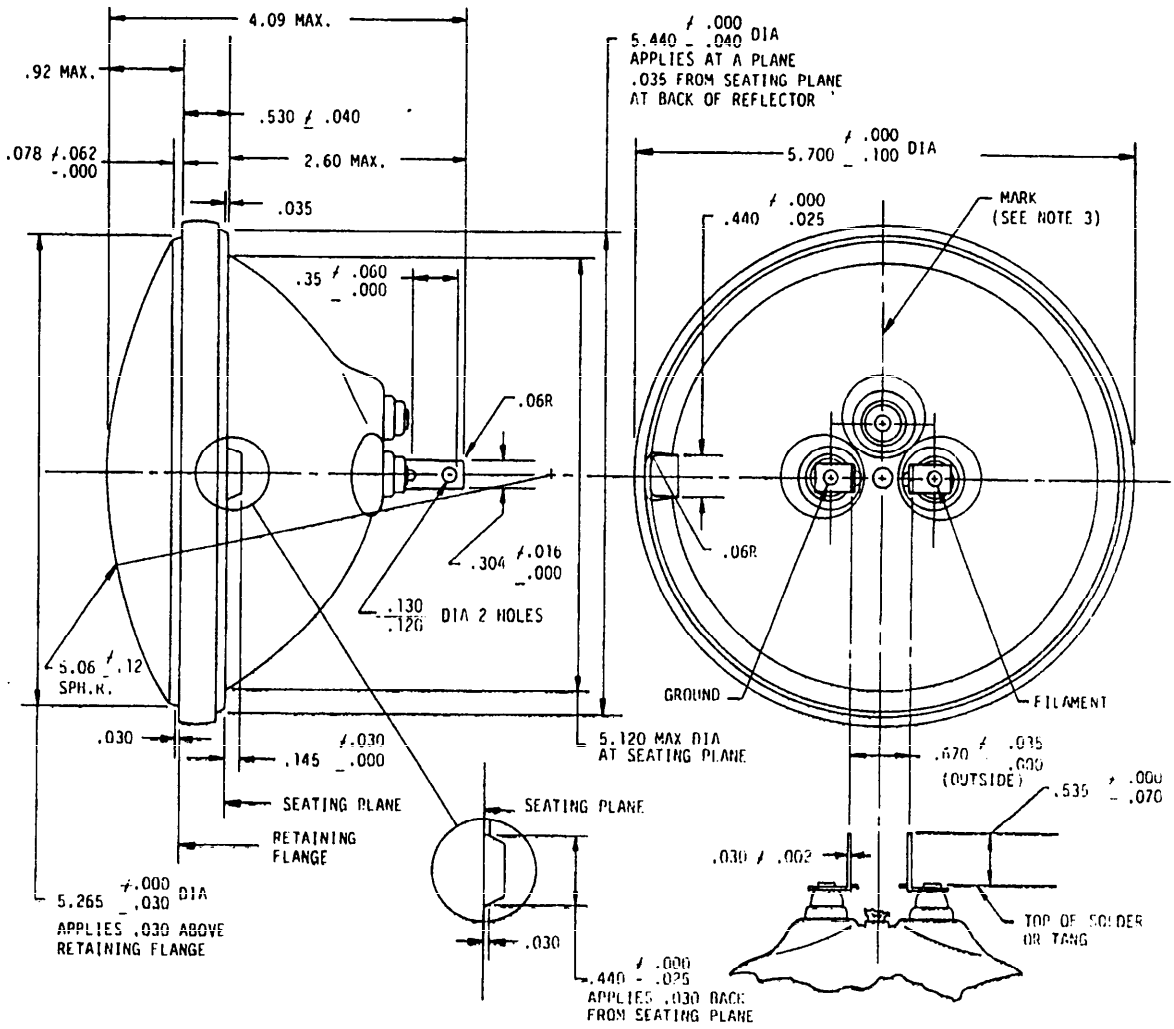

NOTE: INTERSECTION OF VERTICAL AND HORIZONTAL CENTERLINES THROUGH CONTACTS MUST FALL WITHIN .25 OF AXIS OF LAMP.

MS PART NO.	DESIGN		MAX. AMPS	INITIAL MAX. CP (APPROX.)	FIL. CONST.	BEAM SPREAD IN DEGREES (APPROX.)		HOURS LIFE (APPROX.)
	VOLTS	WATTS				HOR.	VERT.	
MS 17166-4880	28	60	2.3	6,000	2C-6 IN SERIES	40	7	800 AT 28V

NOTES:

1. ALL DIMENSIONS IN INCHES.
2. THE MS PART NUMBER CONSISTS OF THE MS NUMBER FOLLOWED BY A DASH NUMBER WHICH IS THE INDUSTRY TRADE NUMBER.
3. THE MS DASH NUMBER AND VOLTAGE SHALL BE PERMANENTLY MARKED ON REAR SURFACE OF LAMP.
4. THE TYPE OF SERVICE (HEADLAMP) SHALL BE PERMANENTLY MARKED ON LENS.
5. THE LAMP SHALL BE OF THE ALL-GLASS SEALED BEAM TYPE AND SHALL CONFORM TO S.A.E. J598 FOR SEALED LIGHTING UNIT FOR CONSTRUCTION AND INDUSTRIAL MACHINERY.
6. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.

(C) TITLE CORRECTED

REVIEW ACTIVITIES : 82
USER ACTIVITIES : YD, MC

APPROVED 20 JUNE 1960 REVISED (A) 31 JANUARY 1973 (B) 5 MARCH 1984 (C) 6 JULY 1984

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P. A. ME Other Cust AS 99	INTERNATIONAL INTEREST	TITLE LAMP, INCANDESCENT, PAR-46 24 VOLT HEADLAMP 2 CONTACT LUGS	MILITARY STANDARD MS 17166
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:		SHEET 1 OF 1

DD FORM 672-1 (COORDINATED)

PROJECT 6240-0362

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:04Z
Check the source to verify that this is the current version before use.